



## MS5840-02BA

Low profile, gel-filled, ultra-compact watertight pressure sensor

### DESCRIPTION

The MS5840 is an ultra-compact micro altimeter. It is optimized for altimeter and barometer applications. The altitude resolution at sea level is 13 cm of air.

The sensor module includes a high-linearity pressure sensor and an ultra-low power 24-bit  $\Delta\Sigma$  ADC with internal factory-calibrated coefficients. It provides a precise digital 24-bit pressure and temperature value and different operation modes that allow the user to optimize for conversion speed and current consumption.

A high-resolution temperature output allows the implementation of an altimeter/thermometer function without any additional sensor. The MS5840 can be interfaced to any microcontroller with I<sup>2</sup>C-bus interface. The communication protocol is simple, without the need of programming internal registers in the device. The gel protection and antimagnetic stainless-steel cap makes the module water resistant.

Small dimensions of only 3.3 mm x 3.3 mm x 1.7 mm allows integration in mobile devices. This sensor module generation is based on leading MEMS technology and latest benefits from TE Connectivity (TE) proven experience and know-how in high volume manufacturing of altimeter modules, which has been widely used for over a decade.

### FEATURES

- Ceramic - metal package, 3.3 x 3.3 x 1.7mm
- High-resolution module, 13 cm
- Supply voltage: 1.5 to 3.6 V
- Fast conversion down to 0.5 ms
- Low power, 0.6  $\mu$ A (standby  $\leq$  0.1  $\mu$ A at 25°C)
- Integrated digital pressure sensor (24 bit  $\Delta\Sigma$  ADC)
- Operating range: 300 to 1200 mbar, -20 to +85 °C
- I<sup>2</sup>C interface
- No external components (internal oscillator)
- Protected against direct sunlight
- Lid connected to ground option

### APPLICATIONS

- Adventure or multi-mode watches
- Mobile water depth measurement systems

**PERFORMANCE SPECIFICATIONS****ABSOLUTE MAXIMUM RATINGS**

| Parameter                                    | Symbol           | Conditions               | Min. | Typ. | Max  | Unit |
|----------------------------------------------|------------------|--------------------------|------|------|------|------|
| Supply voltage                               | V <sub>DD</sub>  |                          | -0.3 |      | +4   | V    |
| Storage temperature                          | T <sub>S</sub>   |                          | -40  |      | +85  | °C   |
| Overpressure                                 | P <sub>max</sub> | ISO 22810 <sup>(1)</sup> |      |      | 10   | bar  |
| Maximum Soldering Temperature <sup>(2)</sup> | T <sub>max</sub> | 40 sec. max              |      |      | 250  | °C   |
| ESD rating (lid to GND version)              |                  | Human Body Model         | -2   |      | +2   | kV   |
| Latch up                                     |                  | JEDEC JESD78 standard    | -100 |      | +100 | mA   |

<sup>(1)</sup> Pressure ramp up/down min 60s<sup>(2)</sup> Refer to application note 808**ELECTRICAL CHARACTERISTICS**

| Parameter                                               | Symbol          | Conditions                                        | Min. | Typ.                                           | Max | Unit |
|---------------------------------------------------------|-----------------|---------------------------------------------------|------|------------------------------------------------|-----|------|
| Operating Supply voltage                                | V <sub>DD</sub> |                                                   | 1.5  | 3.0                                            | 3.6 | V    |
| Operating Temperature                                   | T               |                                                   | -20  | +25                                            | +85 | °C   |
| Supply current<br>(1 sample per sec.)                   | I <sub>DD</sub> | OSR<br>8192<br>4096<br>2048<br>1024<br>512<br>256 |      | 20.09<br>10.05<br>5.02<br>2.51<br>1.26<br>0.63 |     | μA   |
| Peak supply current                                     |                 | during conversion                                 |      | 1.25                                           |     | mA   |
| Standby supply current                                  |                 | at 25°C<br>(V <sub>DD</sub> = 3.0 V)              |      | 0.01                                           | 0.1 | μA   |
| Power supply hold off for internal reset <sup>(3)</sup> |                 | V <sub>DD</sub> < 0.1V                            | 200  |                                                |     | ms   |
| VDD Capacitor                                           |                 | from VDD to GND                                   | 100  | 470                                            |     | nF   |
| Resistor value between the lid and the GND              |                 | Version 02BA2x only                               |      | 1000                                           |     | Ω    |

<sup>(3)</sup> Supply voltage power up must be continuous from GND to VDD without any step**ANALOG DIGITAL CONVERTER (ADC)**

| Parameter                          | Symbol         | Conditions                                        | Min. | Typ.                                          | Max                                          | Unit |
|------------------------------------|----------------|---------------------------------------------------|------|-----------------------------------------------|----------------------------------------------|------|
| Output Word                        |                |                                                   |      | 24                                            |                                              | bit  |
| ADC Conversion time <sup>(4)</sup> | t <sub>c</sub> | OSR<br>8192<br>4096<br>2048<br>1024<br>512<br>256 |      | 16.44<br>8.22<br>4.13<br>2.08<br>1.06<br>0.54 | 17.2<br>8.61<br>4.32<br>2.17<br>1.10<br>0.56 | ms   |

<sup>(4)</sup> Maximum values must be used to determine waiting times in I2C communication

**PERFORMANCE SPECIFICATIONS (CONTINUED)****PRESSURE OUTPUT CHARACTERISTICS ( $V_{DD} = 3\text{ V}$ ,  $T = 25^\circ\text{C}$  UNLESS OTHERWISE NOTED)**

| Parameter                                        | Conditions                                                |                     | Min. | Typ.    | Max  | Unit    |
|--------------------------------------------------|-----------------------------------------------------------|---------------------|------|---------|------|---------|
| Operating Pressure Range                         | $P_{\text{range}}$                                        |                     | 300  |         | 1200 | mbar    |
| Extended Pressure Range                          | $P_{\text{ext}}$                                          | Linear Range of ADC | 10   |         | 2000 | mbar    |
| Relative Accuracy <sup>(1) (4)</sup>             | 600...1000 mbar, at $20^\circ\text{C}$                    |                     | -0.5 |         | +0.5 | mbar    |
|                                                  | 300...1100 mbar, $0...60^\circ\text{C}$                   |                     | -2   |         | +2   |         |
|                                                  | 300...1100 mbar, $-20...85^\circ\text{C}$                 |                     | -4   |         | +4   |         |
| Resolution RMS                                   | OSR                                                       | 8192                |      | 0.016   |      | mbar    |
|                                                  |                                                           | 4096                |      | 0.021   |      |         |
|                                                  |                                                           | 2048                |      | 0.028   |      |         |
|                                                  |                                                           | 1024                |      | 0.039   |      |         |
|                                                  |                                                           | 512                 |      | 0.062   |      |         |
|                                                  |                                                           | 256                 |      | 0.11    |      |         |
| Maximum error with supply voltage <sup>(2)</sup> | $V_{DD} = 1.5\text{ V}...3.6\text{ V}$                    |                     |      | $\pm 2$ |      | mbar    |
| Long-term stability                              |                                                           |                     |      | $\pm 2$ |      | mbar/yr |
| Reflow soldering impact                          | IPC/JEDEC J-STD-020C<br>(Refer to application note AN808) |                     |      | $\pm 4$ |      | mbar    |
| Recovering time after reflow <sup>(3)</sup>      |                                                           |                     |      | 7       |      | days    |

<sup>(1)</sup> With autozero at one pressure point<sup>(2)</sup> With autozero at 3V point<sup>(3)</sup> Time to recover at least 66% of reflow impact<sup>(4)</sup> Wet/dry cycle: sensor must be dried typically once a day**TEMPERATURE OUTPUT CHARACTERISTICS ( $V_{DD} = 3\text{ V}$ ,  $T = 25^\circ\text{C}$  UNLESS OTHERWISE NOTED)**

| Parameter                         | Conditions                                 |      | Min. | Typ.      | Max | Unit             |
|-----------------------------------|--------------------------------------------|------|------|-----------|-----|------------------|
| Relative Accuracy                 | $0...60^\circ\text{C}$ , 600...1100 mbar   |      |      | $\pm 1$   |     | $^\circ\text{C}$ |
|                                   | $-20...85^\circ\text{C}$ , 300...1100 mbar |      | -2   |           | +2  | $^\circ\text{C}$ |
| Maximum error with supply voltage | $V_{DD} = 1.5\text{ V}...3.6\text{ V}$     |      |      | $\pm 0.3$ |     | $^\circ\text{C}$ |
| Resolution RMS                    | OSR                                        | 8192 |      | 0.002     |     | $^\circ\text{C}$ |
|                                   |                                            | 4096 |      | 0.003     |     |                  |
|                                   |                                            | 2048 |      | 0.004     |     |                  |
|                                   |                                            | 1024 |      | 0.006     |     |                  |
|                                   |                                            | 512  |      | 0.009     |     |                  |
|                                   |                                            | 256  |      | 0.012     |     |                  |

**MS5840-02BA**




Low profile, gel-filled, ultra-compact watertight pressure sensor, with stainless steel cap





**DIGITAL INPUTS (SDA, SCL)**

| Parameter             | Symbol            | Conditions | Min.                | Typ. | Max                  | Unit |
|-----------------------|-------------------|------------|---------------------|------|----------------------|------|
| Serial data clock     | SCL               |            |                     |      | 400                  | kHz  |
| Input high voltage    | V <sub>IH</sub>   |            | 80% V <sub>DD</sub> |      | 100% V <sub>DD</sub> | V    |
| Input low voltage     | V <sub>IL</sub>   |            | 0% V <sub>DD</sub>  |      | 20% V <sub>DD</sub>  | V    |
| Input leakage current | I <sub>leak</sub> | T = 25 °C  |                     |      | 0.1                  | μA   |

**DIGITAL OUTPUTS (SDA)**

| Parameter           | Symbol          | Conditions                 | Min.                | Typ. | Max                  | Unit |
|---------------------|-----------------|----------------------------|---------------------|------|----------------------|------|
| Output high voltage | V <sub>OH</sub> | I <sub>source</sub> = 1 mA | 80% V <sub>DD</sub> |      | 100% V <sub>DD</sub> | V    |
| Output low voltage  | V <sub>OL</sub> | I <sub>sink</sub> = 1 mA   | 0% V <sub>DD</sub>  |      | 20% V <sub>DD</sub>  | V    |

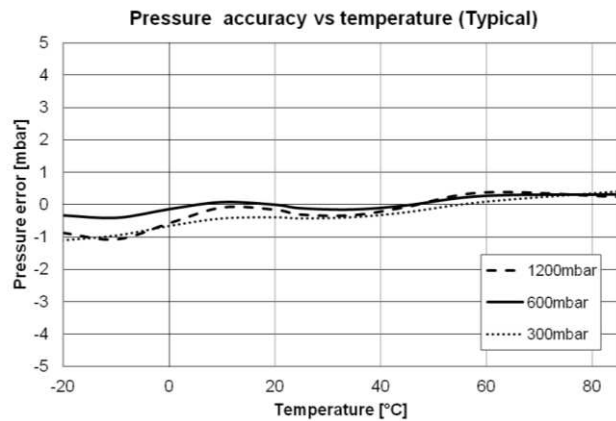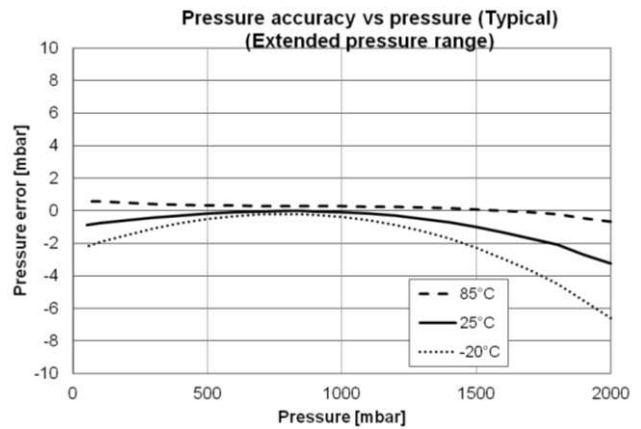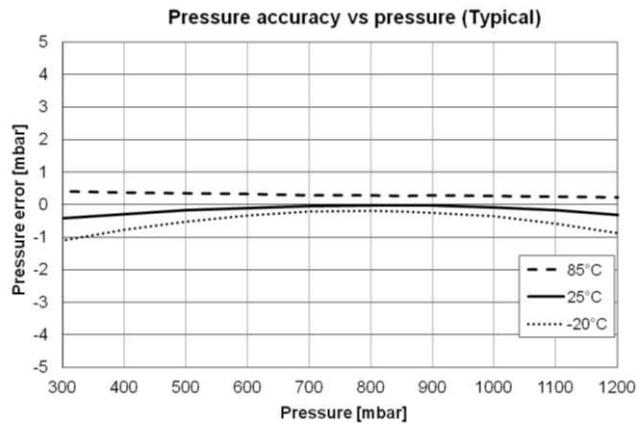**TYPICAL PERFORMANCE CHARACTERISTICS****RELATIVE PRESSURE ERROR AND TEMPERATURE ERROR VS PRESSURE AND TEMPERATURE  
(TYPICAL VALUES)**

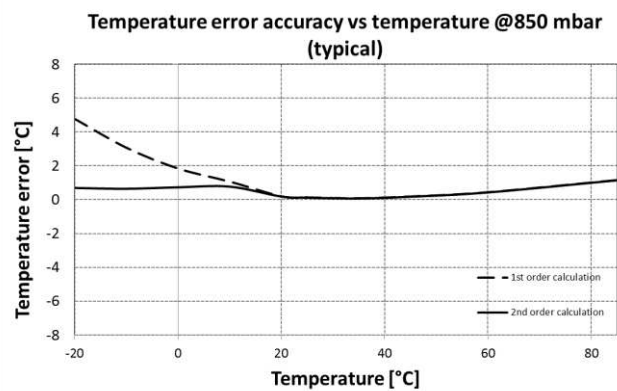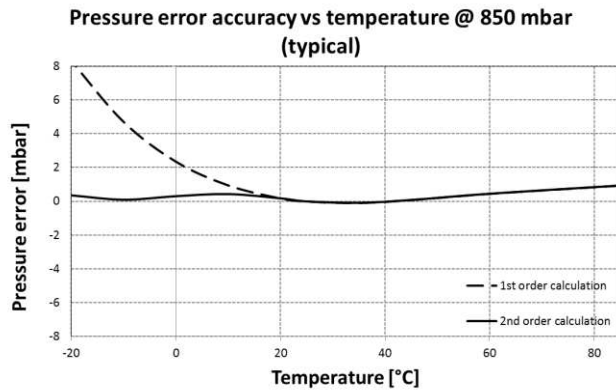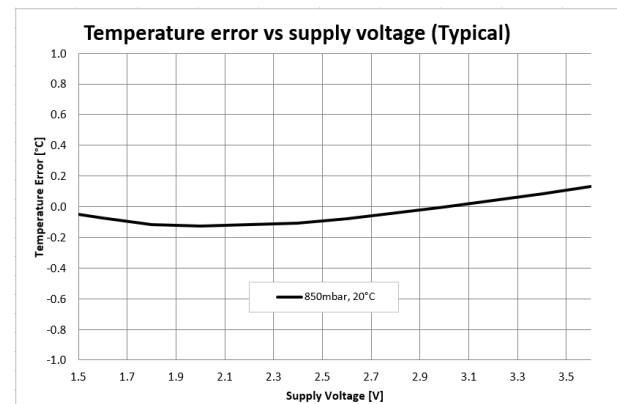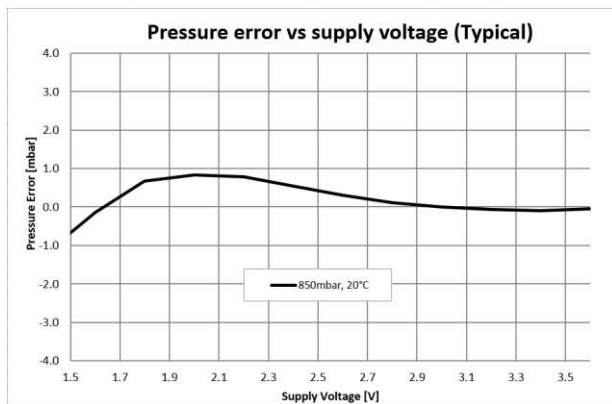**TYPICAL PERFORMANCE CHARACTERISTICS****RELATIVE PRESSURE AND TEMPERATURE ERROR VS TEMPERATURE****(1<sup>ST</sup> ORDER AND 2<sup>ND</sup> ORDER ALGORITHM, TYPICAL VALUES)****RELATIVE PRESSURE AND TEMPERATURE ERROR VS POWER SUPPLY****(TYPICAL VALUES)**

## PRESSURE AND TEMPERATURE CALCULATION

### GENERAL

The MS5840 consists of a piezo-resistive sensor and a sensor interface integrated circuit. The main function of the MS5840 is to convert the uncompensated analog output voltage from the piezo-resistive pressure sensor to a 24-bit digital value, as well as providing a 24-bit digital value for the temperature of the sensor.

### FACTORY CALIBRATION

Every module is individually factory calibrated at two temperatures and two pressures. As a result, 8 coefficients necessary to compensate for process and temperature variations are calculated and stored in the 112 bits PROM of each module. These bits (stored in 16 bits word from W0 to W6) must be read and used together with the D1 and D2 values to get the compensated pressure and temperature values.


The coefficient W0 contains also factory configuration bits and a CRC, as represented in " Figure 10 : Version number in Word 0" below.

### SERIAL I<sup>2</sup>C INTERFACE

The external microcontroller clocks in the data through the input SCL (Serial CLock) and SDA (Serial DAta). The sensor responds on the same pin SDA which is bidirectional for the I<sup>2</sup>C bus interface. This interface type uses only 2 signal lines and does not require a chip select.

| Module ref  | Mode             | Pins used | Address (7 bits) |
|-------------|------------------|-----------|------------------|
| MS5840-02BA | I <sup>2</sup> C | SDA, SCL  | 0x76 (1110110 b) |

## FIRST ORDER PRESSURE AND TEMPERATURE CALCULATION

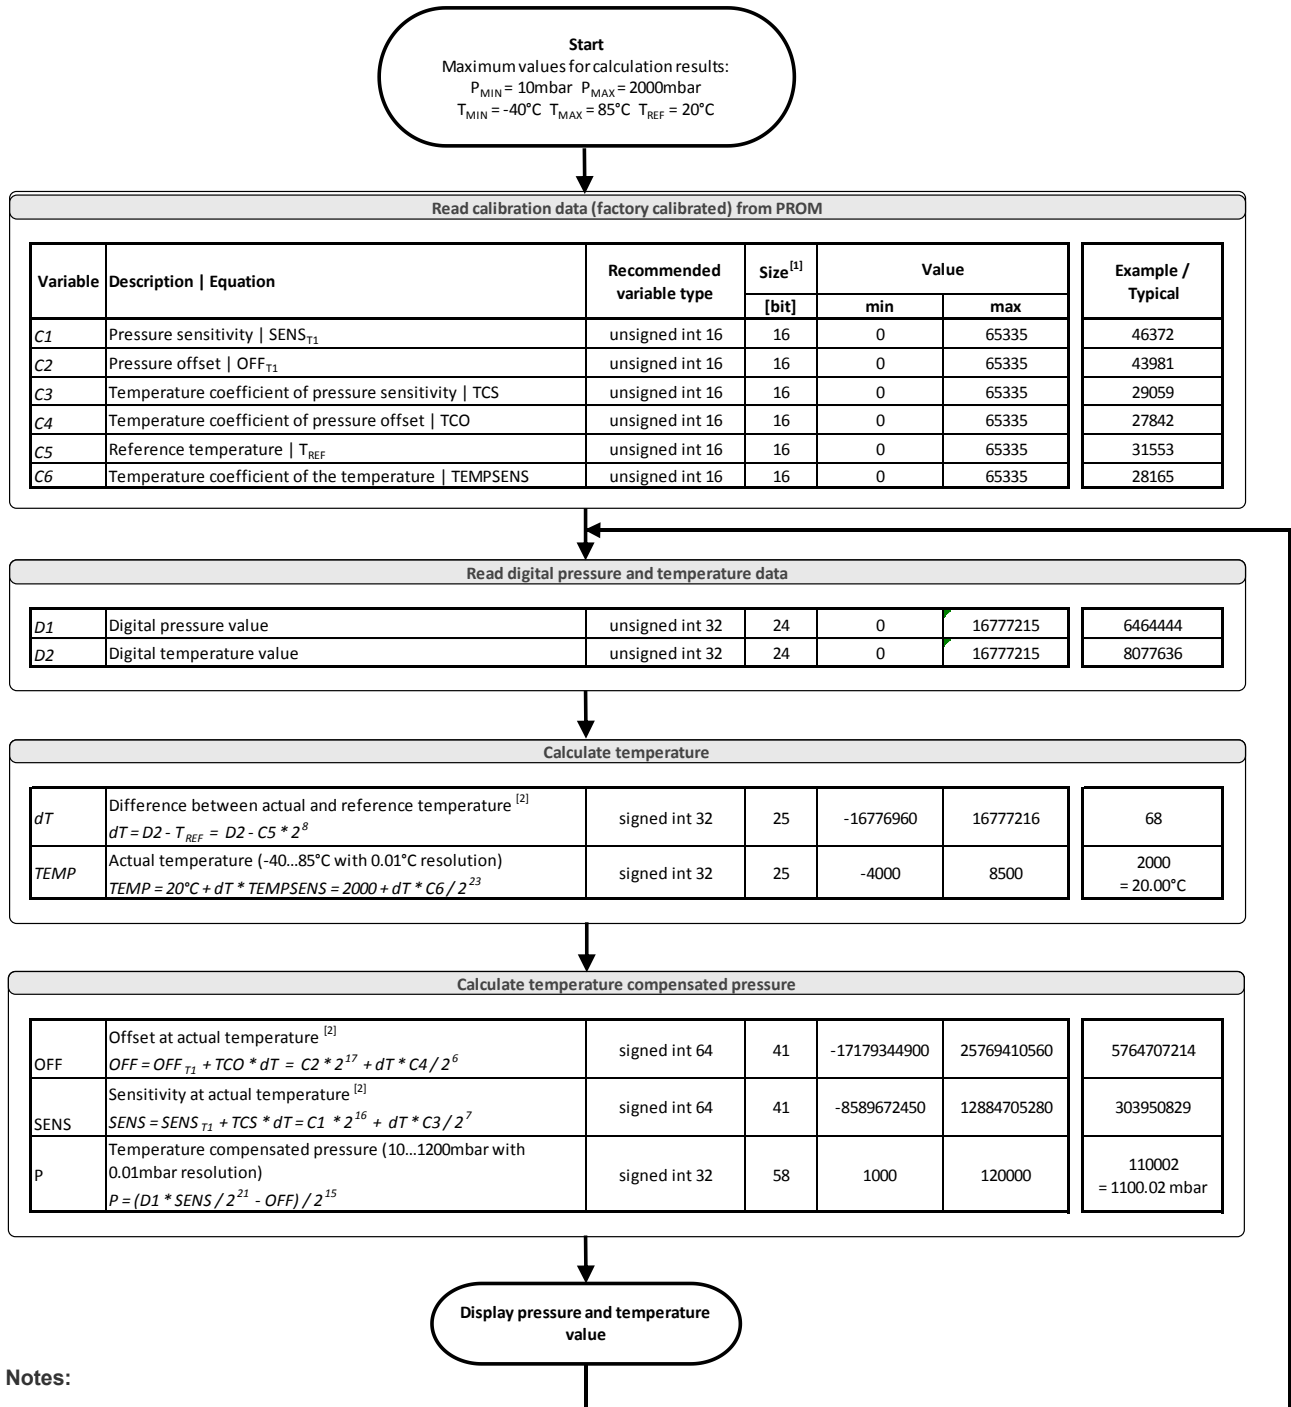**Notes:**

- [1] Maximal size of intermediate result during evaluation of variable
- [2] Min and max have to be defined

Figure 1 : Pressure and temperature first order

## SECOND ORDER TEMPERATURE COMPENSATION

The results of the first order calculation are used as described in the following chart to obtain the 2<sup>nd</sup> order pressure and temperature compensated values.

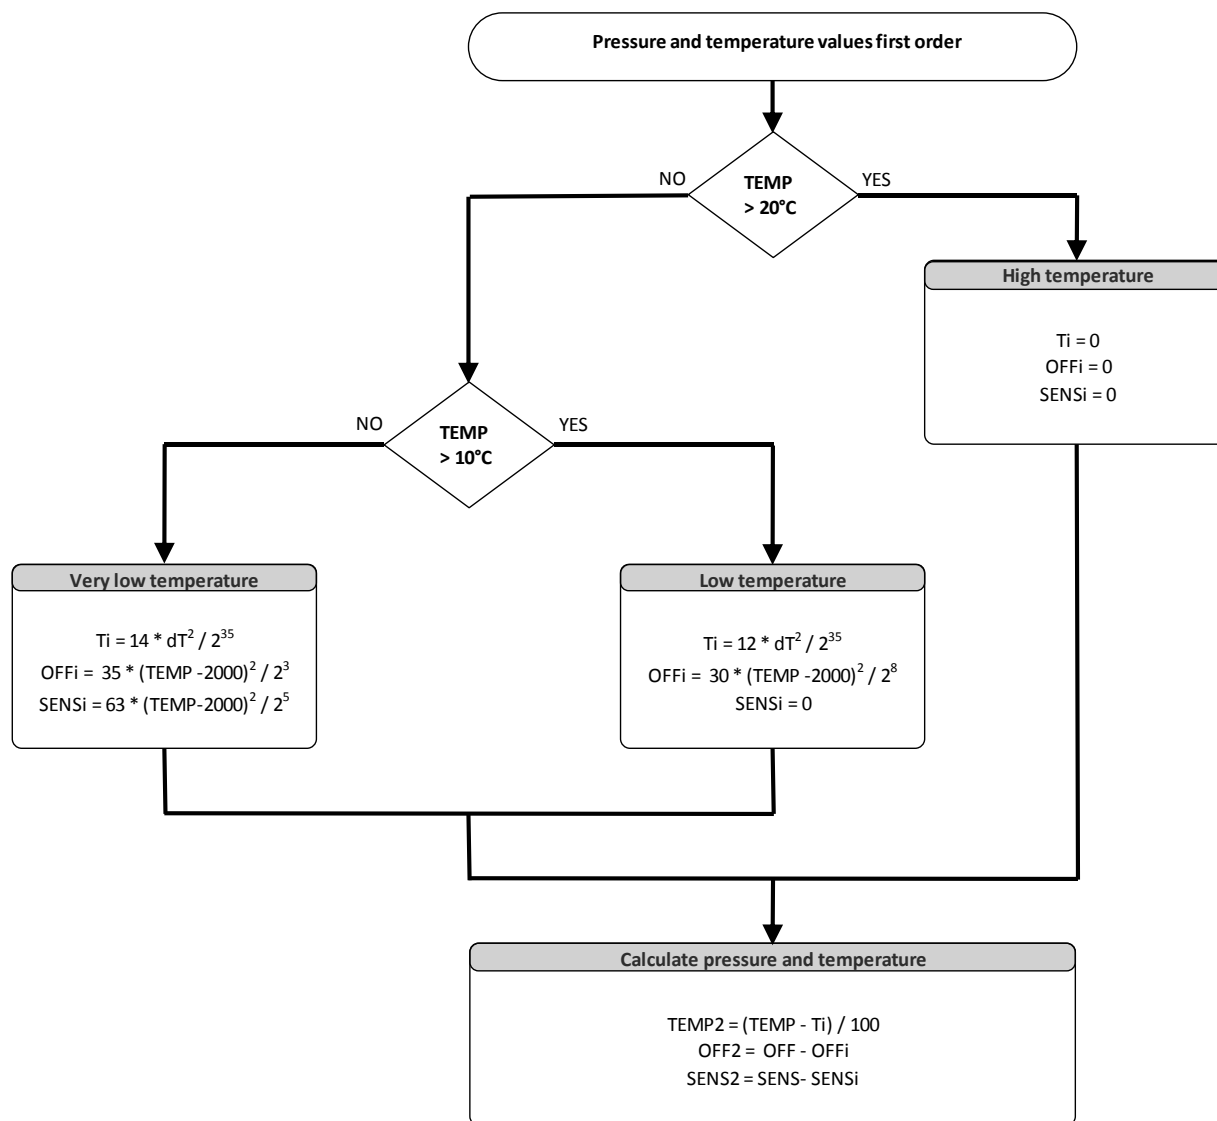


Figure 2 : Second order compensation flowchart

**I<sup>2</sup>C INTERFACE****COMMANDS**

The MS5840 has only five basic commands:

1. Reset
2. Read PROM (112 bit of calibration words)
3. D1 conversion
4. D2 conversion
5. Read ADC result (24-bit pressure / temperature)

Size of each command is 1 byte (8 bits) as described in the table "Figure 3 : Command structure" below.

After the PROM read command, sensor responds with 16 bits word. Bits A2, A1 and A0 select PROM addresses. Conversion is started after a "Convert D1" or "Convert D2" with the requested OSR is issued. Conversion time depends on the OSR as shown in the table specifications. Maximum waiting time values need to be used to ensure finished operation.

ADC read command will return 24 bits result of the above requested finished conversion.

|                       | Command byte |     |   |     |            |            |            |      | hex value       |
|-----------------------|--------------|-----|---|-----|------------|------------|------------|------|-----------------|
| Bit number            | 0            | 1   | 2 | 3   | 4          | 5          | 6          | 7    |                 |
| Bit name              | PR<br>M      | COV | - | Typ | A2/<br>Os2 | A1/<br>Os1 | A0/<br>Os0 | Stop |                 |
| Command               |              |     |   |     |            |            |            |      |                 |
| Reset                 | 0            | 0   | 0 | 1   | 1          | 1          | 1          | 0    | 0x1E            |
| Convert D1 (OSR=256)  | 0            | 1   | 0 | 0   | 0          | 0          | 0          | 0    | 0x40            |
| Convert D1 (OSR=512)  | 0            | 1   | 0 | 0   | 0          | 0          | 1          | 0    | 0x42            |
| Convert D1 (OSR=1024) | 0            | 1   | 0 | 0   | 0          | 1          | 0          | 0    | 0x44            |
| Convert D1 (OSR=2048) | 0            | 1   | 0 | 0   | 0          | 1          | 1          | 0    | 0x46            |
| Convert D1 (OSR=4096) | 0            | 1   | 0 | 0   | 1          | 0          | 0          | 0    | 0x48            |
| Convert D2 (OSR=256)  | 0            | 1   | 0 | 1   | 0          | 0          | 0          | 0    | 0x50            |
| Convert D2 (OSR=512)  | 0            | 1   | 0 | 1   | 0          | 0          | 1          | 0    | 0x52            |
| Convert D2 (OSR=1024) | 0            | 1   | 0 | 1   | 0          | 1          | 0          | 0    | 0x54            |
| Convert D2 (OSR=2048) | 0            | 1   | 0 | 1   | 0          | 1          | 1          | 0    | 0x56            |
| Convert D2 (OSR=4096) | 0            | 1   | 0 | 1   | 1          | 0          | 0          | 0    | 0x58            |
| ADC Read              | 0            | 0   | 0 | 0   | 0          | 0          | 0          | 0    | 0x00            |
| PROM Read             | 1            | 0   | 1 | 0   | A2         | A1         | A0         | 0    | 0xA0 to<br>0xAC |

Figure 3 : Command structure

## RESET SEQUENCE

At power on, an internal reset circuitry ensures calibration PROM data gets loaded into the internal register.

Reset sequence can be sent once to make sure this operation is successfully done. It can be also used to reset the device PROM from an unknown condition.

The reset can be sent at any time. In the event that there is no successful power on reset, maybe caused by the SDA being blocked by the module in the acknowledge state, the only way to get the MS5840 back to function, is to send several SCLs until SDA release, followed by a reset sequence, or to perform a power OFF-ON cycle.

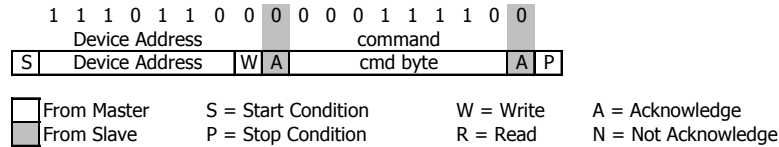


Figure 4 : I<sup>2</sup>C Reset Command

## PROM READ SEQUENCE

The read command for PROM must be executed once after reset by the user software to read the content of the calibration PROM and extract / store the calibration coefficients. There are 7 addresses resulting in a total memory content of 112 bits. Memory words contain: factory data, calibration coefficients and CRC. Command sequence is 8 bits wide and slave responses will send back 16 bits result which is clocked with the MSB first.

The PROM read command is divided in two parts. Firstly, ASIC is set into PROM read mode and address of the requested word is issued. Then, content of addressed memory word is read.

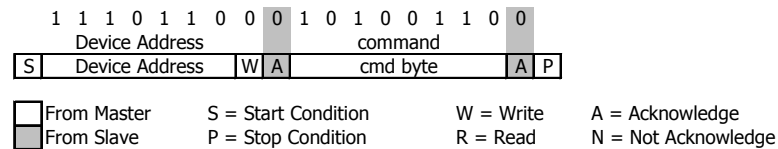


Figure 5 : I<sup>2</sup>C Command to read memory address= 011

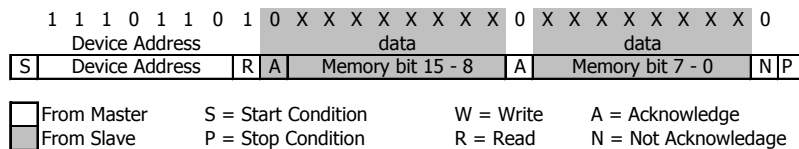


Figure 6 : I<sup>2</sup>C answer from MS5840

## CONVERSION SEQUENCE

The conversion command is used to initiate uncompensated pressure (D1) or uncompensated temperature (D2) conversion. Once finished, raw values are read using "ADC read command". Result is clocked out with MSB first. If conversion is not finished before sending the "ADC read command", or the "ADC read command" is repeated, conversion will not stop but issued result will be wrong. Conversion sequence command sent during the already started conversion process will yield incorrect result as well.

Once command issued, the ADC will start converting the values from the sensing element into digital 24-bit format. Conversion time is dependent from selected OSR (page 2). After the conversion is performed, the data can be accessed by sending a read command as shown below.

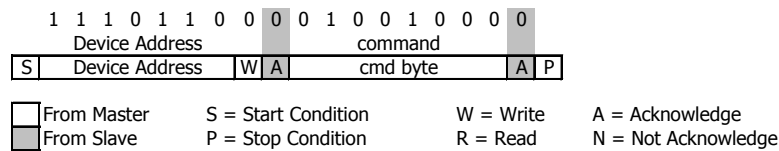


Figure 7 : I<sup>2</sup>C command to initiate a pressure conversion (OSR=4096, typ=D1)

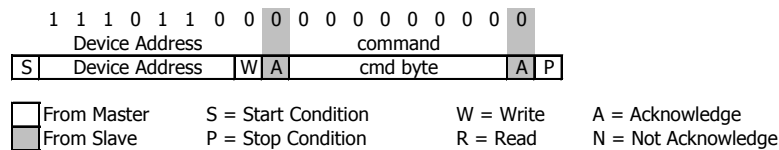


Figure 8 : I<sup>2</sup>C ADC read sequence

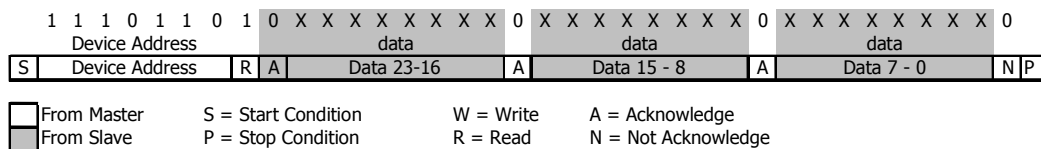


Figure 9 : I<sup>2</sup>C answer from MS5840

## VERSION IDENTIFICATION NUMBER (WORD 0)

Depending on product version, bits [11:5] of memory address 0 are programmed with the following fixed values:

### MS5840-02BA01

| Address | 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4                          | 3 | 2 | 1 | 0 |
|---------|-----|----|----|----|----|----|---|---|---|---|---|----------------------------|---|---|---|---|
| 0       | crc |    |    |    | 0  | 0  | 0 | 0 | 0 | 0 | 0 | factory configuration bits |   |   |   |   |

### MS5840-02BA36

| Address | 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4                          | 3 | 2 | 1 | 0 |
|---------|-----|----|----|----|----|----|---|---|---|---|---|----------------------------|---|---|---|---|
| 0       | crc |    |    |    | 0  | 1  | 0 | 0 | 1 | 0 | 0 | factory configuration bits |   |   |   |   |

Figure 10 : Version number in Word 0

## CYCLIC REDUNDANCY CHECK (CRC)

A 4-bits CRC has been implemented to check the data validity in memory. The CRC read in the first four bits of W0 must be equal to the CRC calculated (see algorithm below) with all other PROM bits to ensure memory content integrity.

|   |                  |                  |                  |                  |                  |                  |             |             |             |             |             |             |                            |             |             |             |
|---|------------------|------------------|------------------|------------------|------------------|------------------|-------------|-------------|-------------|-------------|-------------|-------------|----------------------------|-------------|-------------|-------------|
|   | D<br>B<br>1<br>5 | D<br>B<br>1<br>4 | D<br>B<br>1<br>3 | D<br>B<br>1<br>2 | D<br>B<br>1<br>1 | D<br>B<br>1<br>0 | D<br>B<br>9 | D<br>B<br>8 | D<br>B<br>7 | D<br>B<br>6 | D<br>B<br>5 | D<br>B<br>4 | D<br>B<br>3                | D<br>B<br>2 | D<br>B<br>1 | D<br>B<br>0 |
| 0 | CRC              |                  |                  |                  | Version number   |                  |             |             |             |             |             |             | Factory configuration bits |             |             |             |
| 1 | C1               |                  |                  |                  |                  |                  |             |             |             |             |             |             |                            |             |             |             |
| 2 | C2               |                  |                  |                  |                  |                  |             |             |             |             |             |             |                            |             |             |             |
| 3 | C3               |                  |                  |                  |                  |                  |             |             |             |             |             |             |                            |             |             |             |
| 4 | C4               |                  |                  |                  |                  |                  |             |             |             |             |             |             |                            |             |             |             |
| 5 | C5               |                  |                  |                  |                  |                  |             |             |             |             |             |             |                            |             |             |             |
| 6 | C6               |                  |                  |                  |                  |                  |             |             |             |             |             |             |                            |             |             |             |

Figure 11 : Memory PROM mapping

## C CODE EXAMPLE FOR CRC-4 CALCULATION:

```

unsigned char crc4(unsigned int n_prom[])           // n_prom defined as 8x unsigned int (n_prom[8])
{
    int cnt;                                       // simple counter
    unsigned int n_rem=0;                         // crc remainder
    unsigned char n_bit;

    n_prom[0]=((n_prom[0]) & 0xFFFF);           // CRC byte is replaced by 0
    n_prom[7]=0;                                  // Subsidiary value, set to 0
    for (cnt = 0; cnt < 16; cnt++)                // operation is performed on bytes
    {                                              // choose LSB or MSB
        if (cnt%2==1)    n_rem ^= (unsigned short) ((n_prom[cnt]>>1]) & 0x00FF);
        else             n_rem ^= (unsigned short) (n_prom[cnt]>>1]>>8);
        for (n_bit = 8; n_bit > 0; n_bit--)
        {
            if (n_rem & (0x8000))    n_rem = (n_rem << 1) ^ 0x3000;
            else                     n_rem = (n_rem << 1);
        }
    }
    n_rem= ((n_rem >> 12) & 0x000F);             // final 4-bit remainder is CRC code
    return (n_rem ^ 0x00);
}

```

## MS5840-02BA

Low profile, gel-filled, ultra-compact watertight pressure sensor, with stainless steel cap

### APPLICATION CIRCUIT

MS5840 is a sensor that can be used in conjunction with a microcontroller in mobile altimeter applications. A typical application circuit is presented in "Figure 12 : Typical application circuit"


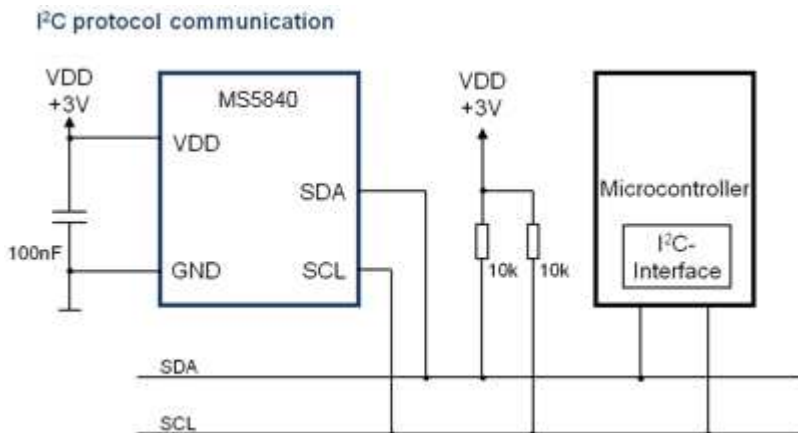


Figure 12 : Typical application circuit

### PIN CONFIGURATION AND DEVICE PACKAGE OUTLINE.

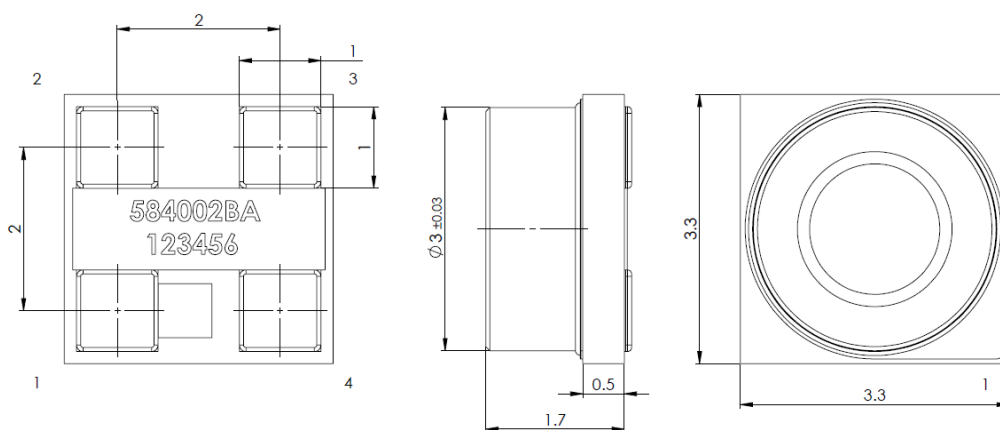


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. GENERAL TOLERANCE  $\pm 0.15\text{mm}$

|   |     |                        |
|---|-----|------------------------|
| 1 | GND | GROUND                 |
| 2 | VDD | POSITIVE SUPPLY        |
| 3 | SCL | I <sup>2</sup> C CLOCK |
| 4 | SDA | I <sup>2</sup> C DATA  |

Figure 13 : Package outlines and pin configuration

Low profile, gel-filled, ultra-compact watertight pressure sensor, with stainless steel cap

Pad layout for bottom side of the MS5840 soldered onto printed circuit board.



**SECTION A-A**

0.3 ± 0.05

B<sub>o</sub>

K<sub>o</sub>

**TYPICAL R0.3**

8 ± 0.1

4 ± 0.1

2 ± 0.05 (SEE NOTE 1)

(SEE NOTE 2)

A

A

A<sub>o</sub>

Φ 1.5 ± 0.1

Φ 1.5 MIN

17.5 ± 0.1

5.5 ± 0.05 (SEE NOTE 3)

12 ± 0.1

**MODULE ORIENTATION**

1 4

2 3

|                |            |
|----------------|------------|
| A <sub>o</sub> | 3.6 ± 0.1  |
| B <sub>o</sub> | 3.6 ± 0.1  |
| K <sub>o</sub> | 2.75 ± 0.1 |

Figure 15 : Tape dimensions

## MOUNTING AND ASSEMBLY CONSIDERATIONS

### SOLDERING

Please refer to the application note AN808 available on our website for soldering recommendations.

### MOUNTING

The MS5840 can be processed with automatic Pick & Place equipment using vacuum nozzles. It will not be damaged by the vacuum.

Due to the low stress assembly, the sensor does not show pressure hysteresis effects. It is important to solder all contact pads. Gel must stay free of external physical contact when manipulation.

### CONNECTION TO PCB

The package outline of the module allows the use of a flexible PCB. This is ideal for small-sized applications.

### SEALING

In applications such as outdoor watches the electronics must be protected against direct water or humidity. For such applications the MS5840 provides the possibility to seal with a gasket or an O-ring.

### CLEANING

The MS5840 has been manufactured under clean-room conditions. It is therefore recommended to assemble the sensor under class 10'000 or better conditions. Should this not be possible, it is recommended to protect the sensor opening during assembly from entering particles and dust. To avoid cleaning of the PCB, solder paste of type "no-clean" shall be used. Warning: cleaning might damage the sensor.

### ESD PRECAUTIONS

The electrical contact pads are protected against ESD up to 2 kV HBM (human body model). It is therefore essential to ground machines and personal properly during assembly and handling of the device. The MS5840 is shipped in antistatic transport boxes. Any test adapters or production transport boxes used during the assembly of the sensor shall be of an equivalent antistatic material.

### DECOUPLING CAPACITOR


Particular care must be taken when connecting the device to the power supply. A minimum of 100nF ceramic capacitor must be placed as close as possible to the MS5840 VDD pin. This capacitor will stabilize the power supply during data conversion and thus, provide the highest possible accuracy.

## MS5840-02BA

Low profile, gel-filled, ultra-compact watertight pressure sensor, with stainless steel cap

### ORDERING INFORMATION

| Description                       | Part Number |
|-----------------------------------|-------------|
| MS5840-02BA01 LP PRESS SENSOR T&R | 20000980-00 |
| MS5840-02BA36 LP PRESS SENSOR T&R | 20000982-00 |

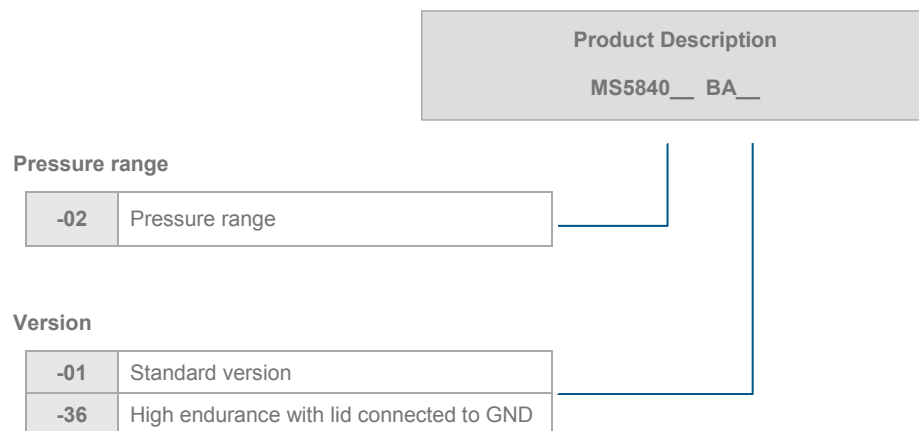

#### NORTH AMERICA

Tel +1 800 522 6752  
[customercare.frmr@te.com](mailto:customercare.frmr@te.com)

#### EUROPE

Tel +31 73 624 6999  
[customercare.bevx@te.com](mailto:customercare.bevx@te.com)

#### ASIA

Tel +86 0400 820 6015  
[customercare.shzn@te.com](mailto:customercare.shzn@te.com)

#### [te.com/sensorsolutions](http://te.com/sensorsolutions)

Measurement Specialties (MEAS), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.