

**Panasonic**

(((PaPIRs)))

PIR MOTION SENSORS 2019



**Special designs from Panasonic that provide high sensitivity and reliability**

## Pyroelectric infrared motion sensors from Panasonic for optimal usability and reliability

Panasonic develops and produces PIR motion sensors, which combine easy integration, high reliability and environment-friendly materials. The Panasonic PIR motion sensors abbreviated as PaPIRs, have different series of products, including:

### EKM PaPIRs: 3rd generation




**EKMB (WL)** digital output for battery-operated devices (1, 2, 6 $\mu$ A)  
**EKMC (VZ)** digital and analog output for battery-free devices (170 $\mu$ A)  
 Available lens colors: white, black and pearl white

### AMN NaPiOn: 2nd generation



**AMN3** digital output for battery-free devices (170 $\mu$ A)  
 Available lens colors: white and black

## Applications

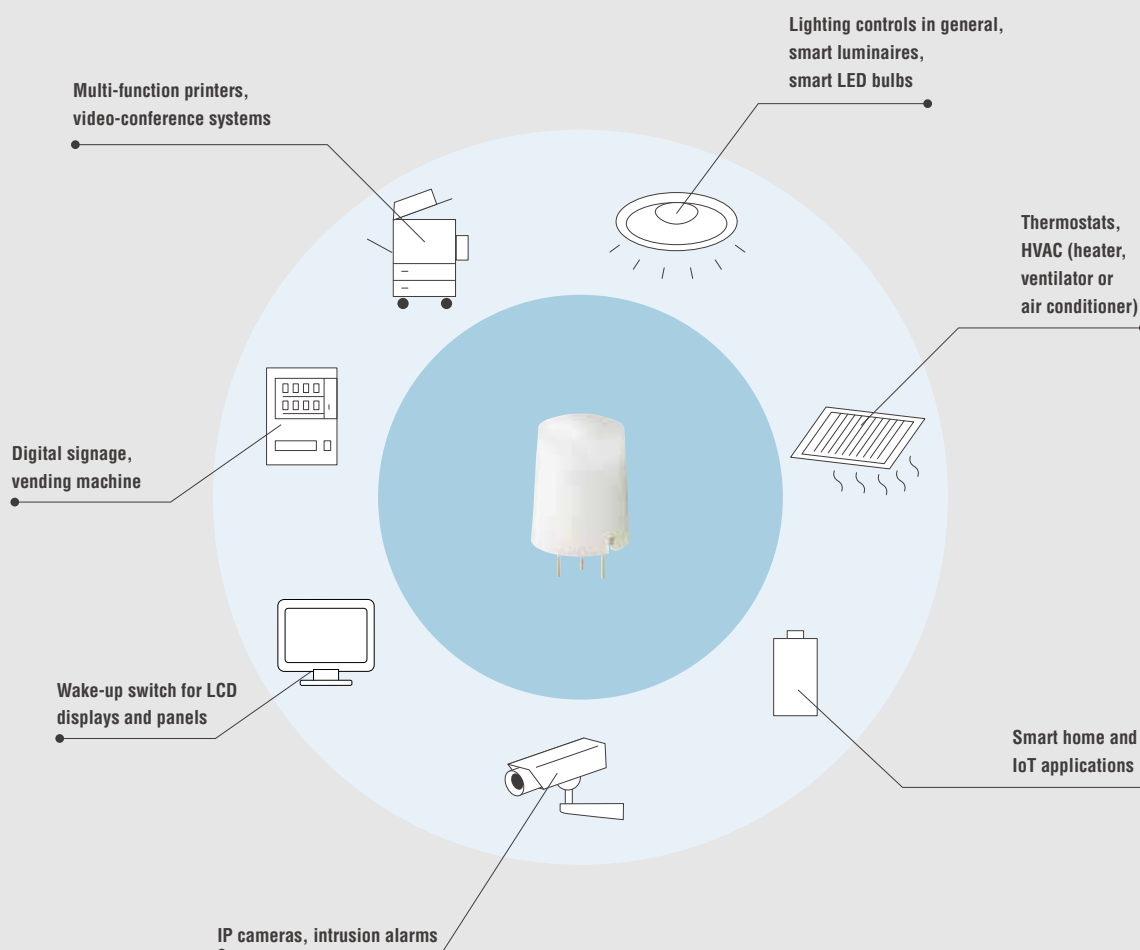

|                                                           |    |                                                |    |
|-----------------------------------------------------------|----|------------------------------------------------|----|
| Introduction .....                                        | 2  | AMN - Standard Detection Type .....            | 18 |
| PaPIRs design features .....                              | 4  | AMN - Slight Motion Detection Type .....       | 19 |
| Technical information for all sensors (EKM and AMN) ..... | 6  | AMN - Spot Detection Type .....                | 20 |
| EKM - Standard Detection Type .....                       | 7  | AMN - 10m Detection Type (long distance) ..... | 21 |
| EKM - Low Profile Type .....                              | 8  | AMN - Characteristics .....                    | 22 |
| EKM - Slight Motion Detection Type .....                  | 9  | Cautions for use .....                         | 23 |
| EKM - Standard and Slight Motion Detection Type .....     | 10 |                                                |    |
| EKM - High Density Long Distance Detection Type .....     | 11 |                                                |    |
| EKM - Horizontally Wide Detection Type .....              | 12 |                                                |    |
| EKM - Wall Installation Detection Type (corner) .....     | 13 |                                                |    |
| EKM - Long Distance Detection Type .....                  | 14 |                                                |    |
| EKM - Lensless Type .....                                 | 15 |                                                |    |
| EKM - Characteristics .....                               | 16 |                                                |    |

#### ■ Ordering information

**EKMB1**       **1**      

- PaPIRs motion sensor
- Current consumption in standby mode  
1: 1μA / 2: 2μA / 3: 6μA
- Detection (Lens)  
00: Lensless / 01: 5m distance standard / 03: 12m long distance /  
04: Wall installation type / 05: Horizontally wide type /  
06: High density long distance type / 07: Low profile type

- Others  
K: 6μA / Blank: Other than 6μA
- Lens color  
0: Lensless / 1: White /  
2: Black / 3: Pearl white
- Lens  
0: Lensless / 1: with lens

**EKMC**   **6**     **1**    

- PaPIRs motion sensor
- Sensor type  
1: Digital / 2: Analog
- Detection (Lens)  
00: Lensless / 01: 5m distance standard / 03: 12m long distance /  
04: Wall installation type / 05: Horizontally wide type /  
06: High density long distance type / 07: Low profile type

- Lens color  
0: Lensless / 1: White /  
2: Black / 3: Pearl white
- Lens  
0: Lensless / 1: with lens

**AMN 3**   **1 1**  



- NaPiOn sensor
- Lens color  
1: Black / 2: White
- Detection (Lens)  
1: Standard type / 2: Slight motion type /  
3: Spot type / 4: 10m type

## PaPIRs design features

The PIR motion sensors from Panasonic offer crucial advantages over conventional PIR motion sensors. The unique design concept (explained below) ranges from the production of the pyroelectric sensing devices to the internal signal processing, thus guaranteeing an optimal detection capability and high reliability.


### Easy design-in

The integrated amplifier/comparator circuit inside a TO-5 metal can (digital type) prevents interferences caused by electromagnetic fields, such as those generated by cell phones and wireless devices. A special differential circuit design is introduced for the **EKMB 6μA** type for applications where a high noise resistance is required (up to GHz range).

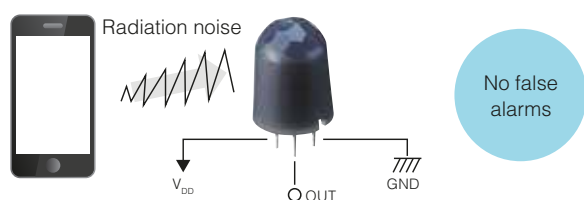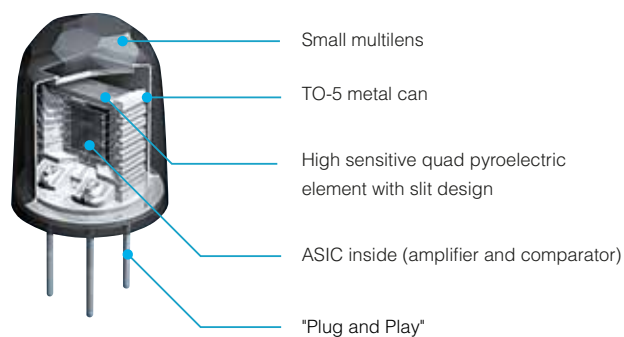


### Small and fancy lens design

Thanks to the special design of the small pyroelectric elements, it is possible to use a smaller lens size while keeping the same detection area and distance compared to conventional sensors.

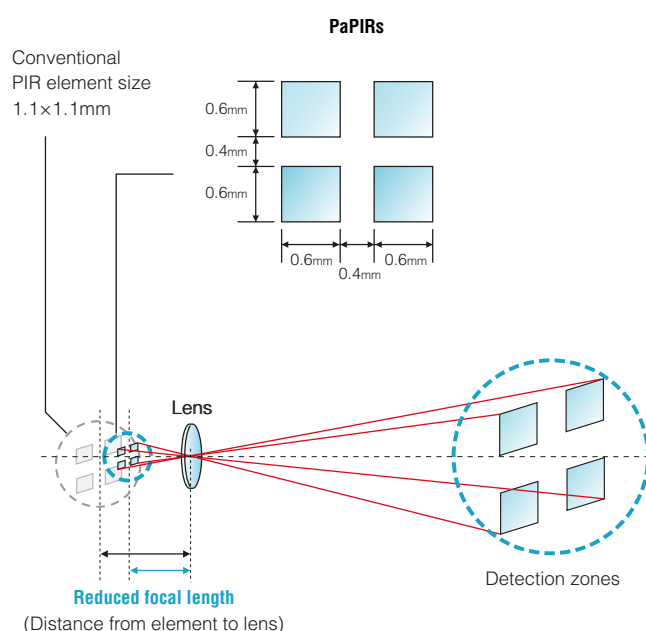


### Two times better sensitivity

The sensitivity has been significantly improved thanks to a unique slit design of the pyroelectric elements. The separated sensing areas prevent thermal crosstalk between the single sensing elements. Therefore, reliable detection is possible even if the temperature difference between the background (e.g. floor/wall) and the target object (human) is small. (e.g.  $\Delta T = 4^{\circ}\text{C}$ )



Temperature distribution of conventional pyroelectric sensors without slit design




Temperature distribution of Panasonic's pyroelectric infrared sensors with slit design


### Four times better signal-to-noise ratio

Improved signal-to-noise ratio thanks to a special I/V circuit which is used for converting a current signal from the pyroelectric element to voltage. Panasonic PIR motion sensors perform by the feedback capacitor and the operational amplifier, different from the conventional FET-type, thereby decreasing the probability of false alarms due to temperature fluctuation.

Conventional PIR (JFET)



PaPIRs (op amp)




### Lead-free pyroelectric element

A ferroelectric Lithiumtantalate ( $\text{LiTaO}_3$ ) single lead-free crystal is used as the pyroelectric element for Panasonic PIR motion sensors. Conventional PIR motion sensors normally use a ceramic base material (e.g. PZT) for the pyroelectric element, which contains lead in many cases.


### Low current consumption EKMB (WL)

Reduction of current consumption (1, 2 or  $6\mu\text{A}$ ) thanks to the special circuit design technology allows battery life to be extended for battery-driven products.

PaPIRs: High signal-to-noise ratio




Conventional types: Low signal-to-noise ratio

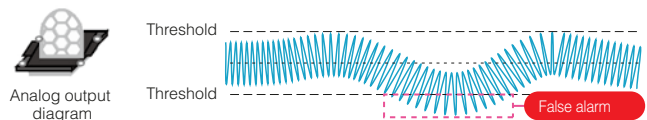


## Technical information for all sensors (EKM and AMN)

### Block diagram output circuit

Digital output with integrated amplifier and comparator


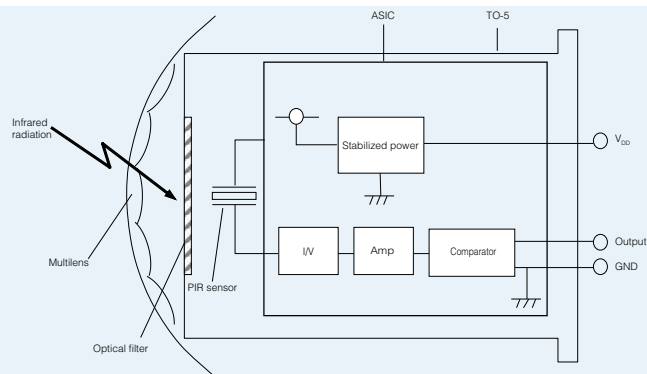


Analog output with integrated amplifier

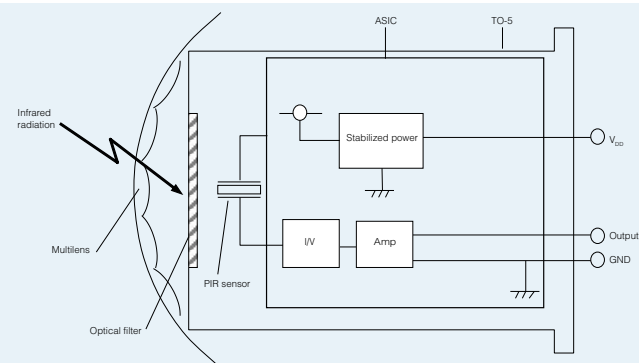


### Wiring diagram

Digital output

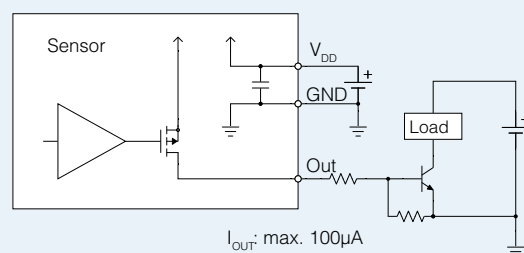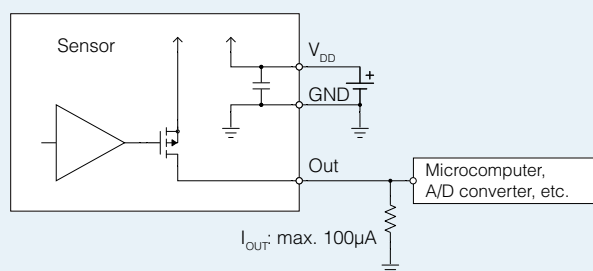

Analog output

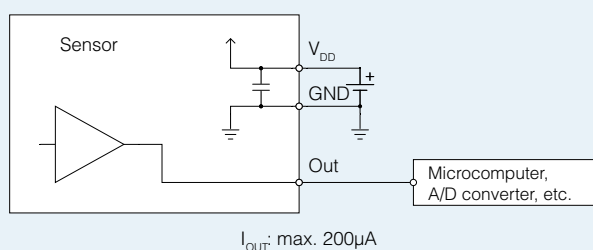

#### Notes: Digital output types:

The output signal for the digital output type is from inside FET drain, therefore pull-down resistors are necessary. Please select an output resistor (pull-down concept) in accordance with  $V_{OUT}$  so that the output current is maximum 100µA. If the output current is more than 100µA, this may cause false alarms.

If the microcomputer has a pull-down function, there is no need for a resistor as long as the output current does not exceed 100µA.

#### Analog output types (EKMC26 series):

In either case, a microcomputer or a resistor needs to be chosen in accordance with  $V_{OUT}$ , so that the output current is maximum 200µA.

## EKM - Standard Detection Type



PaPIRs: 3rd generation

Preference type

Flat lens for an unobtrusive integration

Lens diameter 9.5mm


|                                                                                                                                             |                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Specified detection distance (Note 1)</b>                                                                                                | up to 5m                                                                                                                                                                                 |
| <b>Typical ceiling installation height (Note 2)</b>                                                                                         | 3m                                                                                                                                                                                       |
| <b>Field of view</b>                                                                                                                        | 106° x 97°                                                                                                                                                                               |
| <b>Detection zones</b>                                                                                                                      | 64                                                                                                                                                                                       |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$<br>> Object speed: 1m/s<br>> Object size: 700 x 250mm<br>> Crossing 2 detection zones | <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |

## Typical applications


- › Lighting controls for offices and smart homes
- › Smart luminaires
- › Smart LED bulbs
- › Ventilation systems and air conditioners
- › IP cameras
- › Digital signage
- › Wake-up switch for displays

Further information on electrical characteristics please see page 16

## Dimension (in mm, inches in brackets)

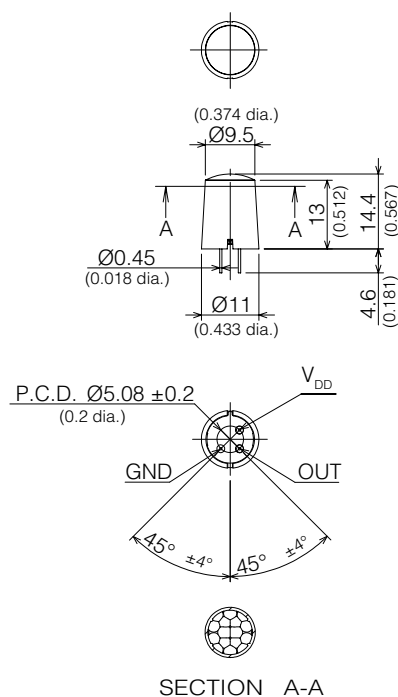

## Detection area

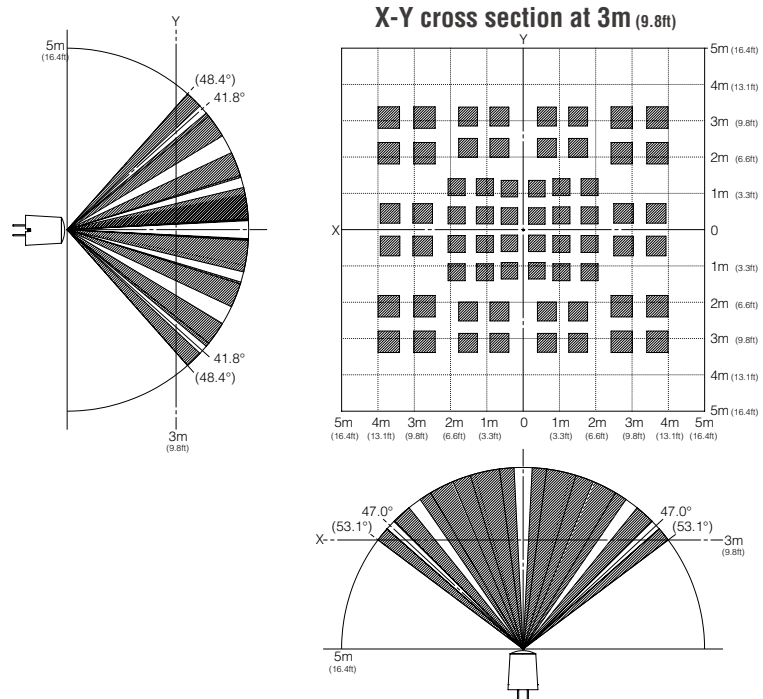

| Notes    | Standby current consumption | Output type              | Sensitivity | White                                                             | Black        | Pearl White  |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|--------------|--------------|
| High-end | 1μA                         | Digital (open collector) | Standard    | EKMB1101111                                                       | EKMB1101112  | EKMB1101113  |
|          | 2μA                         | Digital (open collector) | Standard    | EKMB1201111                                                       | EKMB1201112  | EKMB1201113  |
| Economy  | 6μA                         | Digital (open collector) | Standard    | EKMB1301111K                                                      | EKMB1301112K | EKMB1301113K |
|          | 170μA                       | Digital (open collector) | Standard    | EKMC1601111                                                       | EKMC1601112  | EKMC1601113  |
|          | 170μA                       | Analog (op amp)          | Adjustable  | EKMC2601111K                                                      | EKMC2601112K | EKMC2601113K |
| Special  | 6μA                         | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |              |              |
|          | 170μA                       | Digital (open collector) | High        |                                                                   |              |              |
|          | 170μA                       | Digital (open collector) | Low         |                                                                   |              |              |

Note: The specification shows the X-Y cross section at 2.5m.

Further information at [www3.panasonic.biz/ac/e/control/sensor/human/index.jsp](http://www3.panasonic.biz/ac/e/control/sensor/human/index.jsp)

## EKM - Low Profile Type



Lower height lens design  
[14.4mm→10.9mm]

Comparable performance to PaPIRs standard detection type lens

Fit with superior product design


|                                                                                                                                             |                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Specified detection distance (Note 1)</b>                                                                                                | up to 5m                                                                                                                                                                                 |
| <b>Typical ceiling installation height (Note 2)</b>                                                                                         | 3m                                                                                                                                                                                       |
| <b>Field of view</b>                                                                                                                        | 110° x 110°                                                                                                                                                                              |
| <b>Detection zones</b>                                                                                                                      | 32                                                                                                                                                                                       |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$<br>> Object speed: 1m/s<br>> Object size: 700 x 250mm<br>> Crossing 2 detection zones | <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |

### Typical applications


- › LED screen for TV, PC
- › Wake-up switch for displays
- › Digital signage
- › Lighting controls for offices and smart home
- › Smart luminaires
- › Ventilation systems and air conditioners
- › IP cameras

Further information on electrical characteristics please see page 16


### Dimension (in mm, inches in brackets)

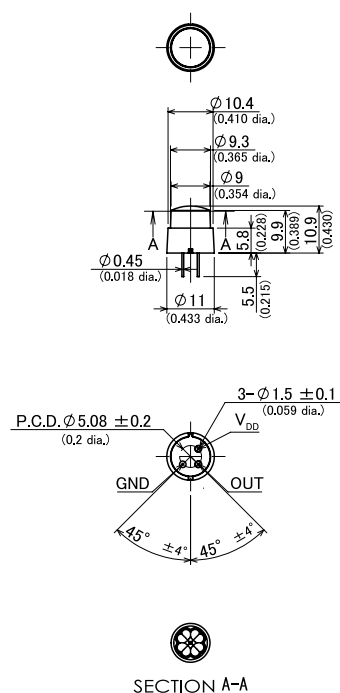

### Detection area

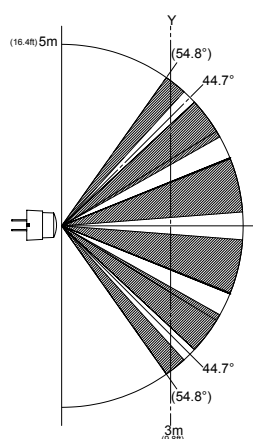

### X-Y cross section at 3m (9.8ft)

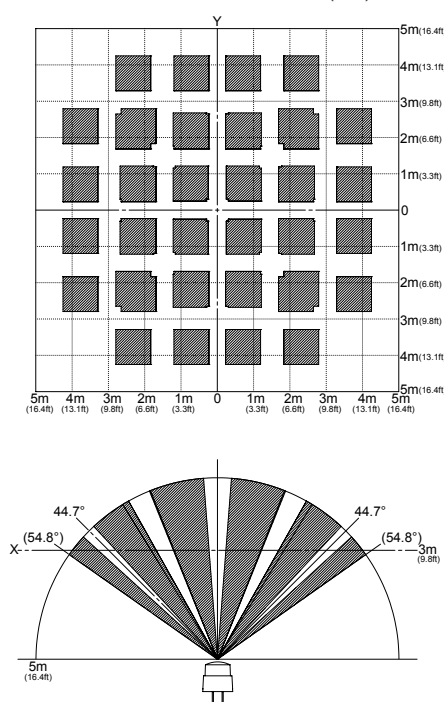

| Notes    | Standby current consumption | Output type              | Sensitivity | White                                                             | Black        | Pearl White  |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|--------------|--------------|
| High-end | 1μA                         | Digital (open collector) | Standard    | EKMB1107111                                                       | EKMB1107112  | EKMB1107113  |
|          | 2μA                         | Digital (open collector) | Standard    | EKMB1207111                                                       | EKMB1207112  | EKMB1207113  |
| Economy  | 6μA                         | Digital (open collector) | Standard    | EKMB1307111K                                                      | EKMB1307112K | EKMB1307113K |
|          | 170μA                       | Digital (open collector) | Standard    | EKMC1607111                                                       | EKMC1607112  | EKMC1607113  |
|          | 170μA                       | Analog (op amp)          | Adjustable  | EKMC2607111K                                                      | EKMC2607112K | EKMC2607113K |
| Special  | 6μA                         | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |              |              |
|          | 170μA                       | Digital (open collector) | High        |                                                                   |              |              |
|          | 170μA                       | Digital (open collector) | Low         |                                                                   |              |              |

Note: The specification shows the X-Y cross section at 2.5m.

Further information at [www3.panasonic.biz/ac/e/control/sensor/human/index.jsp](http://www3.panasonic.biz/ac/e/control/sensor/human/index.jsp)

## EKM - Slight Motion Detection Type



PaPIRs: 3rd generation

Optimized for small movements


Lens diameter 14.6mm

Almost the same mechanical dimensions like the Standard and Slight Motion Detection Type (lens diameter 0.3mm smaller)

|                                                                                                                                                                                          |                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>Specified detection distance (Note 1)</b>                                                                                                                                             | up to 2.5m - 4m |
| <b>Typical ceiling installation height (Note 2)</b>                                                                                                                                      | 3m              |
| <b>Field of view</b>                                                                                                                                                                     | 104° x 104°     |
| <b>Detection zones</b>                                                                                                                                                                   | 112             |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$<br>> Object speed: 0.5m/s<br>> Object size: 200 x 200mm<br>> Crossing 1 detection zone                                             |                 |
| <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |                 |


Further information on electrical characteristics please see page 16

## Dimension (in mm, inches in brackets)

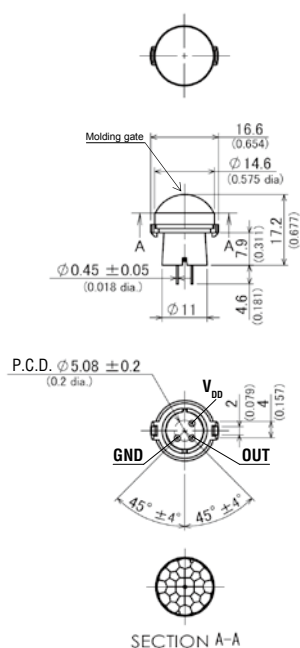

## Detection area

## X-Y cross section at 3m (9.8ft)

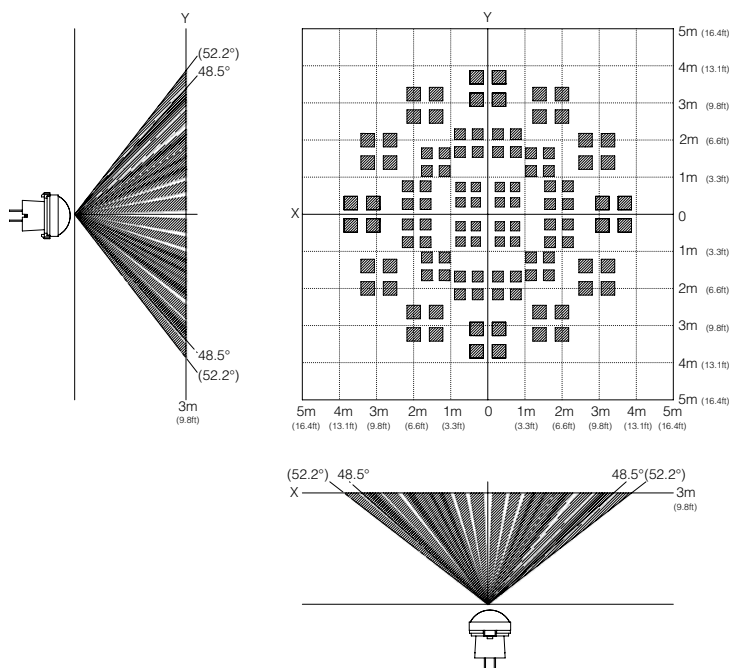

| Notes    | Standby current consumption | Output type              | Sensitivity | White                                                             | Black        | Pearl White  |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|--------------|--------------|
| High-end | 1 $\mu$ A                   | Digital (open collector) | Standard    | EKMB1191111                                                       | EKMB1191112  | EKMB1191113  |
|          | 2 $\mu$ A                   | Digital (open collector) | Standard    | EKMB1291111                                                       | EKMB1291112  | EKMB1291113  |
| Economy  | 6 $\mu$ A                   | Digital (open collector) | Standard    | EKMB1391111K                                                      | EKMB1391112K | EKMB1391113K |
|          | 170 $\mu$ A                 | Digital (open collector) | Standard    | EKMC1691111                                                       | EKMC1691112  | EKMC1691113  |
|          | 170 $\mu$ A                 | Analog (op amp)          | Adjustable  | EKMC2691111K                                                      | EKMC2691112K | EKMC2691113K |
| Special  | 6 $\mu$ A                   | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |              |              |
|          | 170 $\mu$ A                 | Digital (open collector) | High        |                                                                   |              |              |
|          | 170 $\mu$ A                 | Digital (open collector) | Low         |                                                                   |              |              |

Note: The specification shows the X-Y cross section at 2.5m.

Further information at [www3.panasonic.biz/ac/e/control/sensor/human/index.jsp](http://www3.panasonic.biz/ac/e/control/sensor/human/index.jsp)

## EKM - Standard and Slight Motion Detection Type



PaPIRs: 3rd generation

The rectangular center zone is optimized detecting smallest movements.


Lens diameter 14.9mm

Almost the same mechanical dimensions like the Slight Motion Detection Type (lens diameter 0.3mm bigger)

|                                                                                                                                                                                                                                                                                                                                                                        |                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| <b>Specified detection distance (Note 1)</b>                                                                                                                                                                                                                                                                                                                           | up to 2.2m - 3.1m |
| <b>Typical ceiling installation height (Note 2)</b>                                                                                                                                                                                                                                                                                                                    | 3m                |
| <b>Field of view slight motion area</b>                                                                                                                                                                                                                                                                                                                                | 44° x 44°         |
| <b>Field of view standard motion area</b>                                                                                                                                                                                                                                                                                                                              | 91° x 91°         |
| <b>Detection zones slight motion area</b>                                                                                                                                                                                                                                                                                                                              | 36                |
| <b>Detection zones standard motion area</b>                                                                                                                                                                                                                                                                                                                            | 48                |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$<br>> Object speed: 0.5m/s (slight motion area)<br>> Object speed: 1m/s (standard motion area)<br>> Object size: 200 x 200mm (slight motion area)<br>> Object size: 400 x 200mm (standard motion area)<br>> Crossing 1 detection zone (slight motion area)<br>> Crossing 2 detection zones (standard motion area) |                   |
| <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended                                                                                                                                                                               |                   |


Further information on electrical characteristics please see page 16

### Dimension (in mm, inches in brackets)

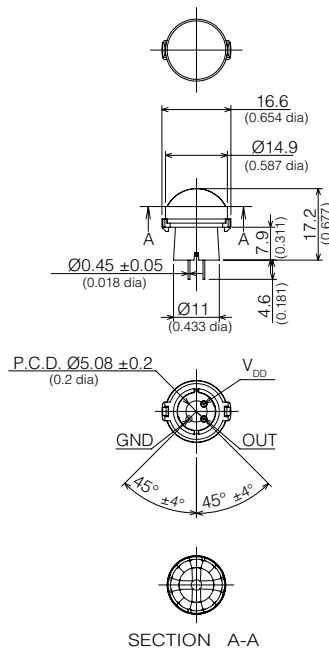

### Detection area

#### X-Y cross section at 3m (9.8ft)

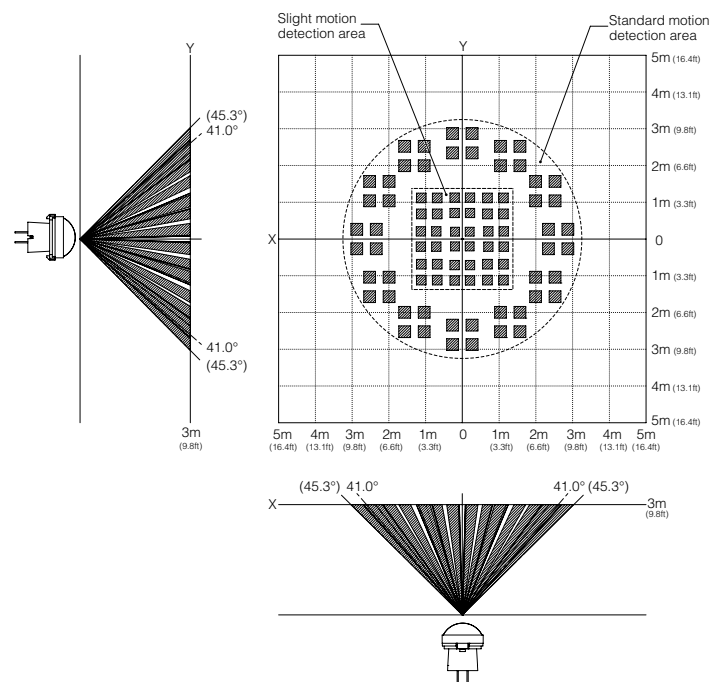

| Notes    | Standby current consumption | Output type              | Sensitivity | White                                                             | Black        | Pearl White  |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|--------------|--------------|
| High-end | 1μA                         | Digital (open collector) | Standard    | EKMB1193111                                                       | EKMB1193112  | EKMB1193113  |
|          | 2μA                         | Digital (open collector) | Standard    | EKMB1293111                                                       | EKMB1293112  | EKMB1293113  |
| Economy  | 6μA                         | Digital (open collector) | Standard    | EKMB1393111K                                                      | EKMB1393112K | EKMB1393113K |
|          | 170μA                       | Digital (open collector) | Standard    | EKMC1693111                                                       | EKMC1693112  | EKMC1693113  |
|          | 170μA                       | Analog (op amp)          | Adjustable  | EKMC2693111K                                                      | EKMC2693112K | EKMC2693113K |
| Special  | 6μA                         | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |              |              |
|          | 170μA                       | Digital (open collector) | High        |                                                                   |              |              |
|          | 170μA                       | Digital (open collector) | Low         |                                                                   |              |              |

Note: The specification shows the X-Y cross section at 2.2m.

Further information at [www3.panasonic.biz/ac/e/control/sensor/human/index.jsp](http://www3.panasonic.biz/ac/e/control/sensor/human/index.jsp)

## EKM - High Density Long Distance Detection Type



PaPIRs: 3rd generation

Smallest long range sensor

Maximum installation height of 17m (high sensitivity type)

Lens diameter 19.3mm

Additional lip (20.45mm) ready for an o-ring

Maximum  
installation  
height of  
17m


|                                                                                                                                             |                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Specified detection distance (Note 1)</b>                                                                                                | up to 12m - 14.5m                                                                                                                                                                        |
| <b>Typical ceiling installation height (Note 2)</b>                                                                                         | 12m                                                                                                                                                                                      |
| <b>Field of view</b>                                                                                                                        | 69° x 69°                                                                                                                                                                                |
| <b>Detection zones</b>                                                                                                                      | 128                                                                                                                                                                                      |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$<br>> Object speed: 1m/s<br>> Object size: 700 x 250mm<br>> Crossing 2 detection zones | <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |

## Typical applications


- Lighting controls for warehouses, industrial buildings, entrance halls and retail shops
- Smart high-bay luminaires
- Street lighting
- Security cameras

Further information on electrical characteristics please see page 16


## Dimension (in mm, inches in brackets)

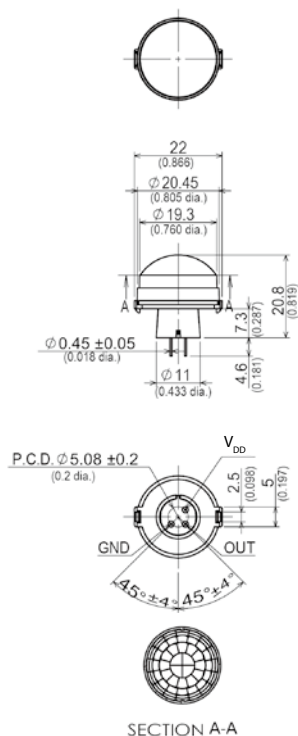

## Detection area

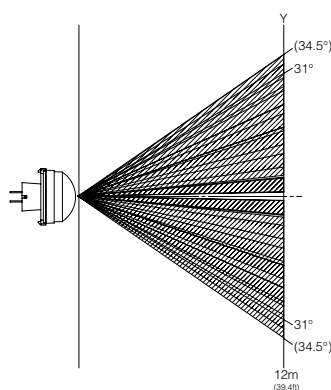

## X-Y cross section at 12m (39.4ft)

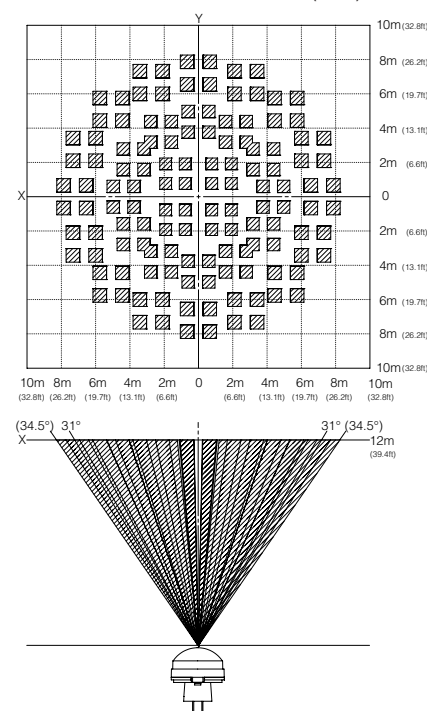

| Notes    | Standby current consumption | Output type              | Sensitivity | White                                                             | Black        | Pearl White  |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|--------------|--------------|
| High-end | 1μA                         | Digital (open collector) | Standard    | EKMB1106111                                                       | EKMB1106112  | EKMB1106113  |
|          | 2μA                         | Digital (open collector) | Standard    | EKMB1206111                                                       | EKMB1206112  | EKMB1206113  |
| Economy  | 6μA                         | Digital (open collector) | Standard    | EKMB1306111K                                                      | EKMB1306112K | EKMB1306113K |
|          | 170μA                       | Digital (open collector) | Standard    | EKMC1606111                                                       | EKMC1606112  | EKMC1606113  |
|          | 170μA                       | Analog (op amp)          | Adjustable  | EKMC2606111K                                                      | EKMC2606112K | EKMC2606113K |
| Special  | 6μA                         | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |              |              |
|          | 170μA                       | Digital (open collector) | High        |                                                                   |              |              |
|          | 170μA                       | Digital (open collector) | Low         |                                                                   |              |              |

## EKM - Horizontally Wide Detection Type



PaPIRs: 3rd generation


### World's first PIR with "Approach Sensing" technology

Panasonic presents the world's first PIR sensor in the shape of a hammerhead with a special optic, which is more sensitive to radial motion.


|                                                                                                                                                                                                      |            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Specified detection distance (Note 1 & 2)                                                                                                                                                            | up to 5m   |
| Field of view area A                                                                                                                                                                                 | 122° x 35° |
| Field of view area B                                                                                                                                                                                 | 150° x 20° |
| Detection zones area A                                                                                                                                                                               | 88         |
| Detection zones area B                                                                                                                                                                               | 16         |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$ (Area A)<br>> $\Delta T \geq 8^{\circ}\text{C}$ (Area B)<br>> Object speed: 1m/s<br>> Object size: 700 x 250mm<br>> Crossing 2 detection zones |            |
| <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended             |            |

Further information on electrical characteristics please see page 16

### Dimension (in mm, inches in brackets)

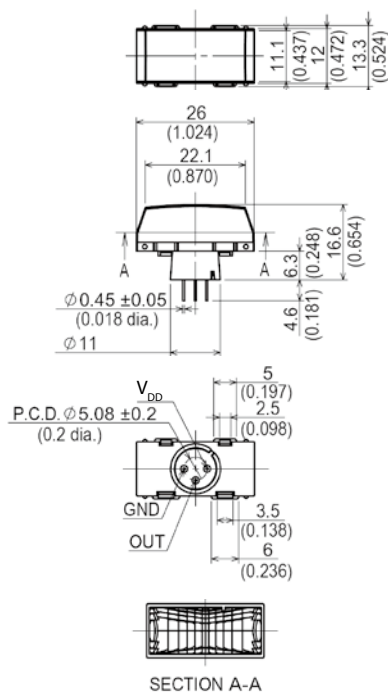

### Detection area

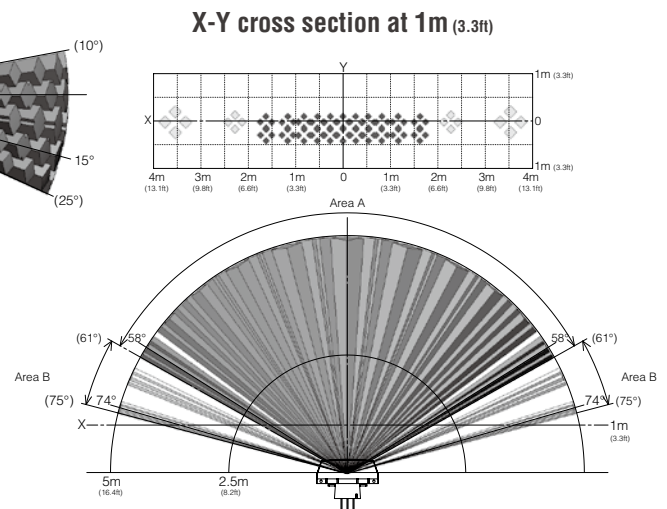

| Notes    | Standby current consumption | Output type              | Sensitivity | White                                                             | Black        | Pearl White  |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|--------------|--------------|
| High-end | 1μA                         | Digital (open collector) | Standard    | EKMB1105111                                                       | EKMB1105112  | EKMB1105113  |
|          | 2μA                         | Digital (open collector) | Standard    | EKMB1205111                                                       | EKMB1205112  | EKMB1205113  |
| Economy  | 6μA                         | Digital (open collector) | Standard    | EKMB1305111K                                                      | EKMB1305112K | EKMB1305113K |
|          | 170μA                       | Digital (open collector) | Standard    | EKMC1605111                                                       | EKMC1605112  | EKMC1605113  |
|          | 170μA                       | Analog (op amp)          | Adjustable  | EKMC2605111K                                                      | EKMC2605112K | EKMC2605113K |
| Special  | 6μA                         | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |              |              |
|          | 170μA                       | Digital (open collector) | High        |                                                                   |              |              |
|          | 170μA                       | Digital (open collector) | Low         |                                                                   |              |              |

# EKM - Wall Installation Detection Type (corner)



PaPIRs: 3rd generation

Lens diameter 20.7mm

Similar dimensions like the Long Distance Detection Type


|                                                                                                                                             |                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Specified detection distance<br/>(Note 1 &amp; 2)</b>                                                                                    | up to 12m (1st step lens)<br>up to 6m (2nd step lens)<br>up to 3m (3rd step lens)                                                                                                        |
| <b>Field of view</b>                                                                                                                        | 56° x 112°                                                                                                                                                                               |
| <b>Detection zones</b>                                                                                                                      | 68                                                                                                                                                                                       |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$<br>> Object speed: 1m/s<br>> Object size: 700 x 250mm<br>> Crossing 2 detection zones | <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |

Further information on electrical characteristics please see page 16

## Typical applications


- > Intrusion alarm sensors
- > Thermostats
- > Door intercom systems
- > Entrance and garden lamps

## Dimension (in mm, inches in brackets)

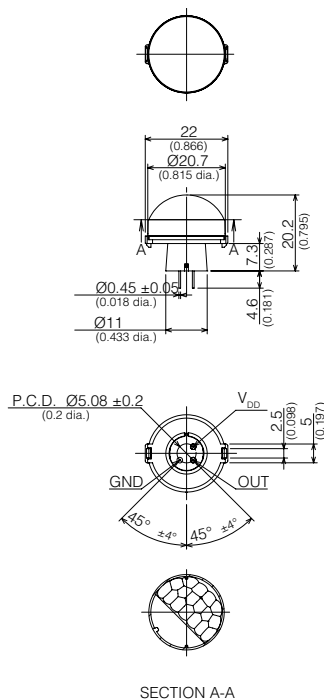

## Detection area

### X-Y cross section at 5m (16.4ft)

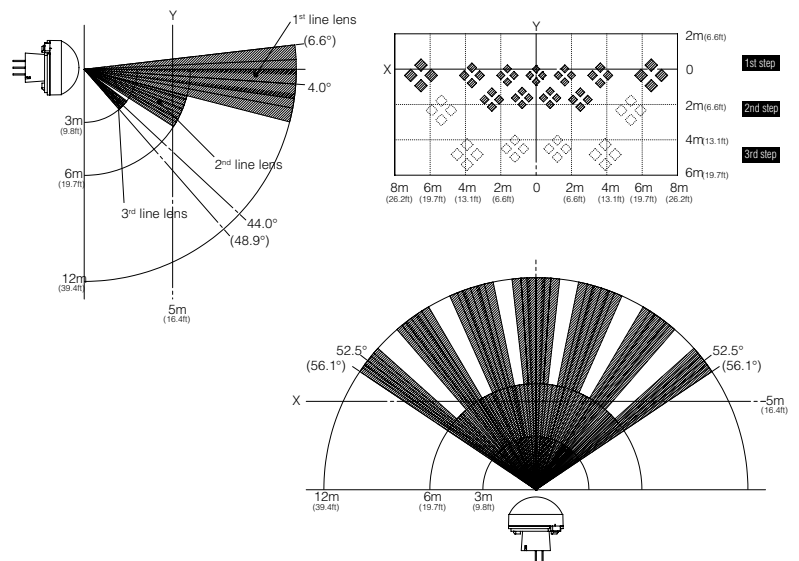

| Notes    | Standby current consumption | Output type              | Sensitivity | White                                                             | Black        | Pearl White  |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|--------------|--------------|
| High-end | 1μA                         | Digital (open collector) | Standard    | EKMB1104111                                                       | EKMB1104112  | EKMB1104113  |
|          | 2μA                         | Digital (open collector) | Standard    | EKMB1204111                                                       | EKMB1204112  | EKMB1204113  |
| Economy  | 6μA                         | Digital (open collector) | Standard    | EKMB1304111K                                                      | EKMB1304112K | EKMB1304113K |
|          | 170μA                       | Digital (open collector) | Standard    | EKMC1604111                                                       | EKMC1604112  | EKMC1604113  |
|          | 170μA                       | Analog (op amp)          | Adjustable  | EKMC2604111K                                                      | EKMC2604112K | EKMC2604113K |
| Special  | 6μA                         | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |              |              |
|          | 170μA                       | Digital (open collector) | High        |                                                                   |              |              |
|          | 170μA                       | Digital (open collector) | Low         |                                                                   |              |              |

## EKM - Long Distance Detection Type



PaPIRs: 3rd generation

Lens diameter 20.7mm

Similar dimensions like the Wall Installation Type


|                                                                                                                                                                                          |            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>Specified detection distance (Note 1)</b>                                                                                                                                             | up to 12m  |
| <b>Typical ceiling installation height (Note 2)</b>                                                                                                                                      | 7m         |
| <b>Field of view</b>                                                                                                                                                                     | 108° x 99° |
| <b>Detection zones</b>                                                                                                                                                                   | 92         |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$<br>> Object speed: 1m/s<br>> Object size: 700 x 250mm<br>> Crossing 2 detection zones                                              |            |
| <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |            |

### Typical applications


- › Lighting control for sport halls and public areas
- › Intrusion alarm sensors
- › Street lighting
- › Security cameras

Further information on electrical characteristics please see page 16

### Dimension (in mm, inches in brackets)

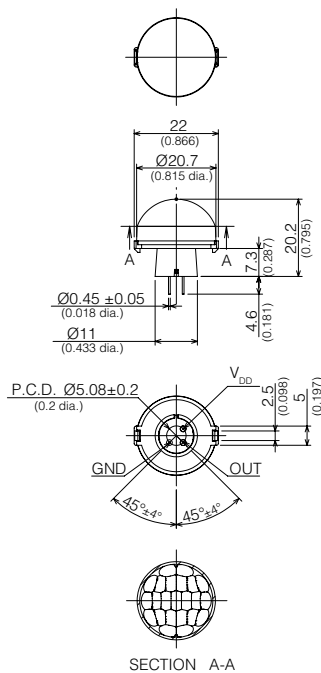

### Detection area

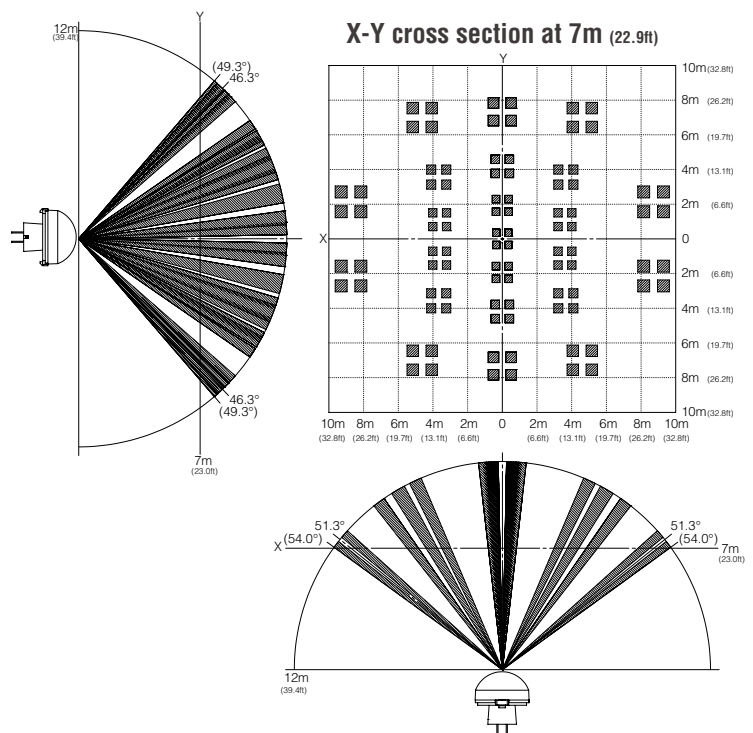

| Notes    | Standby current consumption | Output type              | Sensitivity | White                                                             | Black        | Pearl White  |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|--------------|--------------|
| High-end | 1μA                         | Digital (open collector) | Standard    | EKMB1103111                                                       | EKMB1103112  | EKMB1103113  |
|          | 2μA                         | Digital (open collector) | Standard    | EKMB1203111                                                       | EKMB1203112  | EKMB1203113  |
| Economy  | 6μA                         | Digital (open collector) | Standard    | EKMB1303111K                                                      | EKMB1303112K | EKMB1303113K |
|          | 170μA                       | Digital (open collector) | Standard    | EKMC1603111                                                       | EKMC1603112  | EKMC1603113  |
|          | 170μA                       | Analog (op amp)          | Adjustable  | EKMC2603111K                                                      | EKMC2603112K | EKMC2603113K |
| Special  | 6μA                         | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |              |              |
|          | 170μA                       | Digital (open collector) | High        |                                                                   |              |              |
|          | 170μA                       | Digital (open collector) | Low         |                                                                   |              |              |

**Note:** The specification shows the X-Y cross section at 5m.

Further information at [www3.panasonic.biz/ac/e/control/sensor/human/index.jsp](http://www3.panasonic.biz/ac/e/control/sensor/human/index.jsp)

# EKM - Lensless Type




PaPIRs: 3rd generation

Small sensor elements with a very high sensitivity (D, NEP)

Please contact us whenever a customized lens is required, the sensor shall be used with an external lens or for the design data of the pin-hole lens

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| <b>Detection sensitivity</b> | Average: $5.6\mu\text{W}/\text{cm}^2$<br>Maximum: $7.6\mu\text{W}/\text{cm}^2$ |
|------------------------------|--------------------------------------------------------------------------------|

Detection sensitivity is measured by following system


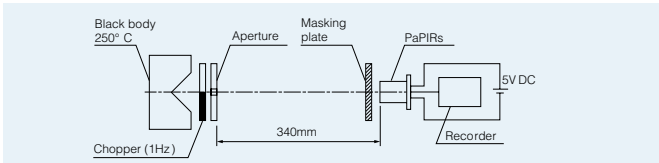


Further information on electrical characteristics please see page 16

## Typical applications


- › Pin-hole lens
- › Combination with lenses from external suppliers

## Dimension (in mm, inches in brackets)

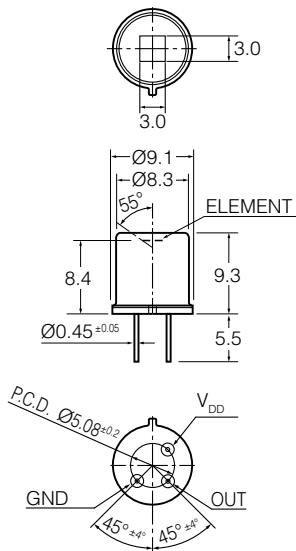

## Detection area

Pin-hole lens example

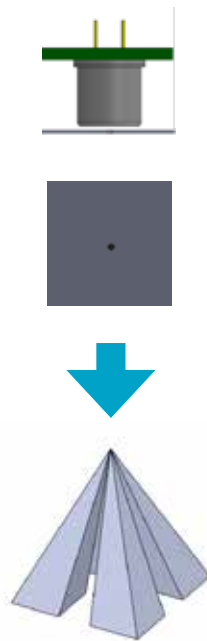

| Notes    | Standby current consumption | Output type              | Sensitivity | Part numbers                                                      |
|----------|-----------------------------|--------------------------|-------------|-------------------------------------------------------------------|
| High-end | 1μA                         | Digital (open collector) | Standard    | EKMB1100100                                                       |
|          | 2μA                         | Digital (open collector) | Standard    | EKMB1200100                                                       |
| Economy  | 6μA                         | Digital (open collector) | Standard    | EKMB1300100K                                                      |
|          | 170μA                       | Digital (open collector) | Standard    | EKMC1600100                                                       |
|          | 170μA                       | Analog (op amp)          | Adjustable  | EKMC2600100K                                                      |
| Special  | 6μA                         | Digital (open collector) | High        | Please contact us if a higher or a lower sensitivity is required. |
|          | 170μA                       | Digital (open collector) | High        |                                                                   |
|          | 170μA                       | Digital (open collector) | Low         |                                                                   |

## EKM - Characteristics

### EKM - Maximum rated values

| Items                | EKMB series                                                                       | EKMC series  |
|----------------------|-----------------------------------------------------------------------------------|--------------|
| Power supply voltage | -0.3 to 4.5VDC                                                                    | -0.3 to 7VDC |
| Ambient temperature  | -20 to 60°C<br>-20 to 55°C (high sensitivity type)<br>(no frost, no condensation) |              |
| Storage temperature  | -20 to 70°C                                                                       |              |

### EKM - Electrical characteristics (digital output types)

| Item                                                     | Symbol    |     | EKMB11□ series<br>(1μA) | EKMB12□ series<br>(2μA) | EKMB13□K series<br>(6μA) | EKMC16□ series<br>(170μA) | Conditions                                                                                                  |
|----------------------------------------------------------|-----------|-----|-------------------------|-------------------------|--------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------|
| Operating voltage                                        | $V_{DD}$  | Max | 4.0VDC                  |                         |                          | 6.0VDC                    | —                                                                                                           |
|                                                          |           | Min | 2.3VDC                  |                         |                          | 3.0VDC                    |                                                                                                             |
| Current consumption<br>(in standby/sleep mode)<br>Note 1 | $I_w$     | Ave | 1μA                     | 2μA                     | 6μA                      | 170μA                     | Ambient temperature: 25°C<br>$I_{OUT} = 0A$<br>EKMB series: $V_{DD} = 3VDC$<br>EKMC series: $V_{DD} = 5VDC$ |
| Output current<br>(during detection period)<br>Note 2    | $I_{OUT}$ | Max | 100μA                   |                         |                          |                           | Ambient temperature: 25°C<br>$V_{OUT} \geq V_{DD} - 0.5VDC$                                                 |
| Output voltage<br>(during detection period)              | $V_{OUT}$ | Min | $V_{DD} - 0.5V$         |                         |                          |                           | Ambient temperature: 25°C                                                                                   |
| Circuit stability time<br>(when voltage is applied)      | $t_{WU}$  | Ave | 25 seconds              |                         | —                        | —                         | Ambient temperature: 25°C<br>$I_{OUT} = 0A$<br>EKMB series: $V_{DD} = 3VDC$<br>EKMC series: $V_{DD} = 5VDC$ |
|                                                          |           | Max | 210 seconds             |                         | 10 seconds               | 30 seconds                |                                                                                                             |

**Note 1:** The total current consumption during detection is the current consumption in standby mode ( $I_w$ ) plus the output current ( $I_{OUT}$ ). For the 1μA type the average current consumption ( $I_w$ ) is 1μA in sleep mode and 1.9μA in standby mode. Please also refer to the timing charts on the next page.

**Note 2:** Please select an output resistor (pull-down concept) in accordance with  $V_{OUT}$  so that the output current is maximum 100μA.

### EKM - Electrical characteristics (analog output)


| Item                                               | Symbol    | EKMC26□K series |                     | Remarks                                                             |
|----------------------------------------------------|-----------|-----------------|---------------------|---------------------------------------------------------------------|
| Operating voltage                                  | $V_{DD}$  | Max             | 5.5V                | —                                                                   |
|                                                    |           | Min             | 3.0V                |                                                                     |
| Current consumption<br>(in standby mode) Note1     | $I_w$     | Ave             | 170μA               | Ambient temperature = 25°C<br>$I_{OUT} = 0A$                        |
|                                                    |           | Max             | 350μA               |                                                                     |
| Output current<br>(during detection period) Note 2 | $I_{OUT}$ | Max             | 200μA               | —                                                                   |
| Analog output saturated voltage                    | $V_H$     | High            | Min. 1.9V           | —                                                                   |
|                                                    | $V_L$     | Low             | Max. 0.2V           | —                                                                   |
| Output offset voltage<br>(at non detection)        | $V_{OFF}$ | Max             | 1.2V                | Ambient temperature: 25°C<br>Steady output voltage at non detection |
|                                                    |           | Ave             | 1.1V                |                                                                     |
|                                                    |           | Min             | 1.0V                |                                                                     |
| Steady noise                                       | $V_N$     | Max             | 150mV <sub>PP</sub> | —                                                                   |
|                                                    |           | Ave             | 80mV <sub>PP</sub>  |                                                                     |
| Circuit stability time<br>(after applying voltage) | $t_{WU}$  | Max             | 30 seconds          | Ambient temperature: 25°C<br>$I_{OUT} = 0A$                         |

**Note 1:** The total current consumption during detection is the current consumption in standby mode ( $I_w$ ) plus the output current ( $I_{OUT}$ ).

**Note 2:** The output offset voltage has a certain tolerance. Please assure to measure the offset voltage before setting the upper and lower threshold values. Otherwise the threshold window could be unsymmetrical relative to the offset voltage.

## Timing chart

### 2μA / 6μA / 170μA type (digital output)

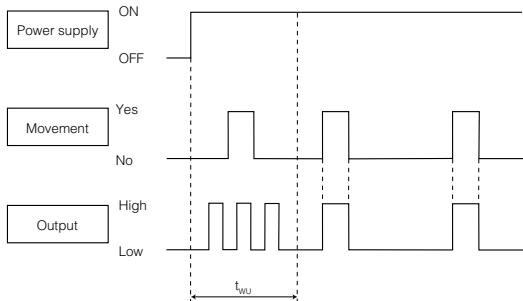


#### Explanation of the timing

$t_{wu}$  Circuit stability time: about 25 seconds (typ.) for 2μA type, max. 10 seconds for 6μA type, max. 30 seconds for 170μA type.

While the circuitry is stabilizing after the power is turned on, the sensor output is not fixed in the High or Low state. This is true regardless of whether or not the sensor has detected anything.

### 1μA type (digital output)

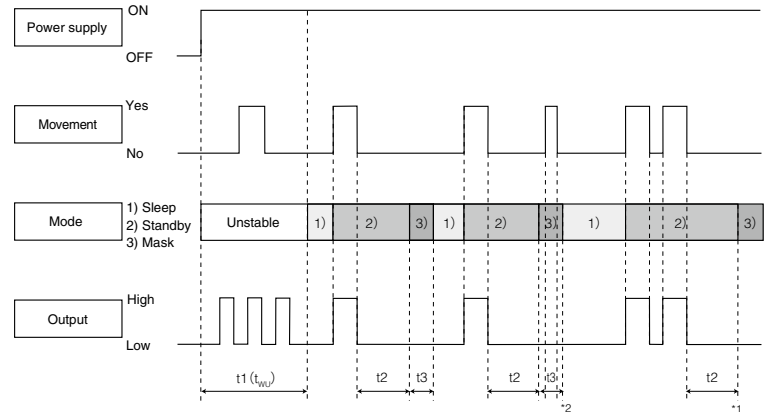


#### Explanation of modes

- 1) Sleep mode: When the output is Low. The electrical current consumption is around 1μA
- 2) Standby mode: After the sensor's output has reached High status, the sensor switches to standby mode. The electrical current consumption gets close to 1.9μA. When the sensor's output returns to its Low value after the "hold time" has expired, the sensor switches again to sleep mode.
- 3) Mask mode: Time during which the output is forced to Low status after the end of the standby mode. (No detection is possible during this period.)

#### Explanation of the timing

- t1) ( $t_{wu}$ ) Circuit stability time: about 25 seconds (typ.)  
While the circuitry is stabilizing after the power is turned on, the sensor output is not fixed in the High or Low state. This is true regardless of whether or not the sensor has detected anything.
- t2) Standby hold time: About 2.6 seconds (typ.) after the last detection of a signal. (\*1)
- t3) Mask time: About 1.3 seconds (typ.) During this stage, even if the sensor detects something, the output will not switch to High. (\*2)

### 170μA type (analog output)

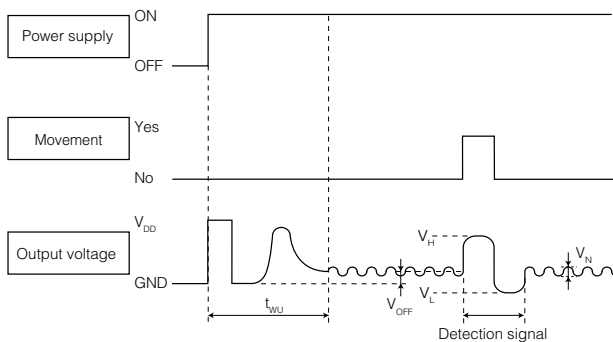

#### Explanation of the timing

$t_{wu}$  Circuit stability time: max. 30 seconds

While the circuitry is stabilizing after the power is turned on, the sensor output is not fixed. This is true regardless of whether or not the sensor has detected anything.

## AMN - Standard Detection Type



NaPiOn: 2nd generation

Small lens diameter of only 9.5mm


|                                                                                                                                             |                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Specified detection distance (Note 1)</b>                                                                                                | up to 5m                                                                                                                                                                                 |
| <b>Typical ceiling installation height (Note 2)</b>                                                                                         | 3m                                                                                                                                                                                       |
| <b>Field of view</b>                                                                                                                        | 120° x 106°                                                                                                                                                                              |
| <b>Detection zones</b>                                                                                                                      | 64                                                                                                                                                                                       |
| <b>Note 1:</b><br>> $\Delta T \geq 4^{\circ}\text{C}$<br>> Object speed: 1m/s<br>> Object size: 700 x 250mm<br>> Crossing 2 detection zones | <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |

Further information on electrical characteristics please see page 22

### Typical applications


- › Lighting controls
- › Heaters
- › Ventilators and air conditioners
- › Multi-functional printers

### Dimension (in mm, inches in brackets)

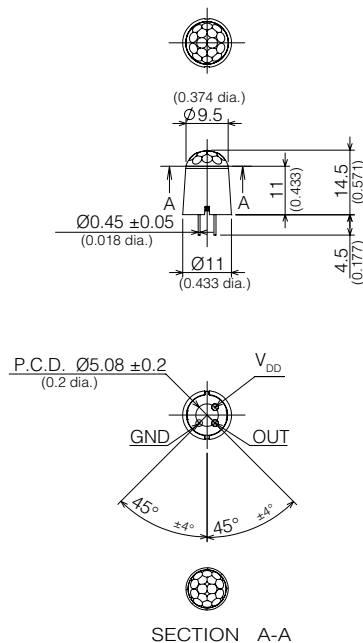

### Detection area

#### X-Y cross section at 3m (9.8ft)

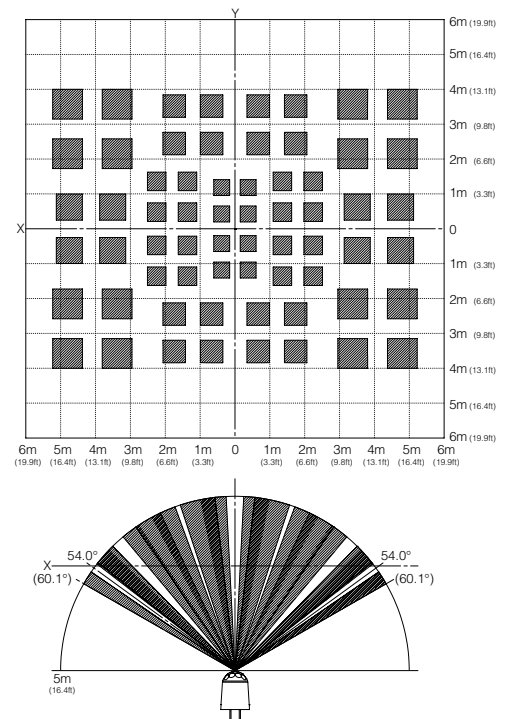

| Notes                 | Standby current consumption | Output type                 | Sensitivity | White    | Black    |
|-----------------------|-----------------------------|-----------------------------|-------------|----------|----------|
| NaPiOn 2nd generation | 170μA                       | Digital<br>(open collector) | Standard    | AMN31112 | AMN31111 |

**Note:** The specification shows the X-Y cross section at 2.5m.

# AMN - Slight Motion Detection Type



NaPiOn: 2nd generation  
Optimized for small movements


|                                                                                                                                                                                |                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specified detection distance (Note 1)                                                                                                                                          | up to 2m - 3.3m                                                                                                                                                                          |
| Typical ceiling installation height (Note 2)                                                                                                                                   | 3m                                                                                                                                                                                       |
| Field of view                                                                                                                                                                  | 107° x 106°                                                                                                                                                                              |
| Detection zones                                                                                                                                                                | 104                                                                                                                                                                                      |
| <b>Note 1:</b> <ul style="list-style-type: none"> <li>ΔT ≥ 4°C</li> <li>Object speed: 0.5m/s</li> <li>Object size: 200mm x 200mm</li> <li>Crossing 1 detection zone</li> </ul> | <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |

Further information on electrical characteristics please see page 22


## Typical applications

- › Lighting controls
- › Heaters
- › Ventilators and air conditioners
- › Multi-functional printers

## Dimension (in mm, inches in brackets)

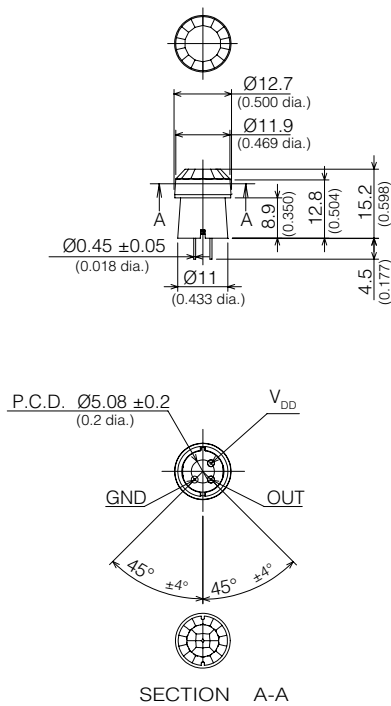

## Detection area

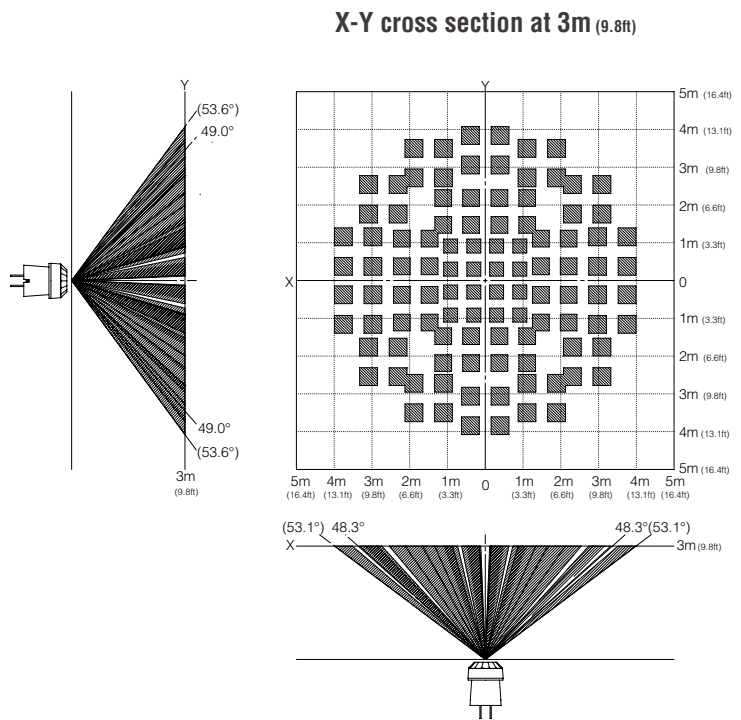

| Notes                 | Standby current consumption | Output type              | Sensitivity | White    | Black    |
|-----------------------|-----------------------------|--------------------------|-------------|----------|----------|
| NaPiOn 2nd generation | 170μA                       | Digital (open collector) | Standard    | AMN32112 | AMN32111 |

**Note:** The specification shows the X-Y cross section at 2m.

## AMN - Spot Detection Type



NaPiOn: 2nd generation

Flat lens

Lens diameter 8.9mm

Narrow field of view


|                                                                                                                                                                             |                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Specified detection distance (Note 1)</b>                                                                                                                                | up to 5m - 5.6m                                                                                                                                                                          |
| <b>Typical ceiling installation height (Note 2)</b>                                                                                                                         | 5m                                                                                                                                                                                       |
| <b>Field of view</b>                                                                                                                                                        | 57° x 42°                                                                                                                                                                                |
| <b>Detection zones</b>                                                                                                                                                      | 24                                                                                                                                                                                       |
| <b>Note 1:</b> <ul style="list-style-type: none"> <li>ΔT ≥ 4°C</li> <li>Object speed: 1m/s</li> <li>Object size: 700 x 250mm</li> <li>Crossing 2 detection zones</li> </ul> | <b>Note 2:</b><br>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended |

Further information on electrical characteristics please see pag 22

### Typical applications


- › Vending machines
- › Multi-functional printers
- › Intrusion alarm sensors for windows and doors
- › Digital signage

### Dimension (in mm, inches in brackets)

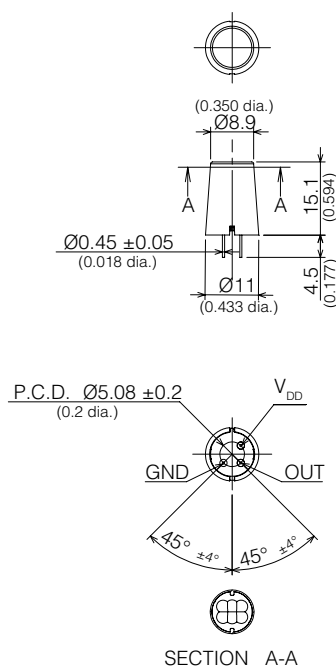

### Detection area

#### X-Y cross section at 5m (16.4ft)

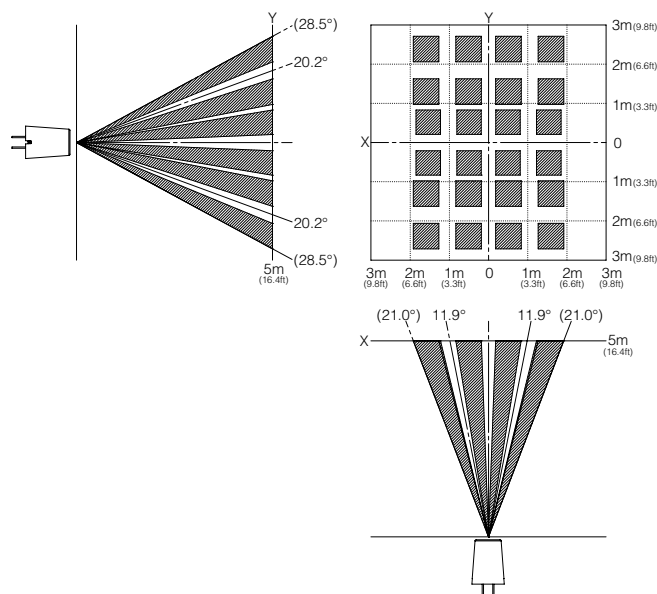

| Notes                 | Standby current consumption | Output type                 | Sensitivity | White    | Black    |
|-----------------------|-----------------------------|-----------------------------|-------------|----------|----------|
| NaPiOn 2nd generation | 170μA                       | Digital<br>(open collector) | Standard    | AMN33112 | AMN33111 |

# AMN - 10m Detection Type (long distance)

NaPiOn: 2nd generation




|                                                                                                                                                                             |                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specified detection distance (Note 1)                                                                                                                                       | up to 5 - 10m                                                                                                                                                                                |
| Typical ceiling installation height (Note 2)                                                                                                                                | 5m                                                                                                                                                                                           |
| Field of view                                                                                                                                                               | 120° x 107°                                                                                                                                                                                  |
| Detection zones                                                                                                                                                             | 80                                                                                                                                                                                           |
| <b>Note 1:</b> <ul style="list-style-type: none"> <li>ΔT ≥ 4°C</li> <li>Object speed: 1m/s</li> <li>Object size: 700 x 250mm</li> <li>Crossing 2 detection zones</li> </ul> | <b>Note 2:</b> <p>The sensitivity of passive infrared sensors is influenced by environmental conditions, so a performance evaluation test under representative conditions is recommended</p> |

## Typical applications


- › Lighting controls
- › Heaters
- › Ventilators and air-conditioners

Further information on electrical characteristics please see page 22

## Dimension (in mm, inches in brackets)

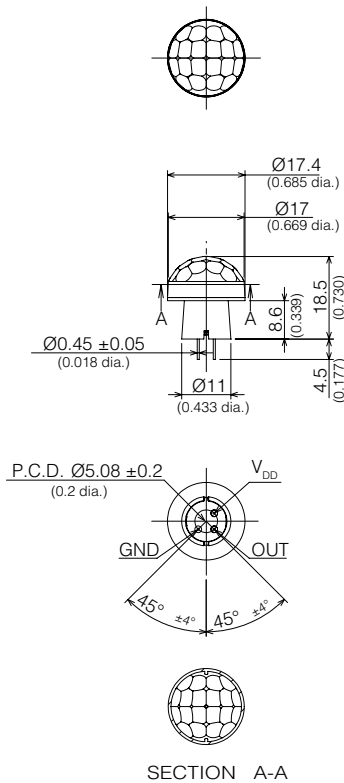

## Detection area

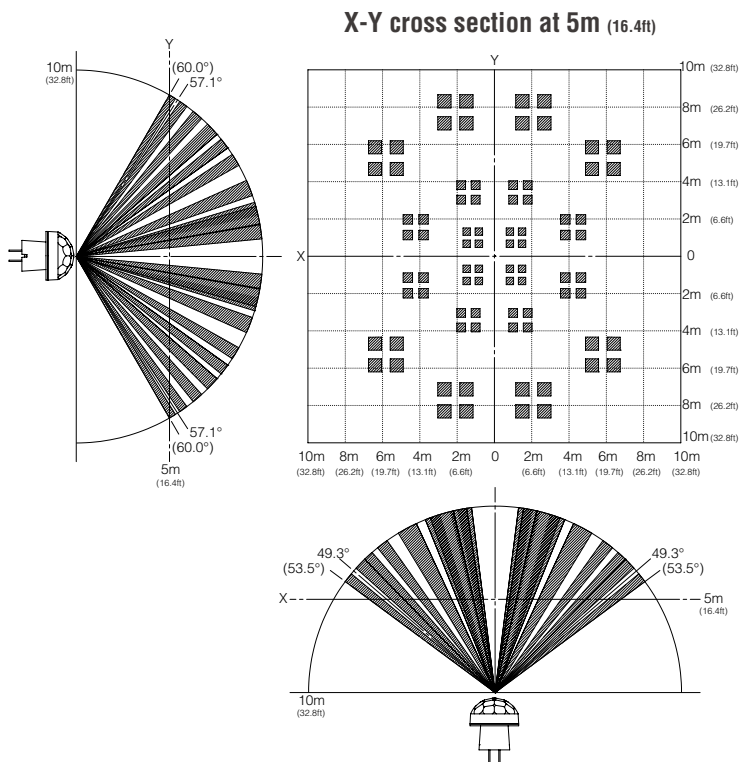

| Notes                 | Standby current consumption | Output type                 | Sensitivity | White    | Black    |
|-----------------------|-----------------------------|-----------------------------|-------------|----------|----------|
| NaPiOn 2nd generation | 170μA                       | Digital<br>(open collector) | Standard    | AMN34112 | AMN34111 |

## AMN - Characteristics

### AMN - Maximum rated values (digital output)

| Items                | Value                                       |
|----------------------|---------------------------------------------|
| Power supply voltage | -0.3 to 7VDC                                |
| Ambient temperature  | -20 to +60°C<br>(no frost, no condensation) |
| Storage temperature  | -20 to +70°C                                |

### AMN - Electrical characteristics (digital output)


| Items                                                      | Symbol    | AMN3* series |                 | Conditions                                                   |
|------------------------------------------------------------|-----------|--------------|-----------------|--------------------------------------------------------------|
| Operating voltage                                          | $V_{DD}$  | Max          | 6.0VDC          | —                                                            |
|                                                            |           | Min          | 3.0VDC          |                                                              |
| Current consumption (in standby mode)<br>Note 1            | $I_W$     | Ave          | 170μA           | Ambient temperature: 25°C<br>$I_{OUT} = 0A$ $V_{DD} = 5V$ DC |
| Output current (during detection)<br>Note 2                | $I_{OUT}$ | Max          | 100μA           | Ambient temperature: 25°C<br>$V_{OUT} \geq V_{DD} - 0.5V$ DC |
| Output voltage (during detection)                          | $V_{OUT}$ | Min          | $V_{DD} - 0.5V$ | Ambient temperature: 25°C                                    |
| Circuit stability time<br>(when voltage is applied) Note 3 | $t_{WU}$  | Max          | 30 seconds      | Ambient temperature: 25°C<br>$I_{OUT} = 0A$ $V_{DD} = 5V$ DC |

**Note 1:** The total current consumption is equal to the current consumption in standby mode ( $I_W$ ) plus the output current ( $I_{OUT}$ ).

**Note 2:** Please select an output resistor (pull-down concept) in accordance with  $V_{OUT}$  so that the output current is maximum 100μA. If the output current is more than 100μA, this may cause false alarms.

**Note 3:** The sensor temperature has to be constant for the time specified.

### Digital output

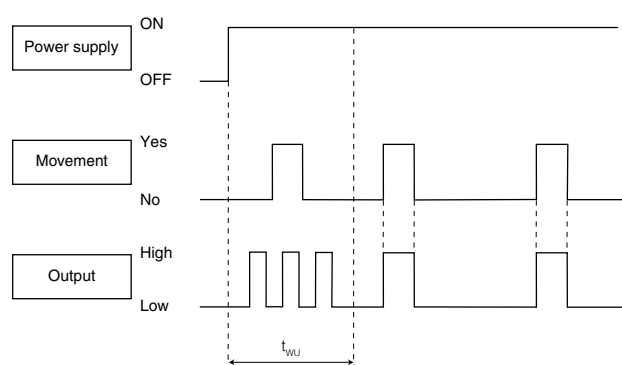

#### Explanation of the timing

$t_{WU}$  Circuit stability time: max. 30 seconds

While the circuitry is stabilizing after the power is turned on, the sensor output is not fixed in the High or Low state. This is true regardless of whether or not the sensor has detected anything.

## Cautions for use

### Basic principles

PaPIRs are pyroelectric infrared sensors that detect variations in infrared rays.

However, detection may not be successful in the following cases: lack of movement or no temperature change in the heat source. They could also detect the presence of heat sources other than a human body. Efficiency and reliability of the system may vary depending on the actual operating conditions:

- 1) Detecting heat sources other than the human body, such as:
  - a) small animals entering the detection area
  - b) When a heat source, for example sun light, incandescent lamp, car headlights etc., or strong light beam hit the sensor regardless whether the detection area is inside or outside.
  - c) Sudden temperature change inside or around the detection area caused by hot or cold wind from HVAC, or vapor from a humidifier, etc.
- 2) Difficulty in sensing the heat source
  - a) Glass, acrylic or similar materials standing between the target and the sensor may not allow a correct transmission of infrared rays.
  - b) Non-movement or quick movements of the heat source inside the detection area. (Please refer to the table on page 8 or 11 for details about movement speed.)
- 3) Expansion of the detection area  
In case of a considerable difference in the ambient temperature and the human body temperature, the detection area may be larger than the configured detection area.
- 4) Malfunction / Detection error  
On rare occasions, an erroneous detection signal may be output due to the nature of pyroelectric element. When the application cannot tolerate erroneous detection signals, take countermeasures by introducing a pulse-count circuit, etc.
- 5) Detection distance  
Panasonic's PIR Motion sensors state the detection distance in the specifications because they are usually provided with the lens (please refer to item 6 for lensless types). The PIR Motion sensor could detect variations in infrared rays however such variations are decided by following three factors.
  - The temperature difference between the target and the surroundings:  
The larger the temperature difference, the easier it is to detect targets.
  - Movement speed: If the target is moving at a slower or faster speed than specified in the tables, the detection ability may be lower.
  - Target size: The human body is the standard. If the target is smaller or larger than specified in the table, the detection ability may be lower.  
The detection distance explained in our data sheet is defined by the three factors mentioned above. Panasonic's standard for the temperature difference between the target and the surrounding is defined as 4°C. The larger the temperature difference, the longer the detection distance. If the temperature difference is 8°C, which is twice as much as the standard, the detection distance will be approx. 1.4 times longer than the distance at 4°C. For example, if targets at a distance of 5m can be detected at 4°C, then the sensor can detect targets at a distance of 7m at 8°C. (This is based on the theory that the detection sensitivity will vary inversely with the square of the distance.)
- 6) Lensless Type  
The lensless type cannot detect any targets because it is not possible to focus infrared variations into the sensor chip. It is not possible to determine the detection distance and the field of view without a lens. Please provide your own lens based on your lens design concept.
- 7) Lens material and the plate setting in front of the lens  
Typically, the only material that can be passed by infrared rays is Polyethylene. (The lens material of Panasonic's PIR Motion sensors is "High density polyethylene, HDPE".) When you need to set a plate in front of the lens, please choose one made from the Polyethylene. Please note the thickness or color of the plate will affect the detection ability, e.g. it may make the detection distance shorter. Therefore, please confirm by testing the sensor with the plate under realistic conditions.

### Cautions

- 1) Refer to the newest specification regarding optimal operating environment conditions.
- 2) Do not solder with a soldering iron above 350°C (662°F) or for more than 3 seconds.  
This sensor should be hand-soldered.
- 3) To maintain stability of the product, always mount it on a printed circuit board.
- 4) Do not use liquids to wash the sensor. If washing fluid gets into the lens, it can reduce the performance.
- 5) Do not use a sensor after it has fallen on the ground.
- 6) The sensor may be damaged by  $\pm 200$  volts of static electricity.  
Avoid direct hand contact with the pins and be very careful when operating the product.
- 7) When wiring the product, always use shielded cables and minimize the wiring length to prevent noise disturbances.
- 8) The inner circuit board can be destroyed by a voltage surge.  
The use of surge absorption elements is highly recommended.  
Surge resistance: below the power supply voltage value indicated in the section on maximum rated values.
- 9) Please use a stabilized power supply. Noise from the power supply can cause operating errors.  
Noise resistance: max.  $\pm 20V$  (square waves with a width of 50ns or 1 $\mu$ s)  
To reduce the effect of noise from the power supply, install a capacitor on the sensor's power supply pin.
- 10) Operation errors can be caused by noise from static electricity, lightnings, cell phones, amateur radio, broadcasting offices, etc
- 11) The detection performance can be reduced by dirt on the lens, please be careful.
- 12) The lens is made of soft materials (Polyethylene).  
Please avoid adding weight or impacts that may change its shape, causing operation errors or reduced performance.
- 13) The specified temperature and humidity levels are suggested to prolong usage. However, they do not guarantee durability or environmental resistance.  
Generally, high temperatures or high humidity levels will accelerate the deterioration of electrical components. Please consider both the planned usage and environment to determine the expected reliability and length of life of the product.
- 14) Do not attempt to clean this product with detergents or solvents such as benzene or alcohol, as these can cause shape or color alterations.
- 15) Avoid storage in high, low temperature or liquid environments.  
Also, avoid storage in environments containing corrosive gas, dust, salty air etc.  
Adverse conditions may cause performance deterioration and the sensor's main part or the metallic connectors could be damaged.
- 16) Storage conditions  
Temperature: +5 to +40°C, humidity: 30 to 75%  
Please use within 1 year after delivery.

### Safety precautions

Obey the following precautions to prevent injury or accidents.

- 1) Do not use these sensors under any circumstance in which the range of their ratings, environment conditions or other specifications are exceeded. Using the sensors in any way which causes their specifications to be exceeded may generate abnormally high levels of heat, emit smoke, etc., resulting in damage to the circuitry and possibly causing an accident.
- 2) Our company is committed to making products of the highest quality and reliability. Nevertheless, all electrical components are subject to natural deterioration, and durability of a product will depend on the operating environment and conditions of use. Continued use after such deterioration could lead to overheating, smoke or fire. Always use the product in conjunction with proper fire-prevention, safety and maintenance measures to avoid accidents, reduction in product life expectancy or break-down.
- 3) Before connecting, check the pin layout by referring to the connector wiring diagram, specifications diagram, etc., to verify that the connector is connected properly. Mistakes made in connection may cause unforeseen problems in operation, generate abnormally high levels of heat, emit smoke, etc., resulting in damage to the circuitry.
- 4) Do not use any motion sensor which has been disassembled or remodeled.
- 5) Failure modes of sensors include short-circuiting, open-circuiting and temperature rises. If this sensor is to be used in equipment where safety is a prime consideration, examine the possible effects of these failures on the equipment concerned, and ensure safety by providing protection circuits or protection devices.  
Example : Safety equipment and devices, traffic signals, burglar and disaster prevention devices, controlling and safety device for trains and motor vehicles