





RF Products

High performance components for communications

RF



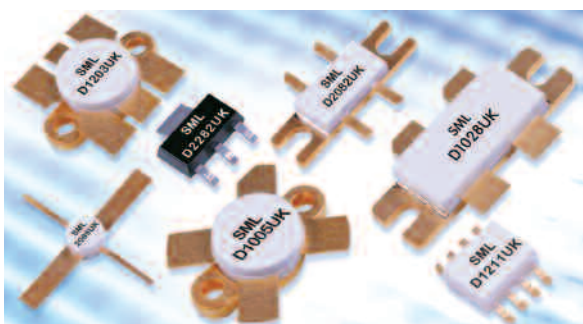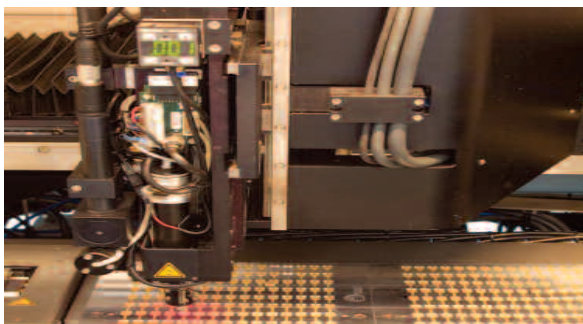

Quality and Experience in RF Technology

A Proven Record

Since 1974 Semelab has been supplying high quality, high reliability semiconductors and modules. Customers around the world are using Semelab devices in applications where performance, consistency and reliability are imperative. Equipment as diverse as television and radio transmitters, space vehicles, aircraft equipment and banking systems are all using Semelab products.

In-house Fab, Assembly, Test and Engineering

Semelab has its own ISO 9000 approved wafer fab at Glenrothes in Scotland, and performs assembly, screening and test operations at the company's facility in Lutterworth, England. All aspects of design, processing, testing, packaging and qualification take place within Semelab, thereby ensuring complete control over quality and reliability.

Semelab holds quality approvals for processes and products from major standards organisations, including ISO, ESA (European Space Agency), DSCC, and CECC amongst many others.

Extensive Range of RF Products

Semelab's range of RF power MOSFETs is one of the widest available and includes over 100 devices. There is a device for almost any application - from low cost to ultra-high performance, from 750mW to over 400W, and for frequencies to 1GHz.

Parts for 12.5V, 28V and 50V are available in both single-ended and push-pull formats. A comprehensive range of package styles including conventional flange mount, BeO-free flange-mount, surface mount and plastic enables Semelab devices to be used with any board technology. All parts are fully RoHS compliant.



Images of Garmin's GNS530 and GNS430 courtesy of Garmin Ltd. Copyright 1998-2006; Garmin Ltd. or its subsidiaries. All rights reserved.

Technical Excellence

Semelab RF MOSFETs are manufactured using a unique silicon Vertical DMOS process with gold metalisation which gives high performance and maximum reliability at high power levels. Among the benefits of the Semelab process are:

- Ultra wide band - 1MHz to 1GHz
- Wide power range - 750mW to 400W
- Exceptionally low feedback capacitance resulting in:
 - High gain via reduced Miller Effect (20dB VHF, 16dB UHF)
 - High stability
 - Easier design
- Low $R_{ds(on)}$ for high efficiency (>50%)
- High breakdown voltage (typically 85V for 28V parts) for exceptional ruggedness (up to 20:1 VSWR withstand)
- Excellent thermal stability


Packaging and Screening Options

We can provide alternative packaging and customised electrical selection and screening to meet customers' detailed specifications. Our specialist team has experience in all aspects of RF technology - including not only silicon but also package technology and RF design. As a result we are able to liaise with our customers 'engineer-to-engineer' and supply devices that meet the needs of the application precisely. Examples include Semelab's use of standard LD MOS packages for VDMOS MOSFETs to produce unique and proprietary BeO-free VDMOS parts that have higher gain and lower thermal resistance than conventional parts, and truly hermetic RF MOSFETs for space applications.

Continuity of Supply

Semelab has a policy of continuing supply on all products and has never discontinued an RF MOSFET. We are committed to supporting all our RF products indefinitely, and will build any product required by our customers provided only that supplies of the chosen package are available.

We can also provide alternatives from within our range to many devices discontinued by other manufacturers.

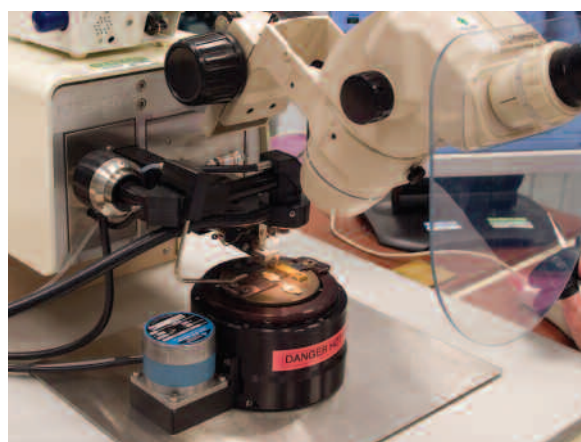

28V DEVICES FOR FREQUENCIES TO 1GHZ

Device	Min. Output Power (W)	Min. Efficiency (%)	Min. Gain (dB)	Test Frequency (MHz)	Operating Voltage (V)	Package Type	Single-Ended/ Push-Pull	Application Frequency	Active FET Configuration	Breakdown Voltage (V)
D1001UK	20	50	16	175	28	DA	SINGLE-ENDED	1-175MHz	1	70
D1002UK	40	50	16	175	28	DA	SINGLE-ENDED	1-175MHz	2	70
D1003UK	60	50	16	175	28	DM	SINGLE-ENDED	1-175MHz	3	70
D1004UK	80	50	16	175	28	DT	SINGLE-ENDED	1-175MHz	4	70
D1005UK	80	50	16	175	28	DM	SINGLE-ENDED	1-175MHz	4	70
D1006UK	120	50	14	175	28	DV	SINGLE-ENDED	1-200MHz	6	70
D1007UK	40	50	13	400	28	DK	PUSH-PULL	1-1000MHz	1+1	70
D1008UK	80	50	13	400	28	DK	PUSH-PULL	1-500MHz	2+2	70
D1009UK	150	50	10	400	28	DR	PUSH-PULL	1-500MHz	4+4	70
D1010UK	125	60	10	400	28	DR	PUSH-PULL	1-500MHz	4+4	70
D1011UK	10	50	13	500	28	SO8	SINGLE-ENDED	1-1000MHz	1	70
D1012UK	100	50	10	500	28	DH	PUSH-PULL	1-500MHz	3+3	70
D1013UK	20	50	13	500	28	DP	SINGLE-ENDED	1-1000MHz	1	70
D1014UK	40	50	12	500	28	DP	SINGLE-ENDED	1-500MHz	2	70
D1015UK	125	50	13	400	28	DH	PUSH-PULL	1-400MHz	4+4	70
D1016UK	40	50	13	400	28	DQ	PUSH-PULL	1-1000MHz	1+1	70
D1017UK	150	50	13	175	28	DM	SINGLE-ENDED	1-200MHz	6	70
D1018UK	100	50	10	500	28	DD	PUSH-PULL	1-500MHz	3+3	70
D1019UK	20	50	16	175	28	DW	SINGLE-ENDED	1-175MHz	1	70
D1020UK	150	50	10	400	28	DR	PUSH-PULL	1-500MHz	5+5	70
D1021UK	125	50	13	400	28	DK	PUSH-PULL	1-400MHz	4+4	70
D1022UK	100	50	10	500	28	DK	PUSH-PULL	1-500MHz	3+3	70
D1023UK	60	50	16	175	28	DT	SINGLE-ENDED	1-175MHz	3	70
D1024UK	40	50	13	400	28	DD	PUSH-PULL	1-500MHz	1+1	70
D1025UK	100	50	16	175	28	DT	SINGLE-ENDED	1-175MHz	5	70
D1027UK	150	50	13	175	28	DR	PUSH-PULL	1-200MHz	6+6	70
D1028UK	300	60	13	175	28	DR	PUSH-PULL	1-200MHz	6+6	70
D1029UK	350	60	13	175	28	DR	PUSH-PULL	1-200MHz	7+7	70
D1030UK	400	50	13	175	28	DR	PUSH-PULL	1-200MHz	8+8	70
D1031UK	10	50	13	500	28	F-0127	SINGLE-ENDED	1-1000MHz	1	70
D1034UK	80	50	13	400	28	DD	PUSH-PULL	1-500MHz	2+2	70
D1036UK	100	50	14	175	28	DM	SINGLE-ENDED	1-175MHz	5	70
D1040UK	400	65	16	108	28	DR	PUSH-PULL	1-108MHz	7+7	70
D1053UK	50	45	7.5	1000	28	DB	PUSH-PULL	1-1000MHz	1+1+1+1	70
D1082UK	4	40	13	200	28	TO251	SINGLE-ENDED	1-200MHz	1	70
D1083UK	4	40	13	200	28	TO263	SINGLE-ENDED	1-200MHz	1	70
D1084UK	4	40	13	200	28	TO220	SINGLE-ENDED	1-200MHz	1	70
D1093UK	10	50	13	500	28	SOT171	SINGLE-ENDED	1-1000MHz	4	65
D1094UK	20	50	11	500	28	SOT171	SINGLE-ENDED	1-1000MHz	6	65

- Ultra-high linearity, low $R_{ds(on)}$ and high efficiency
- Very high gain and exceptionally rugged
- We will be pleased to discuss your requirements for die and package configurations not listed above

DA Package



DB Package



DD Package



DH Package



DK Package



DM Package



DP Package



DP Flangeless Package



28V DEVICES OPTIMISED FOR HIGHER FREQUENCIES

Device	Min. Output Power (W)	Min. Efficiency (%)	Min. Gain (dB)	Test Frequency (MHz)	Operating Voltage (V)	Package Type	Single-Ended/ Push-Pull	Application Frequency	Active FET Configuration	Breakdown Voltage (V)
D2001UK	2.5	40	13	1000	28	DP	SINGLE-ENDED	1-1000MHz	1	65
D2002UK	5	40	13	1000	28	DP	SINGLE-ENDED	1-1000MHz	2	65
D2003UK	5	40	13	1000	28	DQ	PUSH-PULL	1-1000MHz	1+1	65
D2004UK	10	40	10	1000	28	DK	PUSH-PULL	1-1000MHz	2+2	65
D2005UK	7.5	40	13	1000	28	DP	SINGLE-ENDED	1-1000MHz	3	65
D2006UK	15	40	13	1000	28	DK	PUSH-PULL	1-1000MHz	3+3	65
D2007UK	5	40	13	400	28	DA	SINGLE-ENDED	1-500MHz	2	65
D2008UK	5	40	13	400	28	T039	SINGLE-ENDED	1-400MHz	2	65
D2009UK	10	40	10	1000	28	DQ	PUSH-PULL	1-1000MHz	2+2	65
D2010UK	20	40	13	1000	28	DP	SINGLE-ENDED	1-1000MHz	8	65
D2011UK	20	40	10	1000	28	DBC1	SINGLE-ENDED	1-1000MHz	8	65
D2012UK	10	40	10	1000	28	DP	SINGLE-ENDED	1-1000MHz	4	65
D2013UK	20	40	10	1000	28	DK	PUSH-PULL	1-1000MHz	4+4	65
D2014UK	2.5	40	13	500	28	SOT171	SINGLE-ENDED	1-1000MHz	1	65
D2015UK	5	40	13	500	28	SOT171	SINGLE-ENDED	1-1000MHz	2	65
D2016UK	30	40	10	1000	28	DK	PUSH-PULL	1-1000MHz	6+6	65
D2017UK	5	40	13	1000	28	Flangeless DP	SINGLE-ENDED	1-1000MHz	2	65
D2018UK	10	40	10	1000	28	Flangeless DP	SINGLE-ENDED	1-1000MHz	4	65
D2019UK	2.5	40	13	1000	28	SO8	SINGLE-ENDED	1-1000MHz	1	65
D2020UK	5	40	13	1000	28	SO8	SINGLE-ENDED	1-1000MHz	2	65
D2021UK	7.5	40	13	1000	28	SO8	SINGLE-ENDED	1-1000MHz	3	65
D2022UK	25	40	13	500	28	DQ	PUSH-PULL	1-500MHz	5+5	65
D2024UK	10	40	10	1000	28	SO8	SINGLE-ENDED	1-1000MHz	4	65
D2026UK	5	40	13	400	28	DW	SINGLE-ENDED	1-500MHz	2	65
D2029UK	2.5	40	13	1000	28	F-0127	SINGLE-ENDED	1-1000MHz	1	65
D2030UK	5	40	13	1000	28	F-0127	SINGLE-ENDED	1-1000MHz	2	65
D2031UK	7.5	40	13	1000	28	F-0127	SINGLE-ENDED	1-1000MHz	3	65
D2032UK	5	40	13	1000	28	DK	PUSH-PULL	1-1000MHz	1+1	65
D2053UK	5	40	13	1000	28	DBC4	PUSH-PULL	1-1000MHz	1+1	65
D2054UK	10	40	13	1000	28	DBC4	PUSH-PULL	1-1000MHz	2+2	65
D2081UK	0.75	40	11	1000	28	SOT223	SINGLE-ENDED	1-1000MHz	1	65
D2082UK	40	40	8	1000	28	DK	PUSH-PULL	1-1000MHz	8+8	65
D2089UK	1	40	20	30	28	E16	SINGLE-ENDED	1-1000MHz	1	65

The D20 series is optimised for performance at higher frequencies:

- High gain at higher frequencies
- Low capacitance
- Excellent Linearity
- Low $R_{ds(on)}$
- The exceptional ruggedness of the D10 series is retained
- We will be pleased to discuss your requirements for die and package configurations not listed above

DQ Package



DR Package



DT Package



DV Package



DW Package



E16 Package



SOT171 Package



T039 Package



12.5V DEVICES IN RANGES TO 500MHZ AND 1GHZ

Device	Min. Output Power (W)	Min. Efficiency (%)	Min. Gain (dB)	Test Frequency (MHz)	Operating Voltage (V)	Package Type	Single-Ended/ Push-Pull	Application Frequency	Active FET Configuration	Breakdown Voltage (V)
D1201UK	10	50	10	500	12.5	DP	SINGLE-ENDED	1-500MHz	1	40
D1202UK	20	50	10	400	12.5	DP	SINGLE-ENDED	1-500MHz	2	40
D1203UK	30	50	10	175	12.5	DM	SINGLE-ENDED	1-200MHz	3	40
D1204UK	30	50	10	175	12.5	DT	SINGLE-ENDED	1-200MHz	3	40
D1207UK	20	50	10	400	12.5	DQ	PUSH-PULL	1-500MHz	1+1	40
D1208UK	40	50	10	400	12.5	DK	PUSH-PULL	1-500MHz	2+2	40
D1209UK	20	50	10	400	12.5	DK	PUSH-PULL	1-500MHz	1+1	40
D1210UK	10	50	13	175	12.5	DA	SINGLE-ENDED	1-175MHz	1	40
D1211UK	10	50	10	500	12.5	SO8	SINGLE-ENDED	1-500MHz	1	40
D1212UK	60	50	10	175	12.5	DH	PUSH-PULL	1-200MHz	3+3	40
D1213UK	6	50	8	500	7.2	DBC1	SINGLE-ENDED	1-500MHz	2	40
D1217UK	40	50	10	400	12.5	DD	PUSH-PULL	1-500MHz	2+2	40
D1218UK	60	50	10	175	12.5	DD	PUSH-PULL	1-200MHz	3+3	40
D1221UK	10	50	10	175	12.5	DW	SINGLE-ENDED	1-175MHz	1	40
D1222UK	60	50	10	175	12.5	DK	PUSH-PULL	1-200MHz	3+3	40
D1231UK	10	50	10	500	12.5	F-0127	SINGLE-ENDED	1-500MHz	1	40
D1260UK	40	50	10	175	12.5	DT	SINGLE-ENDED	1-175MHz	4	40
D2201UK	2.5	40	10	1000	12.5	DP	SINGLE-ENDED	1-1000MHz	1	40
D2202UK	5	40	10	1000	12.5	DP	SINGLE-ENDED	1-1000MHz	2	40
D2203UK	5	40	10	1000	12.5	DQ	PUSH-PULL	1-1000MHz	1+1	40
D2204UK	20	40	10	900	12.5	DT	SINGLE-ENDED	1-1000MHz	8	40
D2205UK	7.5	40	10	1000	12.5	DP	SINGLE-ENDED	1-1000MHz	3	40
D2206UK	5	40	10	400	12.5	TO-39	SINGLE-ENDED	1-400MHz	2	40
D2207UK	10	40	10	1000	12.5	DQ	PUSH-PULL	1-1000MHz	2+2	40
D2208UK	40	40	10	500	12.5	DK	PUSH-PULL	1-500MHz	8+8	40
D2210UK	20	40	10	500	12.5	DP	SINGLE-ENDED	1-1000MHz	8	40
D2211UK	10	40	7	1000	7.2	DBC1	SINGLE-ENDED	1-1000MHz	8	40
D2212UK	10	40	10	1000	12.5	DP	SINGLE-ENDED	1-1000MHz	4	40
D2213UK	20	40	10	1000	12.5	DK	PUSH-PULL	1-1000MHz	4+4	40
D2214UK	10	40	10	1000	12.5	Flangeless DP	SINGLE-ENDED	1-1000MHz	4	40
D2218UK	20	40	10	1000	12.5	Flangeless DP	SINGLE-ENDED	1-1000MHz	8	40
D2219UK	2.5	40	10	1000	12.5	SO8	SINGLE-ENDED	1-1000MHz	1	40
D2220UK	5	40	10	1000	12.5	SO8	SINGLE-ENDED	1-1000MHz	2	40
D2221UK	7.5	40	10	1000	12.5	SO8	SINGLE-ENDED	1-1000MHz	3	40
D2224UK	5	50	7	850	7.2	SO8	SINGLE-ENDED	1-1000MHz	4	40
D2225UK	5	40	10	1000	12.5	SO8	PUSH-PULL	1-1000MHz	1+1	40
D2229UK	2.5	40	10	1000	12.5	F-0127	SINGLE-ENDED	1-1000MHz	1	40
D2230UK	5	40	10	1000	12.5	F-0127	SINGLE-ENDED	1-1000MHz	2	40
D2231UK	7.5	40	10	1000	12.5	F-0127	SINGLE-ENDED	1-1000MHz	3	40
D2232UK	5	50	7	850	7.2	F-0127	SINGLE-ENDED	1-1000MHz	4	40
D2240UK	5	40	10	1000	12.5	M227	PUSH-PULL	1-1000MHz	1+1	40
D2241UK	10	40	10	1000	12.5	M227	PUSH-PULL	1-1000MHz	2+2	40
D2253UK	5	40	13	1000	12.5	DBC4	PUSH-PULL	1-1000MHz	1+1	40
D2254UK	10	40	10	1000	12.5	DBC4	PUSH-PULL	1-1000MHz	2+2	40
D2256UK	20	40	10	1000	12.5	DBC4	PUSH-PULL	1-1000MHz	4+4	40
D2282UK	0.75	40	8	1000	6	SOT223	SINGLE-ENDED	1-1000MHz	1	40
D2290UK	1	40	10	1000	12.5	SOT143	SINGLE-ENDED	1-1000MHz	1	40
D2293UK	10	40	11	500	12.5	SOT171	SINGLE-ENDED	1-1000MHz	4	40
D2294UK	15	40	11	500	12.5	SOT171	SINGLE-ENDED	1-1000MHz	6	40

T0220P Package



DBC1 Package



DBC4 Package



F0127 Package



SO8 Package




SOT143 Package



SOT223 Package



M227 Package



T0263 Package



50V DEVICES FOR FREQUENCIES TO 500MHZ

Device	Min. Output Power (W)	Min. Efficiency (%)	Min. Gain (dB)	Test Frequency (MHz)	Operating Voltage (V)	Package Type	Single-Ended/ Push-Pull	Application Frequency	Active FET Configuration	Breakdown Voltage (V)
D5001UK	20	50	16	175	50	DA	SINGLE-ENDED	1-175MHz	1	125
D5002UK	40	50	16	175	50	DA	SINGLE-ENDED	1-175MHz	2	125
D5003UK	60	50	16	175	50	DM	SINGLE-ENDED	1-175MHz	3	125
D5005UK	80	50	16	175	50	DM	SINGLE-ENDED	1-175MHz	4	125
D5006UK	150	40	13	175	50	DV	SINGLE-ENDED	1-200MHz	7	125
D5007UK	150	40	13	175	50	DMX	SINGLE-ENDED	1-200MHz	7	125
D5011UK	10	50	13	500	50	SO8	SINGLE-ENDED	1-1000MHz	1	125
D5012UK	100	50	10	500	50	DH	PUSH-PULL	1-500MHz	3+3	125
D5013UK	20	50	13	500	50	DP	SINGLE-ENDED	1-500MHz	1	125
D5014UK	40	50	12	500	50	DP	SINGLE-ENDED	1-500MHz	2	125
D5017UK	150	50	10	175	50	DM	SINGLE-ENDED	1-175MHz	6	125
D5018UK	100	50	10	500	50	DD	PUSH-PULL	1-500MHz	3+3	125
D5021UK	125	50	13	400	50	DK	PUSH-PULL	1-400MHz	4+4	125
D5028UK	300	60	13	175	50	DR	PUSH-PULL	1-200MHz	6+6	125
D5029UK	350	60	13	175	50	DR	PUSH-PULL	1-200MHz	7+7	125
D5030UK	400	50	13	175	50	DR	PUSH-PULL	1-200MHz	8+8	125
D5050UK	300	50	20	175	50	DMX	SINGLE-ENDED	1-200MHz	12	125

NEW BeO FREE PACKAGING TECHNOLOGY

Device	Min. Output Power (W)	Min. Efficiency (%)	Min. Gain (dB)	Test Frequency (MHz)	Operating Voltage (V)	Package Type	Single-Ended/ Push-Pull	Application Frequency	Active FET Configuration	Breakdown Voltage (V)
DMD1006	120	50	16	175	28	D2 or A2	SINGLE-ENDED	1-200MHz	6	70
DMD1009	150	50	12	400	28	D1 or A1	PUSH-PULL	1-500MHz	4+4	70
DMD1010	125	50	13	400	28	D1 or A1	PUSH-PULL	1-500MHz	4+4	70
DMD1012	100	50	13	500	28	D1 or A1	PUSH-PULL	1-500MHz	3+3	70
DMD1020	150	50	13	400	28	D1 or A1	PUSH-PULL	1-500MHz	5+5	70
DMD1028	300	60	16	175	28	D1 or A1	PUSH-PULL	1-400MHz	6+6	70
DMD1029	350	60	16	175	28	D1 or A1	PUSH-PULL	1-400MHz	7+7	70
DMD1037	140	50	13	175	28	D2 or A2	SINGLE-ENDED	1-175MHz	7	70
DMD5010	125	60	13	400	50	D1 or A1	PUSH-PULL	1-500MHz	4+4	125
DMD5012	100	65	15	500	50	D1 or A1	PUSH-PULL	1-500MHz	3+3	125
DMD5028	300	60	20	175	50	D1 or A1	PUSH-PULL	1-400MHz	6+6	125
DMD5029	350	60	20	175	50	D1 or A1	PUSH-PULL	1-400MHz	7+7	125

New Packaging Technology

- * BeO free
- * Lower Thermal Impedance
- * Lower Source inductance
- * Higher Gain

D1 and A1 Package



D2 and A2 Package





Worldwide RF Sales Representatives

North America

USA

Richardson Electronics Ltd
40W267 Keslinger Road PO Box 393
LaFox IL, 60147-0393
Tel: (630) 208-2200
Fax: (630) 208-2550

South America

Brazil

Richardson Electronics do Brazil, Ltd.
Rua Antonio das Chagas, 1426
04714-002 Sao Paulo-SP
Tel: +55 (11) 5186-9655
Fax: +55 (11) 5186-9678

Mexico

Richardson Electronics Sa de CV
Av. Mariano Otero No1. 1901 Int. 103-104
Res. Victoria Guadalajara Jalisco 44550
Tel: +52 33 31230041
Fax: +52 33 31220565

Europe

Europe Benelux

Richardson Electronics Benelux BV
Kruisweg 789-799, Building 5
2132 NG Hoofddorp
Tel: +31 (0) 23 5560490
Fax: +31 (0) 23 5560491

Denmark

Sangus-Richardson AB
Baldersbuen 15H
2640 Hedenhusene
Tel: +45 46555630
Fax: +45 46555631

France

Richardson Electronique Snc.
46 Avenue Kleber
Colombes Cedex 92706
Tel: +33.1.55.66.00.30
Fax: +33.1.55.66.00.31

Germany

Richardson Electronics GmbH
Zeppelinstrasse 2
Puchheim D-82178
Tel: +49 (89) 890 214-0
Fax: +49 (89) 890 214-90

Italy

Richardson Electronics S.r.l.
Viale L. Ariosto, 492/G
Sesto Fiorentino (FL) 50019
Tel: +39 (055) 42.08.31
Fax: +39 (055) 421.07.26

Spain

Richardson Electronics Iberica S.A.
Calle Hierro 33
1a Planta Nave
10 Edificio Legazpi
Madrid 28045
Tel: +34 (91) 528-3700
Fax: +34 (91) 467-5468

Sweden

Sangus-Richardson AB
Girovagen 13, 1tr
JARFALLA 175 62G22
Tel: +46 8 564 705 90
Fax: +46 8 760 4663

UK

Richardson Electronics Limited
226 Berwick Avenue
Slough, Berks. SL1 4OT
Tel: +44 (01753) 733010
Fax: +44 (01753) 733012

Russia

Petro-Intrade
ENGELSRA STR 71
ST PETERSBURG 194214
Tel: 007 812 3246350
Fax: 007 812 3246350

Russia

Elcotech
Rdaio str12, building 2
Moscow 105005
Tel: 095 755 88 15
Fax: 095 755 88 14

Russia

Apex
53 Sherbakovskaya st.
Moscow
Russia
105318
Tel: +7 095 9758292
Tel: +7 095 3663867
Fax: +7 095 3661274

Middle East

Israel

EDE Electronics Ltd
Po Box 431
Evan-Yahuda 40500
Tel: +972 9 899 7816
Fax: +972 9 899 8228

Africa

South Africa

ECS(Pty) Ltd.
P.O.Box 2167 Halfway House
1685 South Africa
Tel: +27 11 808 4272
Fax: +27 11 805 2119

Asia

China

Richardson Electronics China
Room 1118, Union Plaza
No. 20 Chaoyangmenwai Street
Chaoyang District
100020 Beijing
Tel: 86-10-65885548
Fax: 86-10-65885541

China

Tangram Electronic Engineering Co. Ltd
339 North Building,
Ying Wu Conference Centre
No. 6 Hua Yuan Road, Haidian District
Beijing 100088
Tel: 86 10 6206 1101
Fax: 86 10 6206 1100

China

Eastern Technology Development Company
Flat 7
Thriving Industrial Center
26-38 Sha Tsui Road
Tsuen Wan
Hong Kong
Tel: 852-2413 3813
Fax: 852-2413 2601

China

Wellking Xi'an
Sino Finet International Business Centre
Rm.A-7C, No.21, West of Nanerhuan
Ro. Shaanxi, 710061, P.R.C
Tel: 86-29-85269988
Fax: 86-29-85262728

Pacific Rim

Australia

Richardson Electronics Pty Ltd
ABN 19 069 808 108
Unit 23
10 Gladstone Road
Castle Hill NSW 2154
Tel: +61 1300 882 819
Fax: +61 (02) 9894 7481

Japan

Richardson Electronics KK
Sumitomo Fudousan Hongo Building
3-22-5, Hongo, Bunkyo-ku
113-0033 Tokyo
Tel: +81 (3) 5844-0521
Fax: +81 (3) 5844-0527

Korea

Richardson Electronics Korea Ltd.
7F, Yesung B/D
150-30 Samsung-Dong,
Kangnam-Ku
Seoul 135-090
Tel: +82 2 539-4731
Fax: +82 2 539-4730

Korea

K-Tek Korea Inc.
Room 407, Joongang Building
44-26 Yoido Dong
Youngdeungpo-Ku
Seoul 150-010
Tel: +82 2 761 4745
Fax: +82 2 783-2351

Malaysia

Richardson Electronics
No. 5B, Worldwide Business Park
Block 1,
Jalan Tinju 13/50 Seksyen 13
40675 Shan Alam Selangor
Tel: 603-5511-5421
Fax: 630-5511-5423

Singapore

Richardson Electronics Pte., Ltd.
73 Upper Paya Lebar Road
Centro Bianco #04-01
534818 Singapore
Tel: +65 487 5995
Fax: +65 487 5665

Taiwan

Richardson International, Inc.,
FL 17-1, No 77
Hsin-Tai 5 Rd. Sec 1
Hsihjr City,
Taipei Hsien 221
Tel: +886 (2) 2698 3288
Fax: +886 (2) 2698 3285

Thailand

Richardson Electronics (Thailand), Ltd.
555/13-14 Unity Tower,
1st Fl Sukhumvit
103 Road Bangchak
Phrakhanong
Bangkok 10260
Tel: +66 (2) 749-4402
Fax: +66 (2) 749-4403

Vietnam

Richardson Electronics, Ltd.
Representative Vietnam Office
Suite #206-207, Tecasin Business Center
243-243B Hoang Van Thu Street,
Dist. Tan Binh
Ho Chi Minh City
Tel: +84 89974245
Fax: +84 89974071

Semelab Plc
Coventry Road,
Lutterworth,
Leicestershire. LE17 4JB
UK

Tel: +44 (0) 1455 556565
Fax: +44 (0) 1455 552612
Email: sales@semelab.co.uk

Web: www.semelab.co.uk
www.semelab.com