

LED Lighting and Supercapacitors

Introduction

Light emitting diodes, or LEDs, have come to prominence in recent years in conventional lighting applications including flashlights, street lamps, traffic lights and emergency lighting. Their advantages over incandescent and compact fluorescent light sources include greater robustness, higher energy efficiency and a longer lifetime. Due to the constantly falling prices of LEDs, they are also now becoming more economical in the long term than traditional light sources.

With the luminous efficiency of LEDs undergoing exponential growth in recent years, modern LEDs are the most energy efficient form of lighting that is generally available. Typical efficiencies and lifetimes for LEDs compared to other light sources are shown in Figure 1.

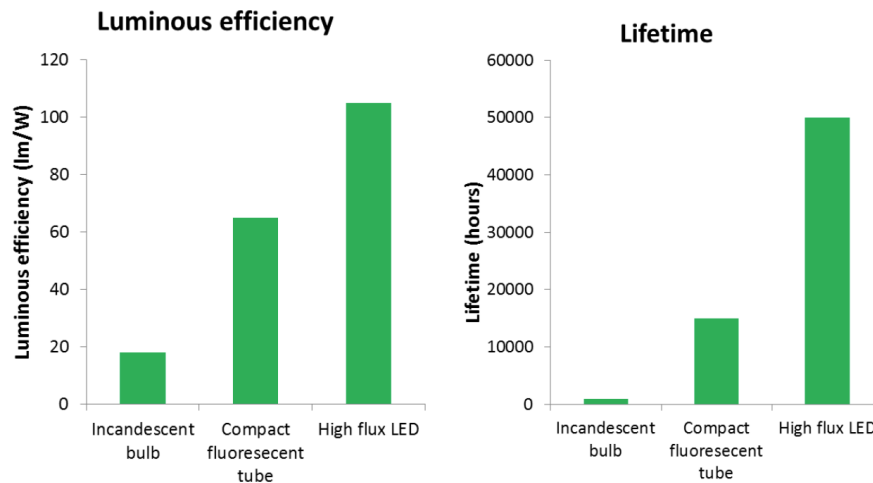


Figure 1: Luminous efficiency and lifetime of LEDs compared to other common light sources.

LEDs with a luminous efficiency above 100 lumens per watt are now in mass production and are being used, for example, in street lamps. This is a major improvement even since 2009, when 50 lumens per watt was considered as cutting-edge efficiency. The dramatically low energy required to power LEDs makes them perfect candidates for supercapacitor powered illumination devices. The lifetime of LEDs is very high, in the tens of thousands of hours at a minimum. The price of LEDs has also declined significantly in recent years, and this trend is forecasted to continue as production volumes and efficiency improve. As countries continue legislation to phase-out incandescent bulbs, it is expected that LEDs will gradually fill a portion of the vacancy created which will further promote price reductions.

Supercapacitors are long lifetime, high power devices that store relatively little energy compared to a battery. The low power requirements of LEDs means that a reasonably sized supercapacitor power source can still provide several hours of lighting on a single charge, while the long lifetime and low-temperature performance advantage over batteries is maintained. The emergence of 3.0 V supercapacitor cells, as well as hybrids, only strengthens the case for their use in LED applications, due to the higher amount of energy stored in these new supercapacitor types. Supercapacitors are also free of lead, mercury, and cadmium, which eases any environmental concerns that may arise over the course of their long term use and eventual disposal/recycling.

Background

LEDs contain a semiconducting material that emits light in a process known as electroluminescence. The process can be thought of as the direct conversion of electrical energy to light energy in the visible spectrum. In the case of incandescent lights, electric energy is used to heat a filament until it is glowing hot and emits light over a broad spectrum of visible and infrared light. In the case of fluorescent lights, toxic mercury vapor is excited by electrical discharge to emit short wave ultraviolet light which strikes a phosphor coating on the bulb to fluoresce visible light.

LEDs typically require a constant current for constant light output operation. Power supplies, or drivers, are required to maintain the non-linear voltage-current relationship of LEDs. Driver energy efficiencies are on the order of 85%, which slightly impacts the overall energy efficiency of an LED device. The load on the driver is an important factor here, as the driver will reach maximum efficiency when it is being used at its full power. A well designed driver is critical, not only for energy efficiency, but also for lifetime. A poorly designed driver can potentially have a shorter lifetime than the LED itself.

LEDs are typically rated for an ambient temperature of 25°C. At higher temperatures, their efficiency begins to decrease, while the opposite is true at lower temperatures. For outdoor, nighttime applications, the efficiency of LEDs can be greater than the manufacturer specified efficiency due to cooler temperatures. Thermal management is also important in maximizing the lifetime of the LED. All high luminosity LED devices employ some kind of heat dissipation hardware, often just a simple aluminum heat sink. Although it will reduce the light output, a lower input current to the LED will result in less heating and a longer lifetime.

Supercapacitors have a linearly sloping voltage profile during charge and discharge. Because modern power electronics are only capable of harnessing the output of a cell down to about half of its rated voltage, it should be expected that in a LED application the full energy capacity of the supercapacitor would not be accessed. The driver supporting the LED would preferably be designed to provide a non-varying power input to the LED if a steady light output is desired. The energy stored in a supercapacitor is given by the equation $E = 1/2CV^2$, where C is capacitance and V is voltage. By discharging to half of the rated cell voltage, 75% of the cell's energy is utilized.

Applications

Supercapacitors are the perfect power source for a number of LED lighting applications. Figure 2 shows the nominal runtime of an LED device over a range of lumen output levels and supercapacitor capacitances. Examples of emerging LED-supercapacitor applications are discussed below.

Handheld Flashlights and Lanterns

Imagine a rechargeable handheld flashlight that gives two hours of reliable operation, that can be charged in 90 seconds, and that works as well at -40°C as it does at room temperature. The combination of modern efficient LED technology and supercapacitors has made this kind of device a reality. The energy efficiency and greater shock resistance of LEDs compared to incandescent bulbs has already led to their incorporation in most flashlights available today. By using supercapacitors to power a flashlight, the user is relieved from the nuisance of having to replace or slow-charge batteries. Combined emergency type radio-flashlights are also potentially low enough in their energy requirement to allow the use of supercapacitors as a power source. In this application, the lifetime, fast charge and reliability of supercapacitors is especially attractive.

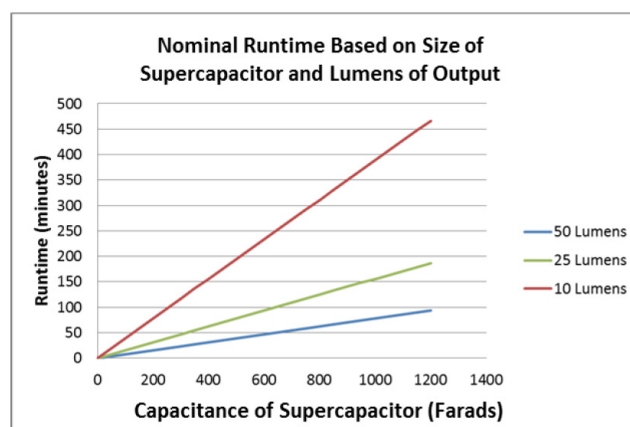


Figure 2: Runtime vs. capacitance for different LED lumen outputs. This assumes that the supercapacitor is rated to 2.7 V and discharged to 1.35 V, an LED efficiency of 100 lumens per watt and a driver (power supply) efficiency of 85%.

Solar Powered Outdoor Lighting

LEDs, supercapacitors and solar panels are all long lifetime devices. Unfortunately, solar power has always required batteries. The need to periodically replace the batteries in off-grid solar systems has discouraged the adoption of solar technology in numerous areas. However, if supercapacitors are used as an energy storage medium, the cost and inconvenience of battery replacement is removed. Because supercapacitors store a relatively small amount of energy, they are most suitable when the energy demand of the system in question is relatively low.

Solar powered LED lights are a perfect example of the harmonious coupling of solar, LED and supercapacitor technologies. The solar panel uses energy from the sun to charge the supercapacitor during the day, and at night a photo sensor switches on the LED to provide illumination, either temporarily or throughout the night. Even if outside temperatures drop to -40°C, the ability of the supercapacitor to provide power to the LED will not be noticeably compromised, unlike a battery. A supercapacitor cannot be over discharged like batteries can, so there is no damage to them if they remain at a low state of charge for a long period of time. Because there is no incandescent or fluorescent bulb and no battery to curtail the lifetime and performance of the device, the last remaining deterrent to solar technology adoption is removed. Garden lights, illuminated signs, navigational aids, pavement lights, traffic signals and street lights are all potential applications of this technology.

Emergency Interior Lighting

Emergency lighting is installed in buildings to provide temporary illumination in the event of a power outage. The replacement of batteries in these systems is a constant expense for building maintenance. By using LEDs as a low power light source and supercapacitors as the energy storage medium, the servicing requirements for such units can be reduced dramatically, saving money and time for building managers.

Conclusion

Supercapacitors and LEDs exhibit several properties which are complimentary, allowing them to be harmoniously coupled in several applications. Supercapacitors are low energy density devices, while LEDs require very little energy to operate. Both LEDs and supercapacitors are long lifetime devices. Of all electrical light sources, LEDs are best suited for operation at cold temperatures, which is also true of supercapacitors with regard to power sources. Both supercapacitors and LEDs have experienced dramatic price reductions thus, contemporaneously maturing as economical green technologies.

About KEMET

KEMET Corporation is a leading global supplier of electronic components. We offer our customers the broadest selection of capacitor technologies in the industry, along with an expanding range of electromechanical devices, electromagnetic compatibility solutions and supercapacitors. Our vision is to be the preferred supplier of electronic component solutions demanding the highest standards of quality, delivery and service.

For more information on this product go to
<http://www.kemet.com/an1004> or scan the QR code:

