
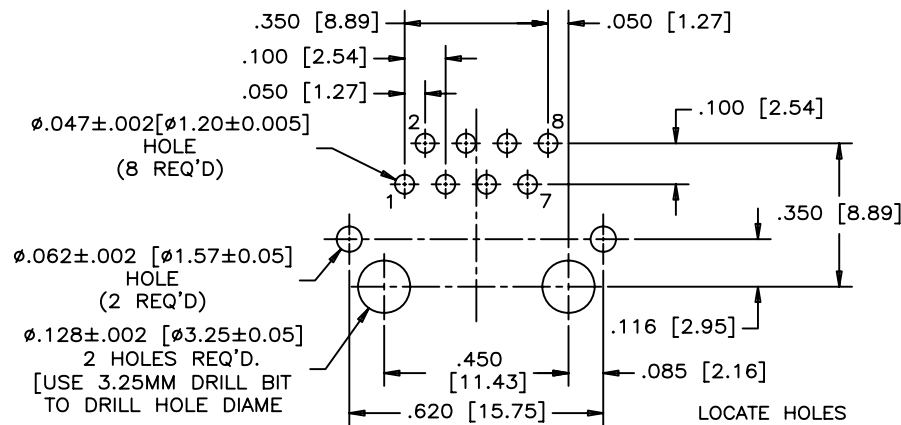
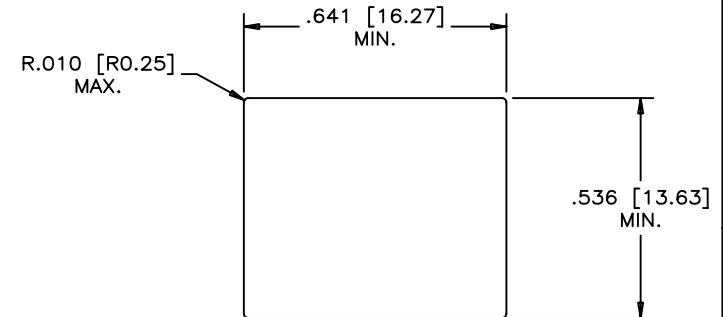
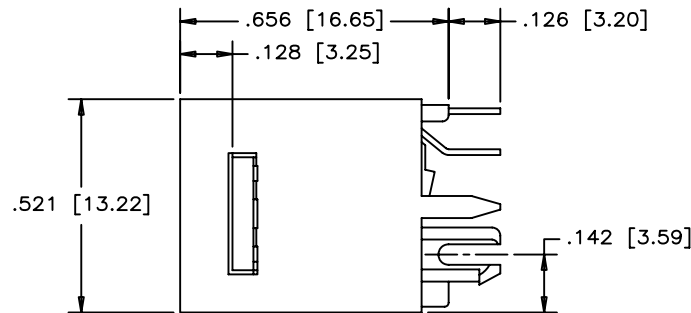


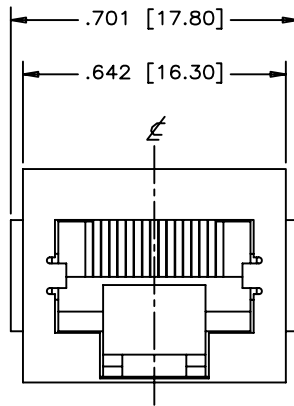

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES
[Ø.005 [0.13]]
HOLE POSITIONS
ARE BASIC

MATERIALS:

HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL94V-0
COLOR: BLACK

CONTACTS: PHOSPHOR BRONZE

PLATING: REFER TO PART NUMBER FOR GOLD THICKNESS
ON MATING SURFACE
50 MICROINCH [1.27 MICRONS] MIN. NICKEL OVERALL
100 MICROINCH [2.54 MICRONS] MIN. MATTE-TIN
OR GOLD FLASH OVER TAIL

SHIELD: COPPER ALLOY WITH NICKEL PLATED

PART NUMBER: R J E 0 6 - 1 8 8 - 1 X 2 0

SERIES 1 PORT NO. OF POSITIONS NO. OF CONTACTS

STANDARD WITH FLANGE GOLD PLATING
1 = 6 MICROINCH
2 = 15 MICROINCH
3 = 30 MICROINCH
4 = 50 MICROINCH
FULL SHIELD

DRAWN PAULW	DATE MAY15/06
DESIGNED	
CHECKED CHIGOW	MAY15/06
I. E. APPRD.	
Q. A. APPRD.	
DWG. APPRD.	
ENG. REL. NO.	
REF. EAR # A060504	
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554

Amphenol Canada Corp.

TITLE RJE06 SERIES, 8 POSITION
8 CONTACT, VERTICAL MOUNT,
WITH SHIELD, AND FLANGE
- RoHS COMPLIANT

DWG	DRAWING NO.	REV.
	P-RJE06-188-1X20	C
SCALE	WT.	SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.