

## Technical data sheet

Power supply · Compact 3-phase, 960 W

---

Primary switchmode power supply, PFC, 3-phase

Input: Wide range input AC 340 - 550 V

Output: DC 48 V, 20 A



---

### Identification

---

Type CPSB3-960-48  
Part No. [722812](#)

---

### Product version

---

Datasheet version 00

---

### Input

---

Number of phases 3  
Rated voltage  $U_N$  3 × AC 400–500 V  
Operation voltage range AC 340–550 V / DC 520–725 V  
Frequency range 47 Hz – 63 Hz  
Rated current  $I_N$  2.4 A @ AC 400 V / 2.1 A @ AC 500 V  
Inrush current ≤50 A / 1.86 A<sup>2</sup>s  
External protection Mini-circuit breaker: 3 × C 10 A / safety fuse: 3 × T 10 A (required)  
Power factor correction P.F.C. >0.7

---

### Output

---

Output voltage/current DC 48 V/20 A  
Rated voltage  $U_N$  DC 48 V  
Rated current  $I_N$  20 A  
Max. output current (limited current) 22 A  
Max. output current (HICCUP, 5 sec) 30 A  
Power Dissipation <78 W  
Setting range  $U_{out\ min.}/U_{out\ max.}$  45-55 V  
Load regulation ≤0.5 %

---

#### United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk

#### Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt  
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)  
www.luetze.de • info@luetze.de

10.06.2022 • Subject to technical modification

Part No. [722812](#) • Datasheet version: 00

page 1 of 4

## Technical data sheet

### Power supply · Compact 3-phase, 960 W

---

Ripple and noise	<150 mV pp
Hold up time	>15 ms
Parallel / redundant mode	Max. 2 devices / via external decoupling diodes e.g. 722999
Efficiency	>92.5 %
Over voltage protection	≥DC 68 V
Rated over load protection	> 90°C, auto-reset
Short circuit	Adjustable: Hiccup, current limiting (C.C. Modus)

---

#### Status indication

---

Status indication DC ON LED green	≥43.2 V
Status indication DC LOW LED red	≤43.2 V

---

#### Monitoring

---

DC ON Control (Rdy)	N/O contact
Switching voltage	AC 300 V / DC 150 V
Switching current	AC/DC 1 A
Switching capacity	300 VA / 30 W
Isolation voltage	AC 500 V

---

#### General

---

Switching frequency	Approx. 70 - 110 kHz
Insulation voltage input / output	DC 4.2 kV
Insulation voltage input / ground	DC 2.2 kV
Insulation voltage output / ground	DC 750 V
Derating	>45 °C: -15 W/°C
Cooling	Air convection, forced cooling >50°C, 50 mm distance top/bottom
Housing material	Aluminum
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Vertical
MTBF	>500000 h: SN29500 / >500000 h: MIL HDBK 217F
Degree of protection	IP20 (IEC 529 / EN 60529)
Protection class	I
Weight/unit	1.3 kg
Connection type	Screw terminal 0.20 mm <sup>2</sup> – 6.0 mm <sup>2</sup> max. 0.62 Nm
Dimensions (w × h × d)	80.0 mm × 127.0 mm × 137.5 mm
PU (units)	1

---

#### General ambient conditions

---

Operation temperature range	-40 °C ... +70 °C (UL approved up to +45 °C)
Storage temperature range	-40 °C ... +80 °C
Over voltage category	III
Degree of pollution	2

---

## Technical data sheet


### Power supply · Compact 3-phase, 960 W

Relative air humidity	5 – 95 % RH, non-condensing
Vibration resistance	5 – 17.8 Hz: $\pm 1.6$ mm, 17.8 – 500 Hz: 2 g 2 hours/axes X,Y,Z, IEC 60068-2-6
Shock resistance	30 g 6 ms, 20 g 11 ms, 3 shocks/direction, 18 shocks in total, IEC60068-2-27


### Certifications/Standards

Certifications	CE UKCA cULus (E249179)
Standards	UL 508 IEC/EN 61010-1 IEC/EN 61010-2-201 IEC/EN 60950 EN 55011 (CISPR11) Class A EN 55022 (CISPR22) Class A EN 61000-4-2 Level 3 EN 61000-4-3 Level 3 EN 61000-4-4 Level 4 EN 61000-4-11 Level 2 IEC 60068-2-6 (Vibration sinusoidal), 5-17.8 Hz: $\pm 1.6$ mm, 17.8-500 Hz: 2 g 2 hours / axis (X,Y,Z) IEC 60068-2-27 (Shock), 30 g 6 ms, 20 g 11 ms, 3 bumps / direction, 18 bumps total


### Dimensions

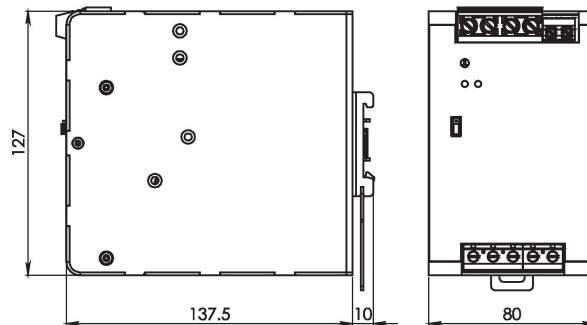

### PIN assignment

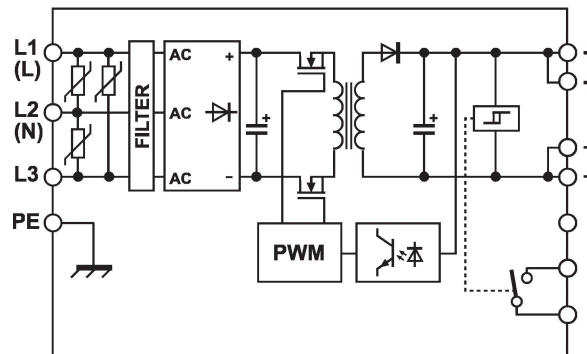

Derating

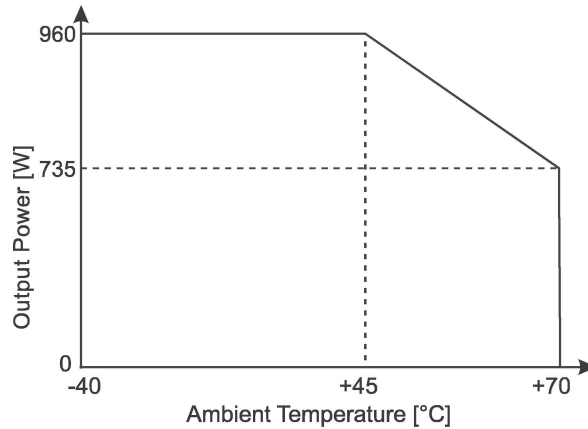


Short circuit characteristics

Limitation output characteristic

Hiccup

C.C.

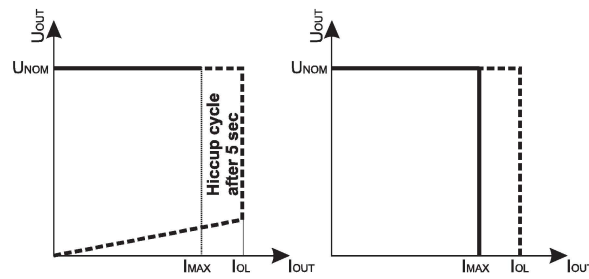

Short circuit conditions

