


TNC CABLE ASSEMBLIES

Amphenol Connex TNC Cable Assemblies utilize TNC connectors on both ends. TNC connectors are the same physical size as BNC connectors, but feature a threaded coupling mechanism. The 50 Ohm assemblies function up to 11 GHz while the 75 Ohm assemblies function up to 3 GHz. These assemblies are often used in commercial and military antenna applications. Standard lengths are 6, 12, 18, 24, 36, and 48 inches, and custom lengths may also be available. Heat shrink representation may vary.


TNC STRAIGHT PLUG TO TNC STRAIGHT PLUG CABLE ASSEMBLIES

Part Number	Cable Type	Connector 1	Connector 2	Impedance
125101-01-XX.XX	RG-316/U	122116	122116	50 Ohm
125101-04-XX.XX	RG-58/U	122108	122108	50 Ohm

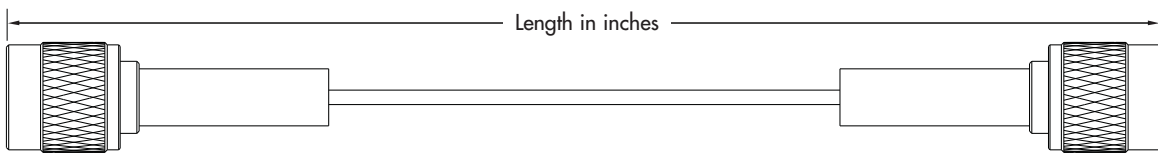

TNC STRAIGHT PLUG TO TNC RIGHT ANGLE PLUG CABLE ASSEMBLIES


Part Number	Cable Type	Connector 1	Connector 2	Impedance
125103-01-XX.XX	RG-316/U	122116	122148	50 Ohm
125103-04-XX.XX	RG-58/U	122108	122140	50 Ohm

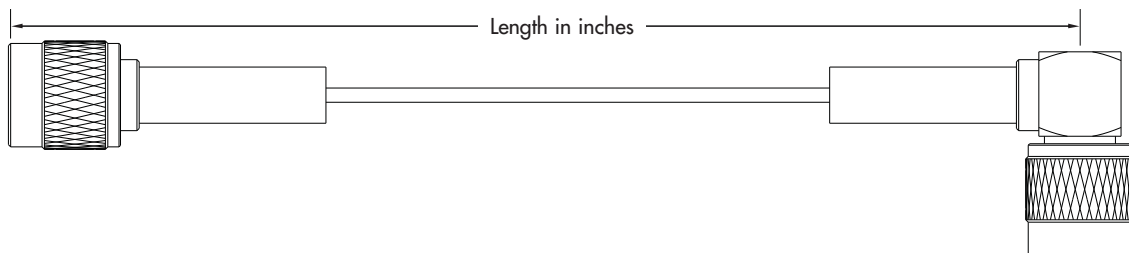

TNC CABLE ASSEMBLIES


TNC RIGHT ANGLE PLUG TO TNC RIGHT ANGLE PLUG CABLE ASSEMBLIES

Part Number	Cable Type	Connector 1	Connector 2	Impedance
125104-01-XX.XX	RG-316/U	122148	122148	50 Ohm
125104-04-XX.XX	RG-58/U	122140	122140	50 Ohm

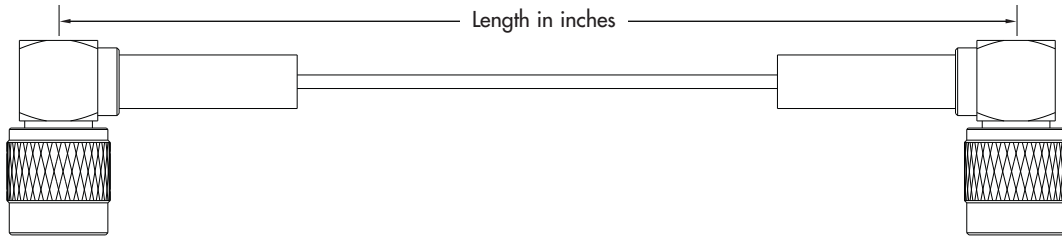

TNC STRAIGHT PLUG TO TNC BULKHEAD JACK CABLE ASSEMBLIES

Part Number	Cable Type	Connector 1	Connector 2	Impedance
125110-01-XX.XX	RG-316/U	122192	122116	50 Ohm
125110-04-XX.XX	RG-58/U	122160	122108	50 Ohm

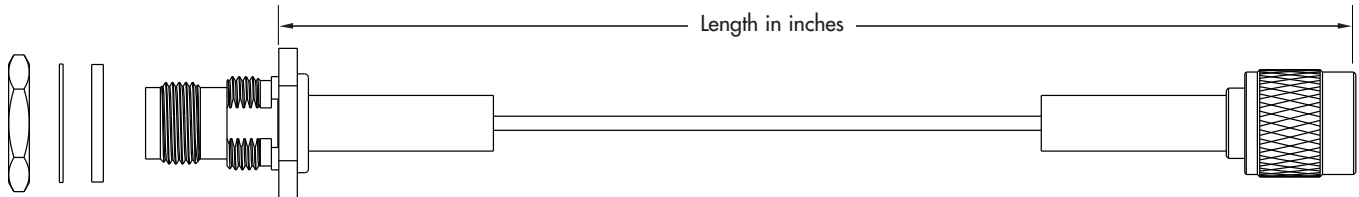

TNC RIGHT ANGLE PLUG TO TNC BULKHEAD JACK CABLE ASSEMBLIES

Part Number	Cable Type	Connector 1	Connector 2	Impedance
125111-01-XX.XX	RG-316/U	122192	122148	50 Ohm
125111-04-XX.XX	RG-58/U	122160	122140	50 Ohm

