

SINGLE-PAIR ETHERNET (SPE) CONNECTOR

T1 Industrial Jack & Cable IP20: 6780-000



As the Industrial Ethernet market continues to grow, the market keeps looking for smaller and faster connectors to fit their needs. As a result, Single Pair Ethernet has been driven to the forefront of discussion. Single Pair Ethernet (SPE) describes the transmission of Ethernet over only one pair of twisted copper wires. In addition to data transmission via Ethernet, SPE also enables a simultaneous power supply of terminal devices via PoDL – Power over Data Line. Previously, this required two pairs for Fast Ethernet (100MB) and four pairs for Gigabit Ethernet. In addition to space and weight savings with less wire, SPE transmits 1 GBit/s up to a distance of 40 meters. KYOCERA AVX is a part of the SPE Industrial Partner Network and will offer SPE products to meet the customer and market needs while meeting the standards according to IEC 63171-6 and IEEE 802.3 etc.

As a member of the SPE Industrial Partner Network, KYOCERA AVX will be actively involved in the continuing development of single-pair Ethernet (SPE) standards and compatible connectivity products, and will also serve as an ambassador of the significant space- and weight-saving advantages that SPE offers for applications including industrial, process, and building automation systems, smart city networks, and transportation systems.

APPLICATIONS

- Robotics
- Automation
- Sensor & actuator networks
- Control & monitoring cameras
- Smart grid
- Traffic control
- Transportation Smart Monitoring
- Product Notes: refer to 210-01-253
- Application Notes: refer to 210-01-254

FEATURES AND BENEFITS

- Improved performance over one single twisted pair of wires
- Simplified networks, eliminated gateways
- Industry standard acc. IEC 63171-6
- Transmission speeds from 10Mbit/s to 1Gbit/s
- Transmission ranges up to 1000 meters
- Reliable cold welded KYOCERA AVX IDC technology for signal wires for simple assembly process and easier automation of cabling process
- SMT solder tails for signal wires connection to the PCB

ELECTRICAL

- Current rating: 4A @60°C
- Voltage rating: 60V DC
- Voltage proof: 1000V DC (contact to contact) & 2250V DC (contact to shield)

ENVIRONMENTAL


- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +60°C
- IP degree protection: IP20

MECHANICAL

- Mating force: 20N max
- Durability: 1000 cycles / MPL1000
- Polarization force: 50N min
- Pull out force: 50N min

SPE IP20 Product performances comply with IEC 63171-6 requirements

HOW TO ORDER – T1 INDUSTRIAL JACK IP20

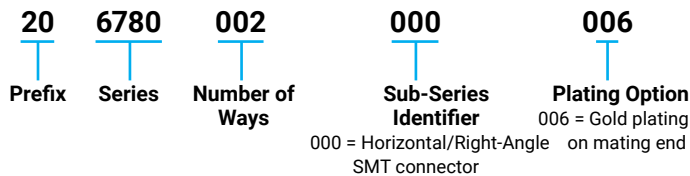

SALES DRAWINGS
CLICK TO DOWNLOAD

HOW TO ORDER – T1 INDUSTRIAL CABLE ASSEMBLY IP20



Code	Application	Tolerance (mm)
010	1 Meter	+40/-0
030	3 Meters	+40/-0
050	5 Meters	+40/-0
100	10 Meters	+100

Other lengths available upon request



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.