

FOR MORE INFORMATION

Technical Support

Internet:	www.te.com/ADM
USA:	+1 (800) 522-6752
Canada:	+1 (905) 470-4425
Mexico:	+52 (0) 55-1106-0814
C. America:	+52 (0) 55-1106-0814
South America:	+55 (0) 11-2103-6000
Germany:	+49 (0) 6251-133-1999
Great Britain:	+44 (0) 8706-080208
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

Follow us on Twitter for all the latest product news @TEConnectivity, and on Facebook, TEConnectivity.



Introducing Raychem Custom Shipboard Cables

www.te.com/ADM

© 2012 Tyco Electronics Corporation. All Rights Reserved.

7-1773447-2 ADM/RRD 5M 01/2012

Raychem, ZEROHAL, TE Connectivity and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies.

Other products, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information herein, nothing herein constitutes any guarantee that such information is error-free, or any other representation, warranty or guarantee that the information is accurate, correct, reliable current. The TE entity issuing this publication reserves the right to make any adjustments to the information contained herein at any time without notice. All implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose are expressly disclaimed. The dimensions herein are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.



KEY FEATURES

Water-blocked cables are available using tapes and yarns vs. silicone, which improves size and flexibility

Low smoke, zero halogen jackets compliant with current MIL Spec applications

Small order quantities available on most designs

Lightweight state-of-the-art cable insulation technology

TE design specialists can work directly with customers

RoHS compliant materials



DESCRIPTION

TE offers a full range of customized shipboard cables that can save users time, money and weight by packaging multiple cables into a single zero-halogen jacket per MIL-DTL-24640 specification.

APPLICATIONS

Cables can be used for a variety of applications including control, lighting, signal and power

Consolidation of individual cables for various applications including weapons systems

Data and power cables can be combined in the same bundle to decrease weight and size on cable runs

STANDARDS & SPECS

Qualified source for MIL-DTL-24640/1 through /18 marine cables

Qualified source for AS81044/5 through /13 hook-up wire

Raychem Specification 345

PRODUCT OFFERING

Full range of custom cables

Prototype samples available upon request

MATERIALS

Low smoke cable jackets

Innovative tapes and yarns for water-blocked cables

Wide range of component choices (including multiple MIL Spec components)

Wide variety of cable jackets to meet most rigorous applications including:

- Flexibility
- Fluid resistance
- NBC (Nuclear, Biological and Chemical) resistance
- Zero halogen
- FAR Part 25 compliant

ELECTRICAL

Controlled-electrical, signal and power cable available in a single bundle


Optimized shielding capabilities for harsh EMI environment requirements

MECHANICAL

Rugged cable jacket designs available


Large array of materials to choose from for conductors, shielding, and jacket insulation

CABLE CONSTRUCTION

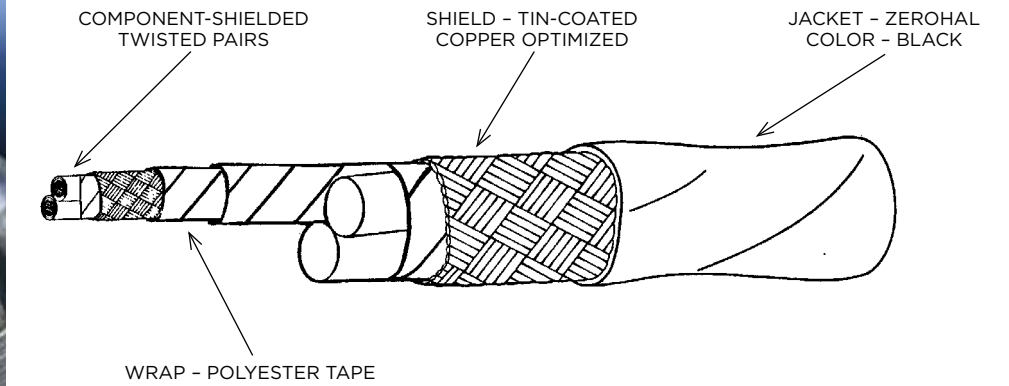

Cable Construction Details

Part No.	Conductor Size (AWG)	Type Number	Number of Pairs	Overall Shield Strand Size (AWG)	Diameter Over Shield (Nom)	Jacket Thickness (Min)	Cable Diameter		Cable Weight (lb/1000 ft, max)
							Min	Max	
345M09B-22-6	22	2XS0-3	3	32	.289	.038	.380	.410	117.0
345M09B-22-14	22	2XS0-7	7	32	.386	.041	.474	.510	184.0
345M09B-22-20	22	2XS0-10	10	32	.503	.044	.594	.640	262.0
345M09B-22-28	22	2XS0-14	14	34	.547	.044	.636	.686	301.0
345M09B-22-38	22	2XS0-19	19	34	.615	.044	.709	.765	383.0
345M09B-22-60	22	2XS0-30	30	34	.781	.047	.869	.937	554.0

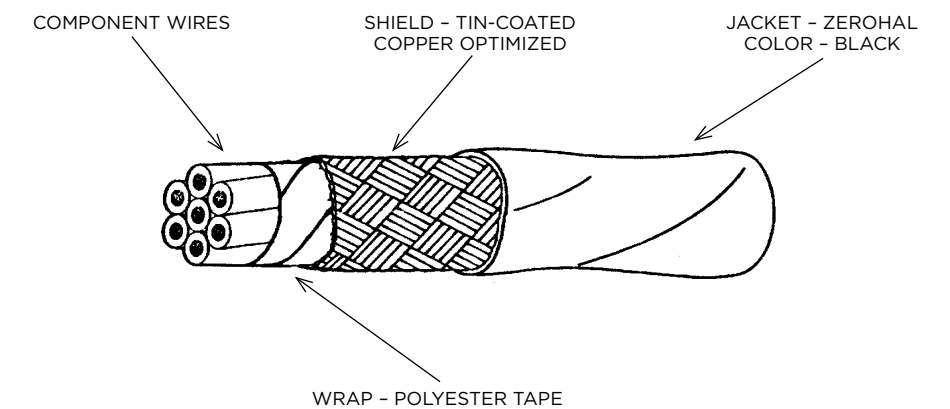

Cable Construction Details

Part No.	Conductor Size (AWG)	Type Number	Number of Pairs	Overall Shield Strand Size (AWG)	Diameter Over Shield (Nom)	Jacket Thickness (Min)	Cable Diameter		Cable Weight (lb/1000 ft, max)
							Min	Max	
345M10B-16-2	16	MXSO-2	2	30	.195	.034	.282	.304	76.4
345M10B-16-9	16	MXSO-9	9	32	.335	.041	.424	.458	180.0
345M10B-16-21	16	MXSO-21	21	32	.460	.044	.552	.596	329.0
345M10B-16-37	16	MXSO-37	37	34	.555	.044	.644	.694	497.0