

AMP Standard Terminals and Splices

Tyco Electronics

Our commitment. Your advantage.

Table of Contents

Product Facts

- Solderless terminals and splices performs up to today's standards for reliable termination in applications ranging from control circuits to heavy duty power wiring
- This catalog describes only standard terminals and splices accommodating wire sizes from 26 AWG through 4/0 AWG
- These terminals are pre-insulated and color coded by wire size for easy identification
- Funnel entry on many terminals allows for easy wire insertion for high speed production
- Nylon or vinyl insulation provides high dielectric strength
- The serration or dimple feature inside the terminal barrel provides exceptional barrel contact and tensile strength
- Special plating process creates a high resistance to corrosion
- Use of AMP application tooling is designed for uniform high quality terminations
- UL, CSA, Military Approved

Table of Contents

Introduction.....2, 3
Performance Specifications.....4, 5
Terminal Stud Hole Sizes.....6
PIDG (Pre-Insulated Diamond Grip).....7-32
Terminals.....8-30
Splices.....31, 32
PIDG FASTON.....33-36
Terminals.....34, 35
Splices.....36
PLASTI-GRIP.....37-52
Terminals.....38-49
Splices.....50-52
TERMINYL.....53-56
Terminals.....54, 55
Splices.....56
CERTI-SEAL.....57, 58
Splices and Tooling.....58
Class 1 and Class 2 Military Approvals.....59- 65
Tooling.....66-70
Part Numerical Index.....71-73
Global Contacts.....74

Numerical values

To convert U.S. customary unit values in this catalog to their metric equivalents, use the following formulas:

To convert from	to	Multiply by
inch	millimeter (mm)	2.540000 x 10
inch	metre (m)	2.540000×10^{-2}
inch	centimeter (cm)	2.540000
foot	metre (m)	3.0480000×10^{-1}
pound-force	newton (N)	4.448222
bar	pascal (Pa)	1.000000×10^{5}
pound-force/inch^2	pascal (Pa)	6.894757×10^{3}
pound-mass	kilogram (kg)	4.535924×10^{-1}
ounce-mass	kilogram (kg)	2.834952×10^{-2}

To convert wire size (AWG) to the equivalent metric value using the circular mil area of the wire, use the following formula:

circular mil area (CMA)/1550.003 = square millimeter (mm^2)

Note: Dimensions in this catalog are for reference purposes only. Customer drawings are available on request.

Specifications subject to change. Consult Tyco Electronics for latest design specifications.

Need more information?

Call Technical Support:
1-800-522-6752

The Center is staffed with specialists well versed in Tyco Electronics products. They can provide you with:

- Technical Support
- Catalogs
- Technical Documents
- Product Samples

©1977, 1980, 1982, 1985, 1986, 1988, 1995, 2000 and 2008 by Tyco Electronics Corporation. All Rights Reserved.

AMP, AMP-O-LECTRIC, AMPOMATOR, TETRA-CRIMP, AMP-TAPETRONIC, AUTO-PRO, CERTI-SEAL, DYNA-CRIMP, FASTON, PIDG, PLASTI-GRIP, PRO-CRIMPER, SHUR-PLUG, TERMINYL, T-HEAD, TE logo and Tyco Electronics are trademarks.

Terminals and Splices



PIDG Terminals and Splices Page 7
(Insulation Restricting Terminals also)



PIDG FASTON Terminals and Splices Page 33
(Insulation Restricting Terminals also)



PLASTI-GRIP Terminals and Splices Page 37



TERMINYL Terminals and Splices Page 53



CERTI-SEAL Splices Page 57

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Terminals and Spices (Continued)

Ordering Information

This catalog is designed for easy selection of terminal type to meet your needs. All terminals and splices are cataloged by tongue type and wire size.

If the part number is known, refer to the numerical index at the back of this catalog for page location of tabular information. In many instances the part is available in loose piece as well as tape mounted. FASTON terminals are available in strip form. When ordering tape mounted parts, specify the terminal or splice part number, the total quantity of parts required, the part number of the tooling to be used and the type of packaging desired (if applicable). The table shown at top right, lists the wire sizes available and the quantity per package for tape mounted and loose piece.

Insulated terminals and splices are color coded to indicate wire range and to help match the terminal with the appropriate tool. The table shown at right identifies the specific wire range insulation color.

Standard Packaging Quantities

Wire Size Range AWG	Packaging Quantity Loose Piece	Tape Mounted
26-22	1M/Box	2,500/Reel
22-14	1M/Box	5,000/Reel
16-14 H.D.	500/Box	2,500/Reel
12-10	500/Box	2,500/Reel
8 thru 4	100/Box	—
2 thru 4/0	50/Box	—

Note: Package quantities may vary with specific part numbers.

Insulation Color Code

Insulation Color Code	Wire Size Range AWG	Comments
Yellow	26-22	—
Transparent	24-20	—
Red	22-16	—
Blue	16-14	—
Yellow/Black	16-14	Heavy Duty
Yellow	12-10	—
Red	8	—
Blue	6	—
Yellow	4	—
Red	2	—
Blue	1/0	—
Yellow	2/0	—
Red	3/0	—
Blue	4/0	—

Terminals and Splices Performance Specifications

For detailed test information and product specifications, request appropriate report or refer to the applicable specification listed in the following table.

Product Type	Test Report Number	Application Specification
PIDG Terminals Nylon Insulation	501-31	MIL-T-7928
PIDG Insulation Restriction Terminals	GPR-575-69 110-236	MIL-T-7928/1
PIDG FASTON Terminals	—	UL310
PLASTI-GRIP Terminals	110-11514	UL486
TERMINYL Terminals	110-178	MIL-T-7928
CERTI-SEAL Terminals	—	—

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Terminal and Splices Performance Specifications (Continued)

The many millions of AMP terminals and splices that have given ten, fifteen and twenty years of service are ample proof of the testing and research that went into their design and manufacturing. Like all AMP solderless wiring devices, they are thoroughly tested to conform to standards of performance under heavy usage. Tests conducted in Tyco Electronics laboratories and research facilities, some of the best-equipped in their field, indicate that these terminals and splices meet or exceed applicable industrial requirements and military specifications. The result of some of the most popular tests are tabulated here.

Upon request, a formal test report will be supplied to support these values and document additional performance requirements not listed.

MIL-T-7928

Wire Size	Spec. Min. lb.	Group III Tensile Strength After Vibration - Lb.	Group VI Tensile Strength After Corrosion - Lb.
		Terminal Type	Terminal Type
		PIDG	PIDG
26	7	11.7	10.7
24	10	19.8	19.2
22	15	29.0	23.5
20	19	37.7	46.5
18	38	58.9	70.5
16	50	78.5	81.9
14	70	100	105
12	110	209	213
10	150	247	282
		TERMINYL	TERMINYL
8	225	299	310
6	300	600	609
4	400	784	835
2	550	1,035	1,136
1/0	700	1,781	1,767
2/0	750	1,787	1,721
3/0	825	2,845	2,880
4/0	875	3,048	3,268

MIL-T-7928

Wire Size	Specification Maximum Millivolt Drop[1]	Group II Millivolt Drop After Current Cycling[2]	Group III Millivolt Drop After Vibration[2]	Group VI Millivolt Drop After Corrosion[2]
		Terminal Type	Terminal Type	Terminal Type
		PIDG	PIDG	PIDG
26	9.2	3.2	3.1	3.3
24	7.9	2.6	4.9	2.9
22	9.0	4.5	3.8	6.0
20	7.5	3.6	3.8	3.6
18	7.2	3.1	3.6	3.1
16	7.7	3.6	3.7	3.9
14	7.7	3.7	4.0	3.6
12	8.4	4.0	4.6	4.2
10	7.5	3.3	3.6	3.3
		TERMINYL	TERMINYL	TERMINYL
8	5.2	3.7	3.8	4.2
6	5.7	4.3	4.1	4.1
4	5.4	4.1	4.0	4.1
2	5.5	4.2	4.2	4.2
1/0	6.8	4.4	4.3	4.4
2/0	6.7	4.2	4.2	4.2
3/0	6.3	4.2	4.1	4.1
4/0	6.4	4.0	4.1	4.1

[1]Value is millivolt drop permitted after test plus equal length of wire.
[2]Value includes equal length of wire.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Terminal Stud Hole Size

Use to Select Proper Size Terminal

The chart shows sizes and dimensions of various studs and the corresponding terminal stud hole sizes used with AMP devices.

For example, with stud #5 (.125 Diameter), use AMP device listed for #5 stud (.129 Hole Diameter).

Terminal stud hole sizes may easily be checked by fitting sample terminal to black circle.

Stud Size		Stud Dia.	Minimum Terminal Hole Diameter
U.S. Cust.	Metric		
#0		.060	.064
#1		.073	.077
#2	M2	.086	.090
#3		.099	.103
#4		.112	.116
#5	M3	.125	.129
#6	M3.5	.138	.142
#8	M4	.164	.168
#10		.190	.194
#12		.216	.220
#14		.242	.245
1/4″	M6	.250	.260
5/16″	M8	.312	.323
3/8″		.375	.385
7/16″		.437	.448
1/2″	M12	.500	.510

Stud Size		Stud Dia.	Minimum Terminal Hole Diameter
U.S. Cust.	Metric		
5/8″	M16	.625	.651
3/4″		.750	.776
7/8″	M22	.875	.901
1″		1.000	1.026
1 1/8″		1.125	1.151
1 1/4″		1.250	1.276

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices

Product Facts


- Pre-insulated terminal designed for uniform reliability in most difficult circuit environments
- PIDG Terminals consist of tin plated copper or tin plated phosphor bronze body for spring spades with a copper sleeve and insulation sleeve fitted over terminal barrel
- Design of the tool dies and construction of the terminal allows for uniform insulation thickness under crimping pressure, transmitting this pressure evenly to the center of the crimp area

The AMP Mated Tool/Terminal Concept

- AMP compression crimping produces crimps for a given size wire and terminal that are alike in appearance and performance
- Terminal and crimping tool are designed as uniform matched devices
- Dies are precision-engineered from the finest hard-metal alloys
- Crimping pressure is controlled by a ratchet device on the hand tool or a corresponding pre-calibration in the crimping jaws of AMP automated crimping machines

The Crimp

- When done properly, crimping pressure can neither overstress nor understress the terminal barrel—machined dies fully bottom to the precise crimp height
- Resulting termination is free of contamination
- Resistant to shock and critical environments
- Tensile strength approaches that of the wire itself
- PIDG Terminals meet or exceed the requirements of MIL-T-7928, Type II, Class 1 and 2
- Refer to AMP Qualified Products for Military Application, Catalog 73-159 for Military Specification Number to AMP Part Number cross reference

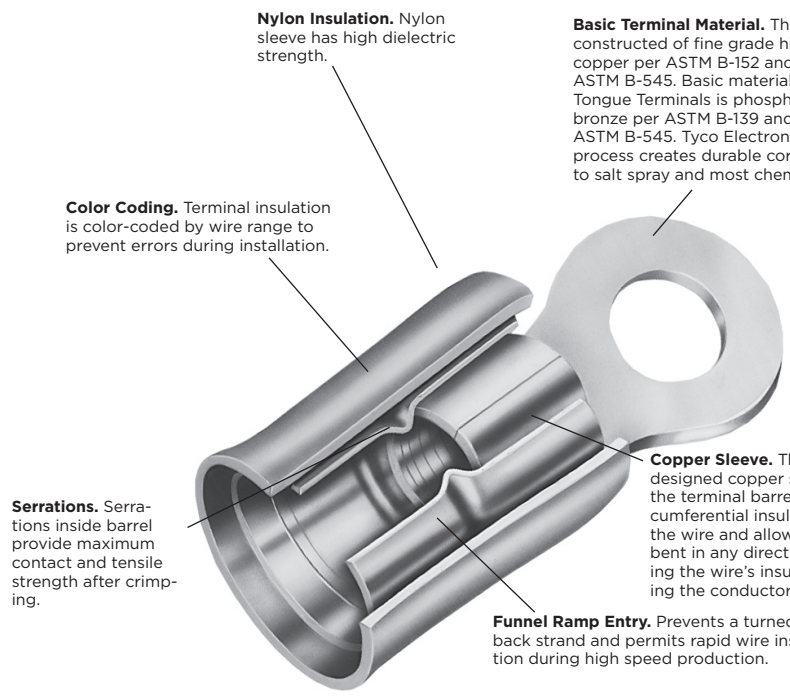

Temperature Rating: 105°C Max.

Note: Over size expansions are provided in vinyl insulation only.

AMP PIDG Terminals (Use PIDG Tooling)

AMP Wire Range	UL LISTED	CSA LR7189 Certified
22-16	22-16 Solid or Stranded	
16-14	16-14 Solid or Stranded	300 V Max., 105°C. Max.[1]
12-10	12-10 Solid or Stranded	

Note: 22-16 terminals are stamped 22-18 in accordance with MIL-T-7928.

[1]UL & CSA — Nylon

AMP PIDG Nylon Butt Window Splice (Use PIDG Tooling)

AMP Wire Range	UL LISTED	CSA LR7189 Certified
22-16	22-16 Stranded or Solid	
16-14	16-14 Stranded or Solid	300 V Max., 105°C. Max.
12-10	12-10 Stranded or Solid	

Note: 22-16 splices are stamped 22-18 in accordance with MIL-T-7928.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals



Material

Insulation-Nylon, UL 94V-2

Terminal Body and Metallic Sleeve-Copper per ASTM B-152

Plating-Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling -pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
26-24 238-475 [0.12-0.24]	**.029** 0.74	2 M2	**.203** 5.16	**.211** 5.36	**.632** 16.05	**.739** 18.77	Yellow	**.105** 2.67	54310-1†	—
		4	**.203** 5.16	**.211** 5.36	**.632** 16.05	**.736** 18.69	Yellow	**.105** 2.67	52189†	—
		6 M3.5	**.250** 6.35	**.243** 6.17	**.664** 16.87	**.792** 20.12	Yellow	**.105** 2.67	53073†	—
		8 M4	**.281** 7.14	**.250** 6.35	**.671** 17.04	**.814** 20.68	Yellow	**.105** 2.67	54311-1†	—
		10	**.312** 7.92	**.281** 7.14	**.702** 17.83	**.868** 22.05	Yellow	**.105** 2.67	54312-1†	54312-2†
26-22 202-810 [0.10-0.41]	**.020** 0.51	0	**.140** 3.56	**.121** 3.07	**.452** 11.48	**.525** 13.34	Yellow	**.082** 2.08	321013	—
		2 M2	**.140** 3.56	**.121** 3.07	**.452** 11.48	**.525** 13.34	Yellow	**.082** 2.08	323912*	2-323912-1
			.140 3.56	**.211** 5.36	**.542** 13.77	**.615** 15.62	Yellow	**.082** 2.08	329951*	—
			.165 4.19	**.211** 5.36	**.542** 13.77	**.617** 15.67	Yellow/Br.	**.082** 2.08	321620*	1-321620-0
			.203 5.16	**.211** 5.36	**.542** 13.77	**.646** 16.41	Yellow	**.082** 2.08	323913	2-323913-1
		4	**.203** 5.16	**.211** 5.36	**.542** 13.77	**.646** 16.41	Yellow	**.082** 2.08	323914*	2-323914-1
		6 M3.5	**.198** 5.03	**.308** 7.82	**.643** 16.33	**.745** 18.92	Yellow	**.082** 2.08	321617	—
			.203 5.16	**.211** 5.36	**.542** 13.77	**.646** 16.41	Yellow	**.082** 2.08	323915*	2-323915-2
			.250 6.35	**.281** 7.14	**.612** 15.54	**.740** 18.80	Yellow	**.082** 2.08	326875*	2-326875-1
		8 M4	**.250** 6.35	**.281** 7.14	**.612** 15.54	**.740** 18.80	Yellow	**.082** 2.08	323916*	2-323916-1
			.300 7.62	**.281** 7.14	**.612** 15.54	**.765** 19.43	Yellow	**.082** 2.08	52124	52124-2
		10	**.250** 6.35	**.281** 7.14	**.612** 15.54	**.740** 18.80	Yellow	**.082** 2.08	324075*	2-324075-1
			.300 7.62	**.281** 7.14	**.612** 15.54	**.765** 19.43	Yellow	**.082** 2.08	52124-1	—
24-20 320-1,290 [0.16-0.65]	**.025** 0.64	0	**.160** 4.06	**.125** 3.18	**.506** 12.85	**.589** 14.96	Natural	**.100** 2.54	—	2-328489-1
		2 M2	**.160** 4.06	**.125** 3.18	**.506** 12.85	**.589** 14.96	Natural	**.100** 2.54	329636	2-329636-1
		4	**.203** 5.16	**.250** 6.35	**.631** 16.03	**.735** 18.67	Natural	**.100** 2.54	50534	—
			.281 7.14	**.250** 6.35	**.631** 16.03	**.774** 19.66	Natural	**.100** 2.54	323985	—
		6 M3.5	**.281** 7.14	**.250** 6.35	**.631** 16.03	**.774** 19.66	Natural	**.100** 2.54	323986	2-323986-1
		8 M4	**.312** 7.92	**.281** 7.14	**.662** 16.81	**.821** 20.85	Natural	**.100** 2.54	323989	1-323989-0
		10	**.312** 7.92	**.281** 7.14	**.662** 16.81	**.821** 20.85	Natural	**.100** 2.54	323990	2-323990-1

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

†Must be crimped with 22-18 or 22-16 PIDG (red) Tooling.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals

(Continued)

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	1	**.160** 4.06	**.156** 3.96	**.560** 14.22	**.643** 16.33	Red	**.125** 3.18	327174	2-327174-1
		2 M2	**.182** 4.62	**.172** 4.37	**.576** 14.63	**.669** 16.99	Red	**.125** 3.18	324158	2-324158-1
			.182 4.62	**.172** 4.37	**.576** 14.63	**.669** 16.99	Red	**.140** 3.56	320773	—
			.218 5.54	**.156** 3.96	**.560** 14.22	**.672** 17.07	Red	**.125** 3.18	328657*	2-328657-1
		4	**.182** 4.62	**.172** 4.37	**.576** 14.63	**.669** 16.99	Red/Green	**.125** 3.18	327654*	—
			.182 4.62	**.172** 4.37	**.576** 14.63	**.669** 16.99	Red	**.140** 3.56	320882*	2-320882-1
			.218 5.54	**.156** 3.96	**.560** 14.22	**.672** 17.07	Red	**.125** 3.18	320553*	2-320553-2
			.218 5.54	**.156** 3.96	**.560** 14.22	**.672** 17.07	Red	**.125** 3.18	36254[1]	
			.218 5.54	**.156** 3.96	**.560** 14.22	**.672** 17.07	Red	**.140** 3.56	31880*	2-31880-1
			.218 5.54	**.156** 3.96	**.560** 14.22	**.672** 17.07	Black	**.140** 3.56	35229	—
			.250 6.35	**.312** 7.92	**.716** 18.19	**.844** 21.44	Red	**.125** 3.18	323758	2-323758-1
			.250 6.35	**.312** 7.92	**.716** 18.19	**.844** 21.44	Red	**.140** 3.56	330648	2-330648-1
		6 M3.5	**.218** 5.54	**.156** 3.96	**.560** 14.22	**.672** 17.07	Red	**.125** 3.18	36149*	2-36149-2
			.218 5.54	**.156** 3.96	**.560** 14.22	**.672** 17.07	Red	**.140** 3.56	36150*	2-36150-1
			.250 6.35	**.250** 6.35	**.654** 16.61	**.782** 19.86	Red	**.125** 3.18	51863*	51863-1
			.281 7.14	**.250** 6.35	**.654** 16.61	**.797** 20.24	Red	**.125** 3.18	36151*	2-36151-2
			.281 7.14	**.250** 6.35	**.654** 16.61	**.797** 20.24	Red	**.140** 3.56	36152*	2-36152-1
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.125** 3.18	323008	2-323008-1
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.140** 3.56	326878	2-326878-1
		8 M4	**.281** 7.14	**.250** 6.35	**.654** 16.61	**.797** 20.24	Red	**.125** 3.18	320554*	2-320554-1
			.281 7.14	**.250** 6.35	**.654** 16.61	**.797** 20.24	Red	**.140** 3.56	31886*	2-31886-2
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.125** 3.18	320551*	1-320551-1
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.140** 3.56	31890*	2-31890-1
			.344 8.74	**.297** 7.54	**.701** 17.81	**.876** 22.25	Red	**.140** 3.56	32835	2-32835-2
		10	**.281** 7.14	**.250** 6.35	**.654** 16.61	**.797** 20.24	Red	**.125** 3.18	320552*	2-320552-1
			.281 7.14	**.250** 6.35	**.654** 16.61	**.797** 20.24	Red	**.140** 3.56	31887*	2-31887-1
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.125** 3.18	36153*	2-36153-2
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.140** 3.56	36154*	2-36154-2
			.344 8.74	**.297** 7.54	**.701** 17.81	**.876** 22.25	Red	**.125** 3.18	32836*	—
			.344 8.74	**.297** 7.54	**.701** 17.81	**.876** 22.25	Red	**.140** 3.56	32837*	32837-1

*Available in small packaging quantities.

[1]Slightly larger than standard #4 stud hole. (.128 in./3.25 mm.)

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals

(Continued)



Material

Insulation-Nylon, UL 94V-2

Terminal Body and Metallic Sleeve-Copper per ASTM B-152

Plating-Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	1/4 M6	**.469** 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Red	**.125** 3.18	320571*	2-320571-2
			.469 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Black	**.125** 3.18	55936-1	55936-2
			.469 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Red	**.140** 3.56	31894*	2-31894-2
		5/16 M8	**.469** 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Red	**.125** 3.18	320572*	2-320572-1
			.469 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Red	**.140** 3.56	31895*	2-31895-1
			.531 13.49	**.546** 13.87	**.950** 24.13	**1.218** 30.94	Red	**.125** 3.18	324123	—
		3/8	**.531** 13.49	**.546** 13.87	**.950** 24.13	**1.218** 30.94	Red	**.125** 3.18	320573*	2-320573-4
			.531 13.49	**.546** 13.87	**.950** 24.13	**1.218** 30.94	Red	**.140** 3.56	31897*	2-31897-2
			.656 16.66	**.437** 11.10	**.841** 21.36	**1.171** 29.74	Red	**.125** 3.18	321522	—
		1/2 M12	**.713** 18.11	**.530** 13.46	**.934** 23.72	**1.293** 32.84	Red	**.125** 3.18	328975*	—
20-16HD[1] 992-2,800 [0.50-1.42]	**.042** 1.07	10	**.469** 11.91	**.312** 7.92	**.718** 18.24	**.955** 24.26	Blue	**.150** 3.81	150247	—
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	2 M2	**.180** 4.57	**.171** 4.34	**.575** 14.61	**.668** 16.97	Blue	**.170** 4.32	324993	—
		4	**.250** 6.35	**.171** 4.34	**.575** 14.61	**.703** 17.86	Blue	**.150** 3.81	324159*	2-324159-2
			.250 6.35	**.171** 4.34	**.575** 14.61	**.703** 17.86	Blue	**.170** 4.32	328996*	2-328996-1
			.250 6.35	**.281** 7.14	**.685** 17.40	**.813** 20.65	Blue	**.150** 3.81	323676	—
		6 M3.5	**.250** 6.35	**.171** 4.34	**.575** 14.61	**.703** 17.86	Blue	**.150** 3.81	320561*	2-320561-2
			.250 6.35	**.171** 4.34	**.575** 14.61	**.703** 17.86	Blue	**.170** 4.32	320619*	2-320619-1
			.250 6.35	**.281** 7.14	**.685** 17.40	**.813** 20.65	Blue	**.170** 4.32	50881	50881-2
			.312 7.92	**.250** 6.35	**.654** 16.61	**.813** 20.65	Blue	**.170** 4.32	326882*	2-326882-1
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Blue	**.150** 3.81	51864*	51864-3
			.343 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.150** 3.81	36157*	2-36157-2
			.343 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.170** 4.32	36158*	2-36158-1
		8 M4	**.312** 7.92	**.250** 6.35	**.654** 16.61	**.813** 20.65	Blue	**.170** 4.32	53941-1*	53941-2
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Blue	**.150** 3.81	51864-1*	51864-5
			.343 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.150** 3.81	320560*	2-320560-1
			.343 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.170** 4.32	320565*	2-320565-1

*Available in small packaging quantities.

[1]Heavy duty for extra mechanical strength.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals
(Continued)

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	10	**.312** 7.92	**.250** 6.35	**.654** 16.61	**.813** 20.65	Blue	**.170** 4.32	53942-1	53942-2
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Blue	**.150** 3.81	51864-2*	51864-4
			.343 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.150** 3.81	320574*	2-320574-2
			.343 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.170** 4.32	36160*	2-36160-1
			.469 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Blue	**.170** 4.32	324533	2-324533-2
		12	**.469** 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Blue	**.170** 4.32	324086	2-324086-1
		14	**.468** 11.89	**.312** 7.92	**.716** 18.19	**.953** 24.21	Blue	**.170** 4.32	35274	—
		1/4 M6	**.469** 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Blue	**.150** 3.81	320563*	2-320563-2
			.469 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Blue	**.170** 4.32	321045*	2-321045-1
			.469 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Black	**.170** 4.32	325034	2-325034-1
		5/16 M8	**.469** 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Blue	**.150** 3.81	320575*	2-320575-1
			.469 11.91	**.437** 11.10	**.841** 21.36	**1.078** 27.38	Blue	**.170** 4.32	328998*	2-328998-1
		3/8	**.531** 13.49	**.546** 13.87	**.950** 24.13	**1.218** 30.94	Blue	**.150** 3.81	320564*	2-320564-3
			.531 13.49	**.546** 13.87	**.950** 24.13	**1.218** 30.94	Blue	**.170** 4.32	328999*	2-328999-1
		1/2 M12	**.713** 18.11	**.530** 13.46	**.934** 23.72	**1.293** 32.84	Blue	**.150** 3.81	328976	—
			.713 18.11	**.530** 13.46	**.934** 23.72	**1.293** 32.84	Blue	**.170** 4.32	328849*	—
16-14HD[1] 2,050-5,180 [1.04-2.62]	**.050** 1.27	4	**.281** 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow/Blk.	**.230** 5.84	33734	—
		6 M3.5	**.281** 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow/Blk.	**.230** 5.84	320631*	2-320631-1
			.281 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow/Blk.	**.250** 6.35	35634*	—
			.343 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow/Blk.	**.230** 5.84	33724	—
		8 M4	**.343** 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow/Blk.	**.230** 5.84	320627*	1-320627-0
			.343 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow/Blk.	**.250** 6.35	35106*	2-35106-1
		10	**.343** 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow/Blk.	**.230** 5.84	320630*	2-320630-2
			.343 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow/Blk.	**.250** 6.35	34805*	2-34805-1
			.500 12.70	**.344** 8.74	**1.179** 29.95	**1.432** 36.37	Yellow/Blk.	**.220** 5.59	329391	—
		1/4 M6	**.500** 12.70	**.344** 8.74	**.935** 23.75	**1.188** 30.18	Yellow/Blk.	**.230** 5.84	34974*	2-34974-1
			.500 12.70	**.344** 8.74	**.935** 23.75	**1.188** 30.18	Yellow/Blk.	**.250** 6.35	323682	2-323682-1
			.531 13.49	**.437** 11.10	**1.028** 26.11	**1.296** 32.92	Yellow/Blk.	**.230** 5.84	327743	1-327743-1
			.531 13.49	**.437** 11.10	**1.028** 26.11	**1.296** 32.92	Yellow/Blk.	**.250** 6.35	34806*	2-34806-3
			.531 13.49	**.437** 11.10	**1.028** 26.11	**1.296** 32.92	Blue	**.250** 6.35	—	2-34806-2
		5/16 M8	**.531** 13.49	**.437** 11.10	**1.028** 26.11	**1.296** 32.92	Yellow/Blk.	**.250** 6.35	34810	1-34810-1

*Available in small packaging quantities.

[1]Heavy duty for extra mechanical strength.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals

(Continued)



Material

Insulation-Nylon, UL 94V-2

Terminal Body and Metallic Sleeve-Copper per ASTM B-152

Plating-Tin per ASTM B-545 except where noted.

Related Product Data

Insulation Color Code-pg. 4

Packaging Quantities-pg. 4

Performance Specifications-pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
16-14HD[1] 2,050-5,180 [1.04-2.62]	**.050** 1.27	3/8	**.531** 13.49	**.437** 11.10	**1.028** 26.11	**1.296** 32.92	Yellow/Blk.	**.230** 5.84	330896	—
		1/2 M12	**.750** 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow/Blk.	**.250** 6.35	35316*	—
			1.250 31.75	**1.000** 25.40	**1.591** 40.41	**2.219** 56.36	Yellow/Blk.	**.250** 6.35	36203	—
		3/4	**1.250** 31.75	**1.000** 25.40	**1.591** 40.41	**2.219** 56.36	Yellow/Blk.	**.250** 6.35	322724	—
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	4	**.281** 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow	**.250** 6.35	35148*	1-35148-1
		6 M3.5	**.281** 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow	**.230** 5.84	320634*	2-320634-1
			.281 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow	**.250** 6.35	35149*	2-35149-1
			.312 7.92	**.302** 7.67	**.893** 22.68	**1.052** 26.72	Yellow	**.230** 5.84	326886	326886-1
			.375 9.53	**.302** 7.67	**.893** 22.68	**1.083** 27.51	Yellow	**.230** 5.84	320567*	2-320567-2
			.375 9.53	**.302** 7.67	**.893** 22.68	**1.083** 27.51	Yellow	**.250** 6.35	35107*	2-35107-1
		8 M4	**.312** 7.92	**.281** 7.14	**.872** 22.15	**1.031** 26.19	Yellow	**.230** 5.84	35787*	1-35787-0
			.312 7.92	**.302** 7.67	**.893** 22.68	**1.052** 26.72	Yellow	**.230** 5.84	324915*	—
			.375 9.53	**.302** 7.67	**.893** 22.68	**1.083** 27.51	Yellow	**.230** 5.84	320568*	2-320568-1
			.375 9.53	**.302** 7.67	**.893** 22.68	**1.083** 27.51	Yellow	**.250** 6.35	35108*	2-35108-1
		10	**.312** 7.92	**.302** 7.67	**.893** 22.68	**1.052** 26.72	Yellow	**.230** 5.84	324918*	1-324918-0
			.343 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow	**.230** 5.84	32883*	1-32883-0
			.375 9.53	**.302** 7.67	**.893** 22.68	**1.083** 27.51	Yellow	**.230** 5.84	36161*	2-36161-2
			.375 9.53	**.302** 7.67	**.893** 22.68	**1.083** 27.51	Yellow	**.250** 6.35	35109*	2-35109-1
			.500 12.70	**.344** 8.74	**.935** 23.75	**1.188** 30.18	Yellow	**.230** 5.84	2-323762-1	2-323762-3
			.500 12.70	**.344** 8.74	**1.179** 29.95	**1.432** 36.37	Yellow	**.220** 5.59	329389	—
		1/4 M6	**.500** 12.70	**.344** 8.74	**.935** 23.75	**1.188** 30.18	Yellow	**.230** 5.84	35273*	2-35273-2
			.531 13.49	**.468** 11.89	**1.054** 26.77	**1.322** 33.58	Yellow	**.230** 5.84	320569*	2-320569-3
			.531 13.49	**.468** 11.89	**1.054** 26.77	**1.322** 33.58	Yellow	**.230** 5.84	—	2-32545-4[2]
			.531 13.49	**.468** 11.89	**1.054** 26.77	**1.322** 33.58	Yellow	**.250** 6.35	35110*	2-35110-1

*Available in small packaging quantities.

[1]Heavy duty for extra mechanical strength.

[2]Terminal body plating — Gold per MIL-G-45204 Type II over Nickel per QQ-N-290.

[3]Terminal body plating — Nickel per QQ-N-290.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals
(Continued)

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	M5	**.375** 9.53	**.302** 7.67	**.967** 24.56	**1.160** 29.46	Yellow	**.300** 7.62	—	55157-2[†]
		5/16 M8	**.531** 13.49	**.468** 11.89	**1.054** 26.77	**1.322** 33.58	Yellow	**.230** 5.84	320576*	2-320576-1
			.531 13.49	**.468** 11.89	**1.054** 26.77	**1.322** 33.58	Yellow	**.250** 6.35	35111*	2-35111-1
		3/8	**.593** 15.06	**.531** 13.49	**1.115** 28.32	**1.414** 35.92	Yellow	**.230** 5.84	320577*	2-320577-3
			.593 15.06	**.531** 13.49	**1.115** 28.32	**1.414** 35.92	Yellow	**.250** 6.35	35112*	—
			.750 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow	**.250** 6.35	35150	—
		1/2 M12	**.715** 18.16	**.474** 12.04	**1.065** 27.05	**1.414** 35.92	Yellow	**.230** 5.84	52077	—
			.715 18.16	**.560** 14.22	**1.151** 29.24	**1.511** 38.38	Yellow	**.230** 5.84	331467	—
			.750 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow	**.230** 5.84	323784	—
			.750 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow	**.250** 6.35	35151*	—
		5/8 M16	**1.250** 31.75	**1.000** 25.40	**1.591** 40.41	**2.219** 56.36	Yellow	**.230** 5.84	324615	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

[†]Vinyl insulation material

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals

(Vinyl)



Material

Insulation-Vinyl, UL 94V-0

Terminal Body and Metallic Sleeve-Copper per ASTM B-152

Plating-Tin per ASTM B-545 except where noted.

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	6 M3.5	**.281** 7.14	**.250** 6.35	**.654** 16.61	**.797** 20.24	Red	**.140** 3.56	31885	—
		8 M4	**.312** 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.125** 3.18	31888	—
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.125** 3.18	2-31888-1[2]	—
		10	**.281** 7.14	**.250** 6.35	**.654** 16.61	**.797** 20.24	Red	**.125** 3.18	31884	—
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Red	**.140** 3.56	31891	—
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	10	**.312** 7.92	**.250** 6.35	**.654** 16.61	**.813** 20.65	Blue	**.170** 4.32	—	2-322238-1
			.312 7.92	**.281** 7.14	**.685** 17.40	**.844** 21.44	Blue	**.150** 3.81	—	51861-4
			.343 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.170** 4.32	31903	—
16-14HD[1] 2,050-5,180 [1.04-2.62]	**.050** 1.27	10	**.343** 8.71	**.281** 7.14	**.961** 24.41	**1.135** 28.83	Yellow/Blk.	**.300** 7.62	35363*	—
		1/4 M6	**.531** 13.49	**.437** 11.10	**1.117** 28.37	**1.385** 35.18	Yellow/Blk.	**.300** 7.62	35362*	—
		5/16 M8	**.531** 13.49	**.437** 11.10	**1.117** 28.37	**1.385** 35.18	Yellow/Blk.	**.300** 7.62	35538	—
		1/2 M12	**1.250** 31.75	**1.000** 25.40	**1.680** 42.67	**2.308** 58.62	Yellow/Blk.	**.300** 7.62	36485	—
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	6 M3.5	**.375** 9.53	**.302** 7.67	**.982** 24.94	**1.172** 29.77	Yellow	**.300** 7.62	35604	—
		8 M4	**.375** 9.53	**.302** 7.67	**.982** 24.94	**1.172** 29.77	Yellow	**.300** 7.62	35605*	2-35605-2
		10	**.375** 9.53	**.302** 7.67	**.982** 24.94	**1.172** 29.77	Yellow	**.300** 7.62	35364*	2-35364-1
		5mm[3]	**.375** 9.53	**.302** 7.67	**.967** 24.56	**1.160** 29.46	Yellow	**.300** 7.62	—	55157-2
		1/4 M6	**.500** 12.70	**.344** 8.74	**1.024** 26.01	**1.277** 32.44	Yellow	**.300** 7.62	323763	2-323763-2
			.531 13.49	**.468** 11.89	**1.148** 29.16	**1.416** 35.97	Yellow	**.300** 7.62	35345*	2-35345-1
		5/16 M8	**.531** 13.49	**.468** 11.89	**1.148** 29.16	**1.416** 35.97	Yellow	**.300** 7.62	35346*	2-35346-1
		3/8	**.593** 15.06	**.531** 13.49	**1.211** 30.76	**1.510** 38.35	Yellow	**.300** 7.62	35478	1-35478-0

*Available in small packaging quantities.

[1]Heavy duty for extra mechanical strength.

[2]Terminal body plating — Gold per MIL-G-45204 Type II over Nickel per QQ-N-290.

[3]#10 stud may be substituted.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals
(Insulation Restricting)



Material
Insulation-Nylon, UL 94V-2

Terminal Body-Copper per ASTM B-152

Plating-Tin per ASTM B-545

Metallic Sleeve-Copper per ASTM B-152

Plating-Nickel per QQ-N-290 or Tin per ASTM B-545

Related Product Data
Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color Solid/Stripe	Wire Insulation Diameter Range	Part Numbers Loose Piece	Part Numbers Tape Mounted
26 304 [0.15]	.029 0.74	2 M2	.203 5.16	.211 5.36	.632 16.05	.739 18.77	Yellow/Black	.026-.055 0.66-1.40	53078†	—
		4	.203 5.16	.211 5.36	.632 16.05	.736 18.69	Yellow/Black	.026-.055 0.66-1.40	53049†	—
		6 M3.5	.250 6.35	.243 6.17	.664 16.87	.792 20.12	Yellow/Black	.026-.055 0.66-1.40	53050†	—
		8 M4	.281 7.14	.250 6.35	.671 17.04	.814 20.68	Yellow/Black	.026-.055 0.66-1.40	53051†	—
		10	.312 7.92	.281 7.14	.702 17.83	.863 21.92	Yellow/Black	.026-.055 0.66-1.40	53052†	—
24 475 [0.24]	.020 0.51	4	.203 5.16	.211 5.36	.587 14.91	.691 17.55	Yellow/Blue	.031-.055 0.79-1.40	2-323914-2	—
		6 M3.5	.250 6.35	.281 7.14	.657 16.69	.785 19.94	Yellow/Blue	.031-.055 0.79-1.40	2-326875-4	—
		8 M4	.250 6.35	.281 7.14	.657 16.69	.785 19.94	Yellow/Blue	.031-.055 0.79-1.40	2-323916-3	—
		10	.250 6.35	.281 7.14	.657 16.69	.785 19.94	Yellow/Blue	.031-.055 0.79-1.40	2-326875-5	—
	.029 0.74	2 M2	.203 5.16	.211 5.36	.632 16.05	.739 18.77	Yellow/Blue	.031-.055 0.79-1.40	53053†	—
		4	.203 5.16	.211 5.36	.632 16.05	.736 18.69	Yellow/Blue	.031-.055 0.79-1.40	53054†	—
		6 M3.5	.250 6.35	.243 6.17	.664 16.87	.792 20.12	Yellow/Blue	.031-.055 0.79-1.40	53055†	53055-1†
		8 M4	.281 7.14	.250 6.35	.671 17.04	.814 20.68	Yellow/Blue	.031-.055 0.79-1.40	53056†	—
		10	.312 7.92	.281 7.14	.702 17.83	.860 21.84	Yellow/Blue	.031-.055 0.79-1.40	53057†	53057-1†
22 754 [0.38]	.033 0.84	2 M2	.182 4.62	.172 4.37	.638 16.21	.731 18.57	Red/Green	.038-.110 0.97-2.79	52307	—
		4	.218 5.54	.156 3.96	.622 15.80	.734 18.64	Red/Green	.038-.110 0.97-2.79	52273*	—
		6 M3.5	.218 5.54	.156 3.96	.622 15.80	.734 18.64	Red/Green	.038-.110 0.97-2.79	2-36149-3*	—
			.250 6.35	.250 6.35	.716 18.19	.844 21.44	Red/Green	.038-.110 0.97-2.79	51863-2*	51863-5
		8 M4	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Red/Green	.038-.110 0.97-2.79	1-320551-2*	1-320551-5
		10	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Red/Green	.038-.110 0.97-2.79	2-36153-3*	2-36153-6
		1/4 M6	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Red/Green	.038-.110 0.97-2.79	2-320571-3	—
		5/16 M8	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Red/Green	.038-.110 0.97-2.79	2-320572-2	—
		3/8	.531 13.49	.546 13.87	1.012 25.70	1.280 32.51	Red/Green	.038-.110 0.97-2.79	2-320573-1	—
		1/2 M12	.713 18.11	.530 13.46	.996 25.30	1.355 34.42	Red/Green	.038-.110 0.97-2.79	2-328975-1	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

†Must be crimped with 22-18 or 22-16 PIDG (red) Tooling.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals
(Insulation Restricting)

(Continued)



Material

Insulation-Nylon, UL 94V-2

Terminal Body-Copper per ASTM B-152

Plating-Tin per ASTM B-545

Metallic Sleeve-Copper per ASTM B-152

Plating-Nickel per QQ-N-290 or Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color Solid/Stripe	Wire Insulation Diameter Range	Part Numbers Loose Piece	Part Numbers Tape Mounted
20 1,186 [0.60]	.033 0.84	2 M2	.182 4.62	.172 4.37	.638 16.21	.731 18.57	Red/Red	.046-.110 1.17-2.79	52307-1	—
		4	.218 5.54	.156 3.96	.622 15.80	.734 18.64	Red/Red	.046-.110 1.17-2.79	52273-1*	—
		6 M3.5	.218 5.54	.156 3.96	.622 15.80	.734 18.64	Red/Red	.046-.110 1.17-2.79	2-36149-4*	—
			.250 6.35	.250 6.35	.716 18.19	.844 21.44	Red/Red	.046-.110 1.17-2.79	51863-3	51863-6
		8 M4	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Red/Red	.046-.110 1.17-2.79	1-320551-3*	1-320551-7
		10	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Red/Red	.046-.110 1.17-2.79	2-36153-4*	—
		1/4 M6	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Red/Red	.046-.110 1.17-2.79	2-320571-4	—
		5/16 M8	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Red/Red	.046-.110 1.17-2.79	2-320572-3	—
		3/8	.531 13.49	.546 13.87	1.012 25.70	1.280 32.51	Red/Red	.046-.110 1.17-2.79	2-320573-2	—
		1/2 M12	.713 18.11	.530 13.46	.996 25.30	1.355 34.42	Red/Red	.046-.110 1.17-2.79	2-328975-2	—
18 1,900 [0.96]	.033 0.84	4	.218 5.54	.156 3.96	.622 15.80	.734 18.64	Red/White	.056-.110 1.42-2.79	52273-2*	—
		6 M3.5	.218 5.54	.156 3.96	.622 15.80	.734 18.64	Red/White	.056-.110 1.42-2.79	2-36149-5*	—
			.250 6.35	.250 6.35	.716 18.19	.844 21.44	Red/White	.056-.110 1.42-2.79	51863-4*	51863-7
		8 M4	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Red/White	.056-.110 1.42-2.79	1-320551-4*	1-320551-8
		10	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Red/White	.056-.110 1.42-2.79	2-36153-5*	2-36153-9
		1/4 M6	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Red/White	.056-.110 1.42-2.79	2-320571-5	—
		5/16 M8	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Red/White	.056-.110 1.42-2.79	2-320572-4	2-320574-7
		3/8	.531 13.49	.546 13.87	1.012 25.70	1.280 32.51	Red/White	.056-.110 1.42-2.79	2-320573-3	—
		1/2 M12	.713 18.11	.530 13.46	.996 25.30	1.355 34.42	Red/White	.056-.110 1.42-2.79	2-328975-3	—
16 2,800 [1.42]	.033 0.84	4	.250 6.35	.171 4.34	.637 16.18	.765 19.43	Blue/Blue	.063-.130 1.60-3.30	52274	—
		6 M3.5	.250 6.35	.171 4.34	.637 16.18	.765 19.43	Blue/Blue	.063-.130 1.60-3.30	2-320561-3*	2-320561-5
			.312 7.92	.281 7.14	.747 18.97	.906 23.01	Blue/Blue	.063-.130 1.60-3.30	51864-6*	1-51864-2
		8 M4	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Blue/Blue	.063-.130 1.60-3.30	1-51864-0*	1-51864-6
		10	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Blue/Blue	.063-.130 1.60-3.30	51864-7*	—
		1/4 M6	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Blue/Blue	.063-.130 1.60-3.30	2-320563-3	—
		5/16 M8	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Blue/Blue	.063-.130 1.60-3.30	2-320575-2	—
		3/8	.531 13.49	.546 13.87	1.012 25.70	1.280 32.51	Blue/Blue	.063-.130 1.60-3.30	2-320564-1	—
		1/2 M12	.713 18.11	.530 13.46	.996 25.30	1.355 34.42	Blue/Blue	.063-.130 1.60-3.30	2-328976-1	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals
(Insulation Restricting)

(Continued)

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color Solid/Stripe	Wire Insulation Diameter Range	Part Numbers Loose Piece	Part Numbers Tape Mounted
14 4,234 [2.15]	.033 0.84	4	.250 6.35	.171 4.34	.637 16.18	.765 19.43	Blue/Green	.078-.130 1.98-3.30	52274-1	—
		6 M3.5	.250 6.35	.171 4.34	.637 16.18	.765 19.43	Blue/Green	.078-.130 1.98-3.30	2-320561-4	—
			.312 7.92	.281 7.14	.747 18.97	.906 23.01	Blue/Green	.078-.130 1.98-3.30	51864-8*	1-51864-4
		8 M4	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Blue/Green	.078-.130 1.98-3.30	1-51864-1*	1-51864-7
		10	.312 7.92	.281 7.14	.747 18.97	.906 23.01	Blue/Green	.078-.130 1.98-3.30	51864-9*	1-51864-5
		1/4 M6	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Blue/Green	.078-.130 1.98-3.30	2-320563-4	—
		5/16 M8	.469 11.91	.437 11.10	.903 22.94	1.140 28.96	Blue/Green	.078-.130 1.98-3.30	2-320575-3	—
		3/8	.531 13.49	.546 13.87	1.012 25.70	1.280 32.51	Blue/Green	.078-.130 1.98-3.30	2-320564-2	—
		1/2 M12	.713 18.11	.530 13.46	.996 25.30	1.355 34.42	Blue/Green	.078-.130 1.98-3.30	2-328976-2	—
12 6,654 [3.37]	.042 1.07	6 M3.5	.375 9.53	.302 7.67	.958 24.33	1.148 29.16	Yellow/Yellow	.095-.200 2.41-5.08	2-36161-5	—
		8 M4	.375 9.53	.302 7.67	.958 24.33	1.148 29.16	Yellow/Yellow	.095-.200 2.41-5.08	2-320568-2*	—
		10	.375 9.53	.302 7.67	.958 24.33	1.148 29.16	Yellow/Yellow	.095-.200 2.41-5.08	2-36161-3*	—
		1/4 M6	.531 13.49	.468 11.89	1.124 28.55	1.392 35.36	Yellow/Yellow	.095-.200 2.41-5.08	2-320569-5	—
		5/16 M8	.531 13.49	.468 11.89	1.124 28.55	1.392 35.36	Yellow/Yellow	.095-.200 2.41-5.08	2-320576-2	—
		3/8	.593 15.06	.531 13.49	1.187 30.15	1.486 37.74	Yellow/Yellow	.095-.200 2.41-5.08	2-320577-1	—
		1/2 M12	.715 18.16	.474 12.04	1.130 28.70	1.490 37.85	Yellow/Yellow	.095-.200 2.41-5.08	52077-1	—
10 12,066 [6.11]	.042 1.07	6 M3.5	.375 9.53	.302 7.67	.958 24.33	1.148 29.16	Yellow/Brown	.119-.200 3.02-5.08	2-36161-6	3-36161-0
		8 M4	.375 9.53	.302 7.67	.958 24.33	1.148 29.16	Yellow/Brown	.119-.200 3.02-5.08	2-320568-3*	—
		10	.375 9.53	.302 7.67	.958 24.33	1.148 29.16	Yellow/Brown	.119-.200 3.02-5.08	2-36161-4	2-36161-8
		1/4 M6	.531 13.49	.468 11.89	1.124 28.55	1.392 35.36	Yellow/Brown	.119-.200 3.02-5.08	2-320569-6	2-320569-8
		5/16 M8	.531 13.49	.468 11.89	1.124 28.55	1.392 35.36	Yellow/Brown	.119-.200 3.02-5.08	2-320576-3	—
		3/8	.593 15.06	.531 13.49	1.187 30.15	1.486 37.74	Yellow/Brown	.119-.200 3.02-5.08	2-320577-2	—
		1/2 M12	.715 18.16	.474 12.04	1.130 28.70	1.490 37.85	Yellow/Brown	.119-.200 3.02-5.08	52077-2	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Ring Tongue Terminals
90° Bend



Material

Insulation-Vinyl, UL 94V-0

Terminal Body and Metallic Sleeve-Copper per ASTM B-152

Plating-Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4


Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

	Wire Size Cicular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions D Min.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Number Loose Piece
Vinyl	22-16 509-3,260 [0.26-1.65]	**.033** 0.84	10	**.312** 7.92	**.157** 3.99	Red	**.140** 3.56	55148-1
Nylon	12-10 5,180-13,100 [2.62-6.64]	**.040** 1.02	6	**.375** 9.53	**.206** 5.23	Yellow	**.250** 6.35	696020-1

PIDG Terminals and Splices (Continued)

Rectangular Tongue Terminals



Material

Insulation -Nylon except where noted.

Terminal Body and Metallic Sleeve -Copper per ASTM B-152 except where noted.

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
26-22 202-810 [0.10-0.41]	**.020** 0.51	2 M2	**.182** 4.62	**.211** 5.36	**.542** 13.77	**.647** 16.43	**.100** 2.54	Yellow	**.082** 2.08	321206[2]	—
		6 M3.5	**.277** 7.04	**.308** 7.82	**.643** 16.33	**.783** 19.89	**.130** 3.30	Yellow	**.082** 2.08	330250	—
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	2 M2	**.182** 4.62	**.203** 5.16	**.607** 15.42	**.727** 18.47	**.115** 2.92	Red	**.125** 3.18	325148	—
		4	**.237** 6.02	**.237** 6.02	**.643** 16.33	**.796** 20.22	**.143** 3.63	Red	**.140** 3.56	2-327968-1	—
			.237 6.02	**.404** 10.26	**.810** 20.57	**1.015** 25.78	**.195** 4.95	Red	**.140** 3.56	327962	—
		5 M3	**.250** 6.35	**.187** 4.75	**.591** 15.01	**.736** 18.69	**.140** 3.56	Red	**.140** 3.56	55777-1	—
			.277 7.04	**.277** 7.04	**.702** 17.83	**.855** 21.72	**.143** 3.63	Red	**.140** 3.56	2-327950-1	—
		6 M3.5	**.237** 6.02	**.404** 10.26	**.810** 20.57	**1.015** 25.78	**.195** 4.95	Red	**.140** 3.56	2-327956-1	—
			.250 6.35	**.312** 7.92	**.716** 18.19	**.846** 21.49	**.125** 3.18	Red	**.125** 3.18	320629	2-320629-1
			.250 6.35	**.312** 7.92	**.716** 18.19	**.846** 21.49	**.125** 3.18	Red	**.140** 3.56	33476*	2-33476-1
			.302 7.67	**.465** 11.81	**.872** 22.15	**1.109** 28.17	**.227** 5.77	Red	**.140** 3.56	2-327938-1	2-327938-2
		8 M4	**.302** 7.67	**.465** 11.81	**.872** 22.15	**1.109** 28.17	**.227** 5.77	Red	**.140** 3.56	327944*	2-327944-2
			.390 9.91	**.621** 15.77	**1.039** 26.39	**1.359** 34.52	**.310** 7.87	Red	**.140** 3.56	327932	—
		10	**.312** 7.92	**.281** 7.14	**.685** 17.40	**.893** 22.68	**.203** 5.16	Red	**.140** 3.56	320209*	—
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	4	**.237** 6.02	**.237** 6.02	**.643** 16.33	**.796** 20.22	**.143** 3.63	Blue	**.150** 3.81	2-327970-4	—
			.237 6.02	**.404** 10.26	**.810** 20.57	**1.015** 25.78	**.195** 4.95	Blue	**.150** 3.81	2-327964-4	—
		5 M3	**.244** 6.20	**.312** 7.92	**.716** 18.19	**.856** 21.74	**.125** 3.18	Blue	**.150** 3.81	—	55694-1[1]
			.277 7.04	**.277** 7.04	**.702** 17.83	**.855** 21.72	**.143** 3.63	Blue	**.150** 3.81	2-327952-2	—

*Available in small packaging quantities.

[1]Insulation - Vinyl

[2]Terminal Body - Brass per MIL-C-50.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Rectangular Tongue Terminals

(Continued)



Material

Insulation -Nylon except where noted.

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling — pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.237** 6.02	**.404** 10.26	**.810** 20.57	**1.015** 25.78	**.195** 4.95	Blue	**.150** 3.81	2-327958-4	—
			.237 6.02	**.404** 10.26	**.810** 20.57	**1.015** 25.78	**.195** 4.95	Blue	**.170** 4.32	2-327958-1	—
			.244 6.20	**.312** 7.92	**.716** 18.19	**.856** 21.74	**.125** 3.18	Blue	**.150** 3.81	33172	—
			.244 6.20	**.312** 7.92	**.716** 18.19	**.856** 21.74	**.125** 3.18	Blue	**.170** 4.32	33173*	—
			.296 7.52	**.203** 5.16	**.607** 15.42	**.752** 19.10	**.140** 3.56	Blue	**.150** 3.81	33168	—
			.302 7.67	**.465** 11.81	**.872** 22.15	**1.109** 28.17	**.227** 5.77	Blue	**.150** 3.81	2-327940-4	—
		8 M4	**.244** 6.20	**.312** 7.92	**.716** 18.19	**.856** 21.74	**.125** 3.18	Blue	**.170** 4.32	35279	—
			.296 7.52	**.343** 8.71	**.747** 18.97	**.939** 23.85	**.187** 4.75	Blue	**.170** 4.32	321283*	—
			.302 7.67	**.465** 11.81	**.872** 22.15	**1.109** 28.17	**.227** 5.77	Blue	**.150** 3.81	2-327946-4	—
			.390 9.91	**.621** 15.77	**1.039** 26.39	**1.359** 34.52	**.310** 7.87	Blue	**.150** 3.81	2-327934-2	—
		10	**.312** 7.92	**.281** 7.14	**.685** 17.40	**.940** 23.88	**.250** 6.35	Blue	**.170** 4.32	324603	—
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	4	**.237** 6.02	**.237** 6.02	**.831** 21.11	**.984** 24.99	**.143** 3.63	Yellow	**.230** 5.84	327972	—
			.237 6.02	**.404** 10.26	**.998** 25.35	**1.203** 30.56	**.195** 4.95	Yellow	**.230** 5.84	327966	—
		5 M3	**.277** 7.04	**.277** 7.04	**.889** 22.58	**1.042** 26.47	**.143** 3.63	Yellow	**.230** 5.84	327954	2-327954-2
		6 M3.5	**.237** 6.02	**.404** 10.26	**.998** 25.35	**1.203** 30.56	**.195** 4.95	Yellow	**.230** 5.84	2-327960-1	2-327960-2
			.250 6.35	**.302** 7.67	**.893** 22.68	**1.085** 27.56	**.187** 4.75	Yellow	**.230** 5.84	329697	—
			.290 7.37	**.218** 5.54	**.809** 20.55	**.954** 24.23	**.140** 3.56	Yellow	**.230** 5.84	34512	—
			.302 7.67	**.465** 11.81	**1.044** 26.52	**1.281** 32.54	**.227** 5.77	Yellow	**.230** 5.84	327942	—
		8 M4	**.302** 7.67	**.465** 11.81	**1.044** 26.52	**1.281** 32.54	**.227** 5.77	Yellow	**.230** 5.84	327948	—
			.302 7.67	**.465** 11.81	**1.077** 27.36	**1.247** 31.67	**.160** 4.06	Yellow	**.230** 5.84	331268	2-331268-1
			.390 9.91	**.621** 15.77	**1.211** 30.76	**1.531** 38.89	**.310** 7.87	Yellow	**.230** 5.84	327936	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Rectangular Tongue Terminals

(Continued)



Material

Insulation -Nylon, UL 94V-2

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Metallic Sleeve -Copper per ASTM B-152

Plating — Nickel per QQ-N-290

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4


Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color Solid/Stripe	Wire Insulation Diameter Range	Part Numbers Loose Piece
24 475 [0.24]	**.020** 0.51	6 M3.5	**.312** 7.92	**.308** 7.82	**.683** 17.35	**.875** 22.23	**.187** 4.75	Yellow/Blue	**.031-.055** 0.79-1.40	2-326876-2
10 12,066 [6.11]	**.042** 1.07	5 M3	**.277** 7.04	**.277** 7.04	**.934** 23.72	**1.087** 27.61	**.143** 3.63	Yellow/Brown	**.119-.200** 3.02-5.08	53912-2
		8 M4	**.390** 9.91	**.621** 15.77	**1.276** 32.41	**1.596** 40.54	**.310** 7.87	Yellow/Brown	**.119-.200** 3.02-5.08	53914-2

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Spade Tongue Terminals



Material

Insulation -Nylon, UL 94V-2

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
26-24 238-475 [0.12-0.24]	**.029** 0.74	6 M3.5	**.250** 6.35	**.211** 5.36	**.632** 16.05	**.709** 18.01	**.072** 1.83	Yellow	**.095** 2.41	—	53115-2
26-22 202-810 [0.10-0.41]	**.020** 0.51	0	**.125** 3.18	**.078** 1.98	**.409** 10.39	**.476** 12.09	**.062** 1.57	Yellow	**.082** 2.08	322001	—
		4	**.203** 5.16	**.211** 5.36	**.542** 13.77	**.627** 15.93	**.076** 1.93	Yellow	**.082** 2.08	321035*	2-321035-1
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	2 M2	**.182** 4.62	**.203** 5.16	**.607** 15.42	**.727** 18.47	**.115** 2.92	Red	**.140** 3.56	328394*	2-328394-1
		4	**.218** 5.54	**.156** 3.96	**.560** 14.22	**.674** 17.12	**.109** 2.77	Red	**.125** 3.18	1-327717-0	—
			.218 5.54	**.156** 3.96	**.560** 14.22	**.674** 17.12	**.109** 2.77	Red	**.140** 3.56	327717*	1-327717-2
		6 M3.5	**.250** 6.35	**.312** 7.92	**.716** 18.19	**.846** 21.49	**.125** 3.18	Red	**.140** 3.56	34541*	2-34541-1
			.297 7.54	**.203** 5.16	**.607** 15.42	**.753** 19.13	**.141** 3.58	Red	**.125** 3.18	34080*	2-34080-1
			.297 7.54	**.203** 5.16	**.607** 15.42	**.753** 19.13	**.141** 3.58	Red	**.140** 3.56	326861*	2-326861-1
			.344 8.74	**.218** 5.54	**.622** 15.80	**.783** 19.89	**.156** 3.96	Red	**.125** 3.18	32403	—
			.344 8.74	**.218** 5.54	**.622** 15.80	**.783** 19.89	**.156** 3.96	Red	**.140** 3.56	32404	2-32404-1
		8 M4	**.375** 9.53	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Red	**.125** 3.18	32050*	2-32050-1
			.375 9.53	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Red	**.140** 3.56	32053*	2-32053-1
		10	**.375** 9.53	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Red	**.125** 3.18	32051*	2-32051-1
			.375 9.53	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Red	**.140** 3.56	32054*	2-32054-1

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Spade Tongue Terminals

(Continued)



Material

Insulation -Nylon, UL 94V-2

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.244** 6.20	**.312** 7.92	**.716** 18.19	**.846** 21.49	**.125** 3.18	Blue	**.170** 4.32	328281*	1-328281-1
			.297 7.54	**.203** 5.16	**.607** 15.42	**.753** 19.13	**.141** 3.58	Blue	**.170** 4.32	35559*	2-35559-1
			.385 9.78	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Blue	**.170** 4.32	32058*	—
		8 M4	**.297** 7.54	**.203** 5.16	**.607** 15.42	**.753** 19.13	**.141** 3.58	Blue	**.170** 4.32	321233*	2-321233-1
			.312 7.92	**.375** 9.53	**.779** 19.79	**1.034** 26.26	**.250** 6.35	Blue	**.170** 4.32	325199	—
			.385 9.78	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Blue	**.150** 3.81	32056*	2-32056-1
			.385 9.78	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Blue	**.170** 4.32	32059*	2-32059-1
		10	**.385** 9.78	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Blue	**.150** 3.81	32057	—
			.385 9.78	**.312** 7.92	**.716** 18.19	**.908** 23.06	**.187** 4.75	Blue	**.170** 4.32	32060*	2-32060-1
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	6 M3.5	**.290** 7.37	**.218** 5.54	**.809** 20.55	**.954** 24.23	**.140** 3.56	Yellow	**.230** 5.84	322985*	1-322985-0
			.312 7.92	**.296** 7.52	**.887** 22.53	**1.095** 27.81	**.203** 5.16	Yellow	**.230** 5.84	326859*	2-326859-1
		8 M4	**.312** 7.92	**.468** 11.89	**1.059** 26.90	**1.314** 33.38	**.250** 6.35	Yellow	**.230** 5.84	325197	—
			.406 10.31	**.296** 7.52	**.887** 22.53	**1.095** 27.81	**.203** 5.16	Yellow	**.230** 5.84	32588*	2-32588-1
			.406 10.31	**.296** 7.52	**.887** 22.53	**1.095** 27.81	**.203** 5.16	Yellow	**.250** 6.35	35152*	2-35152-1
		10	**.406** 10.31	**.296** 7.52	**.887** 22.53	**1.095** 27.81	**.203** 5.16	Yellow	**.230** 5.84	32589*	2-32589-1

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Flanged Spade Tongue Terminals



Material

Insulation -Nylon, UL 94V-2

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	H Min.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
26-22 202-810 [0.10-0.41]	**.020** 0.51	2 M2	**.182** 4.62	**.203** 5.16	**.534** 13.56	**.649** 16.48	**.110** 2.79	**.026** 0.66	Yellow	**.082** 2.08	324597*	2-324597-1
		4	**.193** 4.90	**.203** 5.16	**.534** 13.56	**.649** 16.48	**.110** 2.79	**.026** 0.66	Yellow	**.082** 2.08	52369*	52369-1
		6 M3.5	**.250** 6.35	**.203** 5.16	**.534** 13.56	**.649** 16.48	**.110** 2.79	**.026** 0.66	Yellow	**.082** 2.08	51874*	51874-1
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	2 M2	**.182** 4.62	**.203** 5.16	**.607** 15.42	**.727** 18.47	**.115** 2.92	**.041** 1.04	Red	**.125** 3.18	2-324608-2	—
			.182 4.62	**.203** 5.16	**.607** 15.42	**.727** 18.47	**.115** 2.92	**.041** 1.04	Red	**.140** 3.56	324608*	2-324608-1
		6 M3.5	**.250** 6.35	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.046** 1.17	Red	**.125** 3.18	322777*	2-322777-1
			.265 6.73	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.046** 1.17	Red	**.140** 3.56	322426	—
			.296 7.52	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.046** 1.17	Red	**.125** 3.18	32561*	2-32561-1
			.296 7.52	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.046** 1.17	Red	**.140** 3.56	32562*	2-32562-1
			.328 8.33	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.046** 1.17	Red	**.140** 3.56	324557	2-324557-1
		8 M4	**.296** 7.52	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.046** 1.17	Red	**.140** 3.56	2-32562-2	2-32562-3
			.416 10.57	**.250** 6.35	**.654** 16.61	**.830** 21.08	**.171** 4.34	**.062** 1.57	Red	**.125** 3.18	32497	2-32497-1
			.416 10.57	**.250** 6.35	**.654** 16.61	**.830** 21.08	**.171** 4.34	**.062** 1.57	Red	**.140** 3.56	32498*	2-32498-1
		10	**.296** 7.52	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.046** 1.17	Red	**.140** 3.56	1-331366-0	1-331366-1
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.294** 7.47	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.047** 1.19	Blue	**.150** 3.81	2-320861-2	2-320861-3
			.294 7.47	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.047** 1.19	Blue	**.170** 4.32	320861*	2-320861-1
			.328 8.33	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.047** 1.19	Blue	**.170** 4.32	324567*	—
		8 M4	**.294** 7.47	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.047** 1.19	Blue	**.170** 4.32	320862*	2-320862-1
			.416 10.57	**.250** 6.35	**.654** 16.61	**.830** 21.08	**.171** 4.34	**.062** 1.57	Blue	**.150** 3.81	33155*	—
			.416 10.57	**.250** 6.35	**.654** 16.61	**.830** 21.08	**.171** 4.34	**.062** 1.57	Blue	**.170** 4.32	33156	2-33156-1
		10	**.294** 7.47	**.203** 5.16	**.607** 15.42	**.737** 18.72	**.125** 3.18	**.052** 1.19	Blue	**.170** 4.32	320863*	2-320863-2
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	6 M3.5	**.296** 7.52	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.230** 5.84	324577	1-324577-0
			.296 7.52	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.250** 6.35	325150*	—
			.328 8.33	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.230** 5.84	324587	—
		8 M4	**.416** 10.57	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.230** 5.84	32510*	2-32510-1
		10	**.416** 10.57	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.230** 5.84	326865	2-326865-1
			.416 10.57	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.250** 6.35	324015*	2-324015-1

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Short Spring Spade Tongue Terminals



Material

Insulation -Nylon, UL 94V-2

Terminal Body -Phosphor Bronze per ASTM B-139

Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
26-22 202-810 [0.10-0.41]	**.020** 0.51	2 M2	**.171** 4.34	**.206** 5.23	**.537** 13.64	**.651** 16.54	**.109** 2.77	Yellow	**.082** 2.08	52921*	52921-1
		4	**.203** 5.16	**.219** 5.56	**.550** 13.97	**.695** 17.65	**.140** 3.56	Yellow	**.082** 2.08	52922*	52922-1
		5 M3	**.250** 6.35	**.203** 5.16	**.534** 13.56	**.679** 17.25	**.140** 3.56	Yellow	**.082** 2.08	52923	52923-1
		6 M3.5	**.250** 6.35	**.203** 5.16	**.534** 13.56	**.679** 17.25	**.140** 3.56	Yellow	**.082** 2.08	52924*	52924-1
		8 M4	**.375** 9.53	**.281** 7.14	**.612** 15.54	**.787** 19.99	**.170** 4.32	Yellow	**.082** 2.08	52925	52925-1
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	4	**.203** 5.16	**.250** 6.35	**.654** 16.61	**.799** 20.29	**.140** 3.56	Red	**.125** 3.18	52927*	52927-1
		5 M3	**.250** 6.35	**.250** 6.35	**.654** 16.61	**.799** 20.29	**.140** 3.56	Red	**.125** 3.18	52928*	52928-1
		6 M3.5	**.250** 6.35	**.250** 6.35	**.654** 16.61	**.799** 20.29	**.140** 3.56	Red	**.125** 3.18	52929*	52929-1
			.250 6.35	**.250** 6.35	**.654** 16.61	**.799** 20.29	**.140** 3.56	Red	**.140** 3.56	—	52929-3
		8 M4	**.244** 6.20	**.281** 7.14	**.725** 18.42	**.895** 22.73	**.170** 4.32	Red	**.140** 3.56	—	55768-1
			.375 9.53	**.281** 7.14	**.685** 17.40	**.860** 21.84	**.170** 4.32	Red	**.125** 3.18	52930*	52930-1
			.375 9.53	**.281** 7.14	**.685** 17.40	**.860** 21.84	**.170** 4.32	Red	**.140** 3.56	—	52930-3
		10	**.406** 10.31	**.281** 7.14	**.685** 17.40	**.908** 23.06	**.218** 5.54	Red	**.125** 3.18	52931*	52931-1
			.406 10.31	**.281** 7.14	**.685** 17.40	**.908** 23.06	**.218** 5.54	Red	**.140** 3.56	—	52931-3
		1/4 M6	**.625** 15.88	**.343** 8.71	**.747** 18.97	**1.033** 26.24	**.281** 7.14	Red	**.125** 3.18	52933*	—
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	5 M3	**.250** 6.35	**.250** 6.35	**.654** 16.61	**.799** 20.29	**.140** 3.56	Blue	**.170** 4.32	52934*	52934-1
		6 M3.5	**.250** 6.35	**.250** 6.35	**.654** 16.61	**.799** 20.29	**.140** 3.56	Blue	**.170** 4.32	52935*	52935-1
			.250 6.35	**.250** 6.35	**.654** 16.61	**.799** 20.29	**.140** 3.56	Blue	**.182** 4.62	52935-2*	52935-3
		8 M4	**.375** 9.53	**.281** 7.14	**.685** 17.40	**.860** 21.84	**.170** 4.32	Blue	**.170** 4.32	52936*	52936-1
			.375 9.53	**.281** 7.14	**.685** 17.40	**.860** 21.84	**.170** 4.32	Blue	**.182** 4.62	52936-2	52936-3
		10	**.406** 10.31	**.281** 7.14	**.685** 17.40	**.908** 23.06	**.218** 5.54	Blue	**.170** 4.32	52937*	52937-1
			.406 10.31	**.281** 7.14	**.685** 17.40	**.908** 23.06	**.218** 5.54	Blue	**.182** 4.62	52937-2*	52937-3
		1/4 M6	**.625** 15.88	**.343** 8.71	**.747** 18.97	**1.033** 26.24	**.281** 7.14	Blue	**.170** 4.32	52939	—
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	5 M3	**.250** 6.35	**.169** 4.29	**.770** 19.56	**.959** 24.36	**.184** 4.67	Yellow	**.250** 6.35	52940*	52940-1
		6 M3.5	**.250** 6.35	**.174** 4.42	**.775** 19.69	**.959** 24.36	**.179** 4.55	Yellow	**.250** 6.35	52941*	52941-1
		8 M4	**.375** 9.53	**.276** 7.01	**.877** 22.28	**1.052** 26.72	**.170** 4.32	Yellow	**.250** 6.35	52942*	52942-1
		10	**.406** 10.31	**.276** 7.01	**.877** 22.28	**1.100** 27.94	**.218** 5.54	Yellow	**.250** 6.35	52943*	52943-1
		1/4 M6	**.625** 15.88	**.338** 8.59	**.939** 23.85	**1.225** 31.12	**.281** 7.14	Yellow	**.250** 6.35	52945*	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Long Spring Spade Tongue Terminals



Material

Insulation -Nylon, UL 94V-2

Terminal Body -Phosphor Bronze per ASTM B-139

Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
26-22 202-810 [0.10-0.41]	**.020** 0.51	6 M3.5	**.250** 6.35	**.235** 5.97	**.566** 14.38	**.847** 21.51	**.276** 7.01	Yellow	**.082** 2.08	52403	52403-1
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	4	**.203** 5.16	**.201** 5.11	**.615** 15.62	**.896** 22.76	**.276** 7.01	Red	**.125** 3.18	52408	—
		6 M3.5	**.250** 6.35	**.238** 6.05	**.652** 16.56	**.933** 23.70	**.276** 7.01	Red	**.125** 3.18	52409*	52409-1
			.250 6.35	**.238** 6.05	**.652** 16.56	**.933** 23.70	**.276** 7.01	Red	**.140** 3.56	52409-2	52409-3
		8 M4	**.281** 7.14	**.270** 6.86	**.684** 17.37	**.979** 24.87	**.290** 7.37	Red	**.125** 3.18	52410*	52410-1
		10	**.343** 8.71	**.283** 7.19	**.697** 17.70	**1.005** 25.53	**.303** 7.70	Red	**.125** 3.18	52411*	52411-1
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.250** 6.35	**.238** 6.05	**.652** 16.56	**.933** 23.70	**.276** 7.01	Blue	**.150** 3.81	52420*	52420-2
			.250 6.35	**.238** 6.05	**.652** 16.56	**.933** 23.70	**.276** 7.01	Blue	**.170** 4.32	52420-1*	52420-3
		8 M4	**.281** 7.14	**.270** 6.86	**.684** 17.37	**.979** 24.87	**.290** 7.37	Blue	**.150** 3.81	52421*	—
			.281 7.14	**.270** 6.86	**.684** 17.37	**.979** 24.87	**.290** 7.37	Blue	**.170** 4.32	52421-1*	52421-3
		10	**.343** 8.71	**.283** 7.19	**.697** 17.70	**1.005** 25.53	**.303** 7.70	Blue	**.170** 4.32	52422-1*	52422-3
		1/4 M6	**.437** 11.10	**.345** 8.76	**.759** 19.28	**1.102** 27.99	**.338** 8.59	Blue	**.150** 3.81	52423	52423-2
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	6 M3.5	**.312** 7.92	**.242** 6.15	**.843** 21.41	**1.131** 28.73	**.283** 7.19	Yellow	**.230** 5.84	52430	52430-2
			.312 7.92	**.242** 6.15	**.843** 21.41	**1.131** 28.73	**.283** 7.19	Yellow	**.250** 6.35	52430-1	52430-3
		8 M4	**.375** 9.53	**.273** 6.93	**.874** 22.20	**1.174** 29.82	**.295** 7.49	Yellow	**.250** 6.35	52431-1	52431-3
		10	**.375** 9.53	**.305** 7.75	**.906** 23.01	**1.219** 30.96	**.308** 7.82	Yellow	**.230** 5.84	—	52432-2
			.375 9.53	**.305** 7.75	**.906** 23.01	**1.219** 30.96	**.308** 7.82	Yellow	**.250** 6.35	52432-1	52432-3
		1/4 M6	**.437** 11.10	**.345** 8.76	**.946** 24.03	**1.289** 32.74	**.338** 8.59	Yellow	**.250** 6.35	52433-1	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Slotted Ring Tongue Terminals



Material

Insulation -Nylon except where noted.

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66


Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
26-22 202-810 [0.10-0.41]	**.020** 0.51	6 M3.5	**.250** 6.35	**.281** 7.14	**.612** 15.54	**.719** 18.26	Yellow	**.082** 2.08	323011	2-323011-2
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	6 M3.5	**.312** 7.92	**.281** 7.14	**.685** 17.40	**.828** 21.03	Red	**.140** 3.56	35216*	2-35216-1
		8 M4	**.281** 7.14	**.250** 6.35	**.654** 16.61	**.770** 19.56	Red	**.140** 3.56	36954*	2-36954-2
		10	**.312** 7.92	**.281** 7.14	**.685** 17.40	**.812** 20.62	Red	**.125** 3.18	331453	1-331453-0
		1/4 M6	**.469** 11.91	**.437** 11.10	**.841** 21.36	**1.039** 26.39	Red	**.125** 3.18	321808	—
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.343** 8.71	**.281** 7.14	**.685** 17.40	**.844** 21.44	Blue	**.170** 4.32	34406	—
		8 M4	**.344** 8.74	**.281** 7.14	**.685** 17.40	**.837** 21.26	Blue	**.170** 4.32	35440	—
16-14 HD 2,050-5,180 [1.04-2.62]	**.048** 1.22	3/8	**.750** 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow/Black	**.250** 6.35	696077-2	696077-1
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	1/4 M6	**.531** 13.49	**.468** 11.89	**1.156** 29.36	**1.390** 35.31	Yellow	**.300** 7.62	321611[1]	—
	.040 1.02	3/8	**.750** 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow	**.250** 6.35	696076-2	696076-1

*Available in small packaging quantities.

[1]Insulation — Vinyl.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Hook Tongue Terminals



Material

Insulation -Nylon except where noted.

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	0.84 **.033**	6 M3.5	**.281** 7.14	**.203** 5.16	**.607** 15.42	**.750** 19.05	Red	**.140** 3.56	34313*	—
		8 M4	**.343** 8.71	**.296** 7.52	**.705** 17.91	**.879** 22.33	Red	**.140** 3.56	32456	—
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.343** 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.150** 3.81	320381	2-320381-1
		8 M4	**.343** 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.170** 4.32	320306*	2-320306-1
		10	**.343** 8.71	**.281** 7.14	**.685** 17.40	**.859** 21.82	Blue	**.170** 4.32	35481[1]	—

*Available in small packaging quantities.

[1]Insulation — Vinyl.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Multiple Stud Terminals



Material

Insulation -Nylon, UL 94V-2

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Metallic Sleeve -Copper per ASTM B-152

Plating -Nickel per QQ-N-290

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5


Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	6-8-10	**.325** 8.26	**.281** 7.14	**.685** 17.40	**.957** 24.31	Red	**.125** 3.18	54771-1*	54771-2
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	6-8-10	**.325** 8.26	**.302** 7.67	**.893** 22.68	**1.165** 29.59	Yellow	**.230** 5.84	54773-1*	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Offset Ring Tongue Terminals



Material

Insulation -Nylon, UL 94V-2

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	6 M3.5	**.375** 9.53	**.312** 7.92	**.716** 18.19	**.906** 23.01	Red	**.125** 3.18	323039
			.375 9.53	**.312** 7.92	**.716** 18.19	**.906** 23.01	Red	**.125** 3.18	324011
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.375** 9.53	**.312** 7.92	**.716** 18.19	**.906** 23.01	Blue	**.150** 3.81	323817
		10	**.375** 9.53	**.312** 7.92	**.716** 18.19	**.906** 23.01	Blue	**.150** 3.81	323818

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Offset Ring Tongue Terminals

(Insulation Restricting)



Material

Insulation -Nylon, UL 94V-2

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color Solid/Stripe	Wire Insulation Diameter Range	Part Numbers Loose Piece
22 754 [0.38]	**.033** 0.84	6 M3.5	**.375** 9.53	**.312** 7.92	**.758** 19.25	**.946** 24.03	Red/Green	**.038-.110** 0.97-2.79	52284-4
20 1,186 [0.60]	**.033** 0.84	6 M3.5	**.375** 9.53	**.312** 7.92	**.758** 19.25	**.946** 24.03	Red/Red	**.046-.110** 1.17-2.79	52284-2
		10	**.375** 9.53	**.312** 7.92	**.758** 19.25	**.946** 24.03	Red/Red	**.046-.110** 1.17-2.79	52284-3
16 2,800 [1.42]	**.033** 0.84	6 M3.5	**.375** 9.53	**.312** 7.92	**.748** 19.00	**.938** 23.83	Blue/Blue	**.063-.130** 1.60-3.30	52283-2
14 4,234 [2.15]	**.033** 0.84	10	**.375** 9.53	**.312** 7.92	**.748** 19.00	**.938** 23.83	Blue/Green	**.078-.130** 1.98-3.30	52283-1

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

SHUR-PLUG Terminal



.156 Series

Material

Insulation -Nylon, UL 94V-2

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4


Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Dimension L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
16-14 2,050-5,180 [1.04-2.62]	**.790** 20.07	Blue	**.170** 4.32	324225*	2-324225-1
16-14 Receptacle 2,050-5,180 [1.04-2.62]	**.768** 19.51	Blue	**.157** 3.99	165429-1	—

*Available in small packaging quantities.

3-Way Connector Terminal



Material

Insulation -Nylon, UL 94V-2

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Rivet -Brass per QQ-B-626

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Dimensions W Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Number Loose Piece
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	**.859** 21.82	**1.370** 34.80	Blue	**.170** 4.32	53222-1*

*Available in small packaging quantities.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Tabs

Material

Insulation -Nylon, UL 94V-2

Terminal Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545


Related Product Data

Insulation Color Code -pg. 4


Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5


Application Tooling-pg. 66



Style A



Style B



Style C

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Style	Dimensions W	C Min.	L Max.	D	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	A	**.140** 3.56	**.480** 12.19	**.904** 22.96	—	Red	**.140** 3.56	34294*
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	B	**.156** 3.96	**.375** 9.53	**.809** 20.55	—	Blue	**.170** 4.32	327748
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	C	**.225** 5.72	**.600** 15.24	**1.194** 30.33	**.125** 3.18	Yellow	**.230** 5.84	324543*

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to end of tab.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425


South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)


Butt Splices



Standard and Radiation Resistant



Step Down Assembly[1]



Special

Material

Insulation Sleeve - Standard, Step Down Assembly and Special – Nylon Radiation Resistant – Polyvinylidene Fluoride (PVF_2)

Splice Body and Insulation Support Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils[2] [mm²]	Style	Dimension L Max.	Splice Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
26-24[3] 238-475 [0.12-0.24]	Standard	**.890** 22.61	Yellow	**.082** 2.08	323994	2-323994-1
26-22 202-810 [0.10-0.41]		**.890** 22.61	Yellow	**.082** 2.08	2-323994-2*	—
24-20 320-1,290 [0.16-0.65]		**1.035** 26.29	Natural	**.100** 2.54	323975	2-323975-3
22-16[4] 509-3,260 [0.26-1.65]		**1.265** 32.13	Red	**.125** 3.18	320559*	2-320559-4
16-14 2,050-5,180 [1.04-2.62]		**1.265** 32.13	Blue	**.150** 3.81	320562*	2-320562-3
12-10 5,180-13,100 [2.62-6.64]		**1.656** 42.06	Yellow	**.220** 5.59	320570*	2-320570-3†
16-14 2,050-5,180 [1.04-2.62] to 22-18 509-1,900 [0.26-0.96]	Step Down Assembly	**1.265** 32.13	Blue	**.150/.115** 3.81/2.92	327583	2-327583-1
12-10 5,180-13,100 [2.62-6.64] to 22-18 509-1,900 [0.26-0.96]		**1.656** 42.06	Yellow	**.220/.140** 5.59/3.56	327639	—
12-10 5,180-13,100 [2.62-6.64] to 16-14 2,050-5,180 [1.04-2.62]		**1.656** 42.06	Yellow	**.220/.170** 5.59/4.32	327638	—
26-24[3] 238-475 [0.12-0.24]	Radiation Resistant	**.890** 22.61	Natural w/ Yellow Stripes	**.082** 2.08	53546-1	—
26-22 202-810 [0.10-0.41]	Radiation Resistant	**.890** 22.61	Natural w/ Yellow Stripes	**.082** 2.08	53546-3	—
24-20 320-1,290 [0.16-0.65]	Radiation Resistant	**1.035** 26.29	Natural w/ White Stripes	**.100** 2.54	53547-1	53547-2
22-16[4] 509-3,260 [0.26-1.65]		**1.265** 32.13	Natural w/ Red Stripes	**.125** 3.18	53548-1*	53548-2
16-14 2,050-5,180 [1.04-2.62]		**1.265** 32.13	Natural w/ Blue Stripes	**.150** 3.81	53549-1*	53549-2
12-10 5,180-13,100 [2.62-6.64]		**1.656** 42.06	Natural w/ Yellow Stripes	**.220** 5.59	53550-1*	—
12-10 5,180-13,100 [2.62-6.64]	Special	**1.245** 31.62	Yellow	**.220** 5.59	328961[5]	—

*Available in small packaging quantities.

[1]Includes adapter insert.

[2]When using two or more wires in either end of a butt splice, the combined cross sectional area must be within the (CMA) circular mil area range listed.

[3]26-24 range in accordance with MIL-T-7928.

[4]22-16 splices are 22-18 range in accordance with MIL-T-7928.

[5]12-10 butt splice, threaded 8-32 one end.

†AMP-TAPETRONIC machine tools only.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG Terminals and Splices (Continued)

Butt Splice Step Down Adapter Inserts[1]



Material

Adapter Body -Copper per ASTM B-152

Plating -Zinc Plate / DyeChromate

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5


Application Tooling-pg. 66

Butt Splice		Adapter Insert			
Wire Size Circular Mils [mm²]	**Part No.**	**Wire Size Circular Mils [mm²]**	**Dimension L**	**Color Code**	**Part Numbers**
16-14 2,050-5,180 [1.04-2.62]	320562	22-18 509-1,900 [0.26-0.96]	**.350** 8.89	Red	1-327635-1
			.402 10.21	Red	327635*
12-10 5,180-13,100 [2.62-6.64]	320570	22-18 509-1,900 [0.26-0.96]	**.562** 14.27	Red	327636*
		16-14 2,050-5,180 1.04-2.62]	**.562** 14.27	Blue	327637*

*Available in small packaging quantities.

1Adapter inserts can be ordered separately for use in specific Standard PIDG Butt Splices.

Knife Disconnect Splices



Material

Insulation -Nylon, UL 94V-2

Splice Body and Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	**Material Thickness**	**Dimensions**		**Splice Insulation Color**	**Wire Insulation Diameter Max.**	**Part Numbers**	
		W	**L Max.**			**Loose Piece**	**Tape Mounted**
22-16 509-3,260 [0.26-1.65]	**.031** 0.79	**.203** 5.16	**.878** 22.30	Red	**.125** 3.18	320555*	—
		.203 5.16	**.878** 22.30	Red	**.140** 3.56	32446*	2-32446-1
16-14 2,050-5,180 [1.04-2.62]	**.031** 0.79	**.203** 5.16	**.878** 22.30	Blue	**.150** 3.81	320566*	—
		.203 5.16	**.878** 22.30	Blue	**.170** 4.32	32448*	—
12-10 5,180-13,100 [2.62-6.64]	**.040** 1.02	**.281** 7.14	**1.234** 31.34	Yellow	**.230** 5.84	320620*	—
		.281 7.14	**1.260** 32.00	Yellow	**.250** 6.35	35762*	—

*Available in small packaging quantities.

PIDG FASTON Terminals and Splices

Product Facts

- Pre-insulated terminal designed for uniformed reliability in most difficult circuit environment
- Consists of an unplated or tin-plated brass body or a tin-plated phosphor bronze body with a specially designed copper sleeve and insulation sleeve fitted over the terminal barrel
- Design of the tool dies and construction of the terminal permits uniform insulation thickness under crimping pressure, transmitting this pressure evenly to the center of the crimp area

The AMP Mated Tool/Terminal Concept

- AMP compression crimping produces crimps for a given size wire and terminal that are alike in appearance and performance
- Terminal and the crimping tool are designed as uniform matched devices
- Dies are precision-engineered from the finest hard-metal alloys
- Crimping pressure is controlled by a ratchet device on the hand tool or a corresponding pre-calibration in the crimping jaws of AMP automated crimping machines

The Crimp

- When done properly, crimping pressure can neither overstress nor understress the terminal barrel—machined dies fully bottom to the precise crimp height
- Resulting termination is free of contamination
- Resistant to shock and critical environments
- Tensile strength approaches that of the wire itself



Temperature Rating: 105°C Max.

AMP PIDG FASTON Terminals (Use TETRA-CRIMP Tooling)

AMP Wire Range	Component Recognized File E 66717	LR 7189 Certified
22-18	22-18 Stranded	300 V Max., 105°C. Max.[1]
16-14	16-14 Stranded	
12-10	12-10 Stranded	

AMP PIDG FASTON Line Splice Connectors "250" Series

Component Recognized File E 66717	105°C Max. (Vinyl)	LR 7189 Certified	105°C Max. (Vinyl)
AMP Part No. 1-321235-0 1-321235-1	600 V Max.	AMP Part No. 1-321235-0 1-321235-1	300 V Max.
321235 321688	300 V Max.	321235 321688	300 V Max.

[1]UL & CSA — Nylon except where noted

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG FASTON Terminals and Splices (Continued)

Receptacles

Receptacle Style:


A - No dimple with wire stop
B - Dimple with wire stop
C - No dimple, no wire stop

Material

Insulation -Nylon, UL 94V-2
Receptacle Body -Brass per ASTM B-36 or Phosphor Bronze per ASTM B-139
Plating -Tin per ASTM B-545 except where noted.
Metallic Sleeve -Copper per ASTM B-152
Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4
Packaging Quantities -pg. 4
Performance Specifications -pgs. 4 & 5
Application Tooling -pg. 67

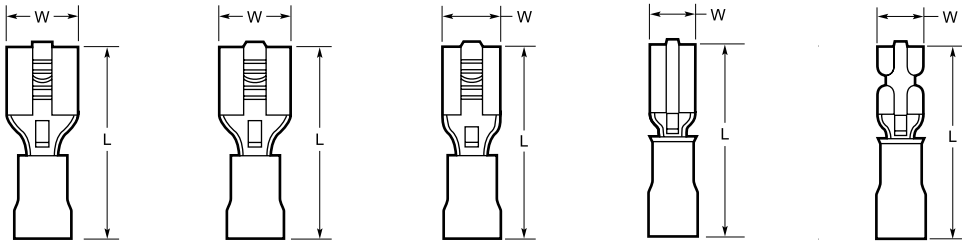

Series	Wire Size Circular Mils [mm²]	Style	Dimensions W Nom.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Recept. Matl.	Stock Thk.	Fits Tab Thk.	Part Numbers Loose Piece	Part Numbers Tape Mounted	Part Numbers Strip Form
.250	22-18 509-1,900 [0.26-0.96]	B	**.300** 7.62	**.900** 22.86	Red	**.140** 3.56	Brass	**.018** 0.46	**.032** 0.81	640903-1*	640903-2	640902-1
			.300 7.62	**.900** 22.86	Red	**.140** 3.56	Brass	**.018** 0.46	**.032** 0.81	55675-1[2]	55675-2[2]	—
	16-14 2,050-5,180 [1.04-2.62]	B	**.300** 7.62	**.900** 22.86	Blue	**.170** 4.32	Brass	**.018** 0.46	**.032** 0.81	640905-1*	640905-2	640904-1
	14-12 3,831-6,470[1] [1.94-3.28]	B	**.300** 7.62	**1.012** 25.70	Green	**.250** 6.35	Brass	**.018** 0.46	**.032** 0.81	42844-1*†	42844-3†	60544-3†
			.300 7.62	**1.012** 25.70	Green	**.250** 6.35	Phos. Brz.	**.018** 0.46	**.032** 0.81	42844-2*†	—	—
	12-10 5,180-13,100 [2.62-6.64]	B	**.300** 7.62	**1.012** 25.70	Yellow	**.250** 6.35	Brass	**.018** 0.46	**.032** 0.81	640907-1*	640907-2	640906-1
			.300 7.62	**1.012** 25.70	Yellow	**.250** 6.35	Phos. Brz.	**.018** 0.46	**.032** 0.81	61198-2	61198-4	—
.250 Low Insertion	22-18 509-1,900 [0.26-0.96]		**.300** 7.62	**.900** 22.86	Red	**.145** 3.68	Brass	**.016** .406	**.032** .813	184262-1	184262-2	184261-1
	16-14 2,050-5,180 [1.04-2.62]		**.300** 7.62	**.900** 22.86	Blue	**.173** 4.39	Brass	**.016** .406	**.032** .813	184265-1	184265-2	184264-1
.205	22-18 509-1,900 [0.26-0.96]	B	**.250** 6.35	**.800** 20.32	Red	**.135** 3.43	Brass	**.016** 0.41	**.020** 0.51	696018-1	696018-2	—
			.250 6.35	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.020** 0.51	640909-1*	640909-2	640908-1
			.250 6.35	**.800** 20.32	Red/Black	**.140** 3.56	Brass	**.016** 0.41	**.020** 0.51	640174-1	—	—
			.250 6.35	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.032** 0.81	640911-1*	640911-2	640910-1
	16-14 2,050-5,180 [1.04-2.62]	B	**.250** 6.35	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.020** 0.51	640913-1*	640913-2	—
			.250 6.35	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.032** 0.81	640915-1*	640915-2	—
.187	26-24 238-475 [0.12-0.24]	B	**.230** 5.84	**.700** 17.78	Yellow	**.082** 2.08	Brass	**.016** 0.41	**.020** 0.51	641321-1*†	641321-2†	641320-1†
	22-18 509-1,900 [0.26-0.96]	B	**.230** 5.84	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.020** 0.51	640917-1*	640917-2	640916-1
			.230 5.84	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.040** 1.02	—	640578-2†	—

†Not UL or CSA approved or listed.
*Available in small packaging quantities.
[1]Wire range is limited as noted.
[2]Unplated receptacle body.

Catalog 82042
Revised 07-08
www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425
South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG FASTON Terminals and Splices (Continued)

Reseptacles

(Continued)


Series	Wire Size Circular Mils [mm²]	Style	Dimensions W Nom.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Recept. Matl.	Stock Thk.	Fits Tab Thk.	Part Numbers Loose Piece	Part Numbers Tape Mounted	Part Numbers Strip Form
.187	16-14 2,050-5,180 [1.04-2.62]	B	**.230** 5.84	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.020** 0.51	640919-1*	640919-2	640918-1
			.230 5.84	**.900** 22.86	Blue	**.250** 6.35	Brass	**.016** 0.41	**.020** 0.51	696108-1	696108-2	—
.187 Low Insertion	22-18 509-1,900 [0.26-0.96]		**.230** 5.84	**.800** 22.86	Red	**.145** 3.68	Brass	**.016** .406	**.032** .813	184268-1	184268-2	184267-1
	16-14 2,050-5,180 [1.04-2.62]		**.300** 7.62	**.900** 22.86	Blue	**.173** 4.39	Brass	**.016** .406	**.032** .813	184235-1	184235-2	184234-1
.110 Standard	22-18 509-1,900 [0.26-0.96]	B	**.148** 3.76	**.734** 18.64	Natural	**.110** 2.79	Brass	**.012** 0.30	**.016** 0.41	61048-1*†	61048-2†	—
			.148 3.76	**.734** 18.64	Natural	**.110** 2.79	Brass	**.012** 0.30	**.020** 0.51	61060-1*†	61060-2†	61059-2†
			.148 3.76	**.734** 18.64	Natural	**.110** 2.79	Brass	**.012** 0.30	**.032** 0.81	60894-1*†	60894-2†	60893-2†
			.148 3.76	**.734** 18.64	Black	**.110** 2.79	Brass	**.012** 0.30	**.032** 0.81	—	61678-2†	—
.110 Standard Low Insertion	26-24 238-475 [0.12-0.24]	A	**.160** 4.06	**.700** 17.78	Yellow	**.082** 2.08	Brass	**.016** 0.41	**.020** 0.51	641324-1†	641324-2†	—
	22-18 509-1,900 [0.26-0.96]		**.160** 4.06	**.796** 20.22	Red	**.140** 3.56	Brass	**.016** 0.41	**.012** 0.30	—	—	350871-1†
			.160 4.06	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.016** 0.41	640921-1	640921-2	—
			.160 4.06	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.020** 0.51	640923-1*	640923-2	640922-1
			.160 4.06	**.800** 20.32	Red	**.140** 3.56	Brass	**.016** 0.41	**.032** 0.81	640925-1*	640925-2	640924-1
	16-14 2,050-5,180 [1.04-2.62]	A	**.160** 4.06	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.020** 0.51	640929-1*	640929-2	—
		A	**.160** 4.06	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.032** 0.81	640931-1*	640931-2	—
		B	**.160** 4.06	**.800** 20.32	Blue	**.170** 4.32	Brass	**.016** 0.41	**.016** 0.41	640927-1	640927-2	—
		C	**.160** 4.06	**.796** 20.19	Blue	**.170** 4.32	Brass	**.016** 0.41	**.032** 0.81	641317-1	—	—

†Not UL or CSA approved or listed.

*Available in small packaging quantities.

Receptacles

(Insulation Restricting)



.110 Series- Standard

.110 Series- Low Insertion

Material

Insulation -Nylon, UL 94V-2

Receptacle Body -Brass per ASTM B-36

Receptacle Style B -Dimple with wire stop

Plating -Tin per ASTM B-545

Metallic Sleeve -Copper per ASTM B-152

Plating -Tin per ASTM B-545 or Nickel per QQ-N-290

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling -pg. 67

Series	Wire Size Circular Mils [mm²]	Style	Dimensions W Nom.	Dimensions L Max.	Terminal Insulation Color Solid / Stripe	Wire Insulation Diameter Range	Recept. Matl.	Stock Thk.	Fits Tab Thk.	Part Numbers Loose Piece	Part Numbers Tape Mounted	Part Numbers Strip Form
.110 Standard	22 754 [0.38]	B	**.148** 3.76	**.780** 19.81	Red / Green	**.040-.080** 1.02-2.03	Brass	**.012** 0.30	**.016** 0.41	55319-1	55319-3	—

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PIDG FASTON Terminals and Splices (Continued)

Line Splice Connector for "250" Series Terminals



Material

Insulation -Vinyl, UL 94V-0

Color -Natural

Splice Body -Brass per ASTM B-36

Plating -Tin per ASTM B-545 except where noted.

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5


Wire Size	Plating	Dimensions W	Dimensions L Max.	Dimensions E Min.	Part Numbers Loose Piece
22-10	Unplated	**.391** 9.93	**2.093** 53.16	**.860** 21.84	321235*
	Tin	**.391** 9.93	**2.093** 53.16	**.860** 21.84	321688
	Unplated	**.409** 10.39	**2.625** 66.68	**1.151** 29.24	1-321235-0
	Tin	**.409** 10.39	**2.625** 66.68	**1.151** 29.24	1-321235-1
	Unplated	**.409** 10.39	**2.451** 62.26	**.970**[2] 24.64	1-321235-3[1]

*Available in small packaging quantities.


[1]Oval expansion at end opposite "w". (.380 x .320 inside diameter.)

[2]E min. on expansion end only.

Line Splice Connector for "187" Series Terminals



Single



Dual

Material

Housing -Nylon, UL 94V-2

Splice Body -Brass per ASTM B-36

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Type	Housing Color	Dimensions W	Dimensions L	Temperature Rating	Part Numbers Loose Piece
Single	Natural	**.345** 8.76	**1.750** 44.45	—	360035-1[†]
Dual	Natural	**.650** 16.51	**1.750** 44.45	105°C	360025-1[†]
Dual	Black	**.650** 16.51	**1.750** 44.45	150°C	360025-2[†]

[†]UL File E66717
600 V Max

Receptacle (Low Insertion Force)

Series	Wire Size Circular Mils [mm²]	Dimensions W Nom.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Recept. Matl.	Stock Thk.	Fits Tab Thk.	Part Numbers Loose Piece	Part Numbers Tape Mounted	Part Numbers Strip Form
.250 Low Insertion	22-18 509-1,900 [0.26-0.96]	**.300** 7.62	**.900** 22.86	Red	**.145** 3.68	Brass	**.016** .406	**.032** .813	184262-1	184262-2	184261-1
.250 Low Insertion	16-14 2,050-5,180 [1.04-2.62]	**.300** 7.62	**.900** 22.86	Blue	**.173** 4.39	Brass	**.016** .406	**.032** .813	184265-1	184265-2	184264-1
.187 Low Insertion	22-18 509-1,900 [0.26-0.96]	**.230** 5.84	**.800** 22.86	Red	**.145** 3.68	Brass	**.016** .406	**.032** .813	184268-1	184268-2	184267-1
.187 Low Insertion	16-14 2,050-5,180 [1.04-2.62]	**.300** 7.62	**.900** 22.86	Blue	**.173** 4.39	Brass	**.016** .406	**.032** .813	184235-1	184235-2	184234-1

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208


PLASTI-GRIP Terminals and Splices

Product Facts

- Pre-insulated PLASTI-GRIP solderless terminals and splices
- Designed specifically to answer the need for inexpensive, insulated electrical terminations
- Can be used in almost every type of commercial application
- Accommodate wire sizes from 22 AWG through 2/0 AWG

The Crimp

- Carefully engineered application tooling has been developed to ensure uniformly high quality terminations
- Tool and terminal have been designed as a team to promote ease and speed of application and at the same time to provide precise crimping pressure for every wire size
- The wire and the terminal barrel form a homogeneous mass of metal, providing a connection of maximum conductivity, tensile strength, and high resistance to corrosion
- The quality performance, the facility of installation and the inherent simplicity make them well-suited for many industrial applications

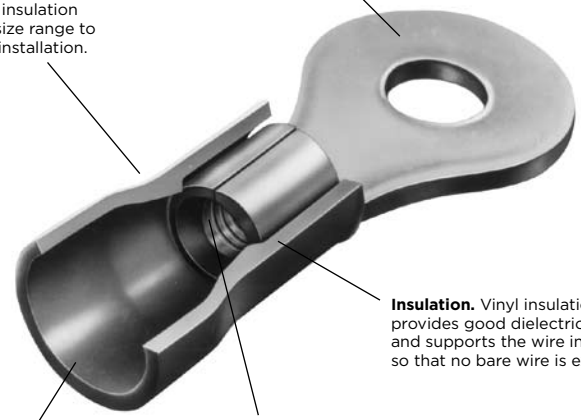

Temperature Rating: 90°C Max.

AMP PLASTI-GRIP Terminals and Splices (Use PLASTI-GRIP or PIDG Tooling)

AMP Wire Range	Listed	LR 7189 Certified	8 thru 4/0 600V
	Except as noted with individual part number listing.		
22-16	Terminals, Butt & Parallel Splices 22-16 Solid or Stranded[1]	600 V Max. (1000 V Fixture or Sign) 90°C Max.	Recognized under the component program of Underwriters Laboratories Incorporated File No. E13288
16-14	Terminals, Butt & Parallel Splices 16-14 Solid or Stranded[1]		
12-10	Terminals, Butt & Parallel Splices 12-10 Solid or Stranded[1]		

Note: 22-16 terminals and splices are stamped 22-18 in accordance with MIL-T-7928.

[1]Stranded wire only using TETRA-CRIMP tooling.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Ring Tongue Terminals



A

Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Style	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	2 M2	A	**.218** 5.54	**.156** 3.96	**.572** 14.53	**.684** 17.37	Red	**.140** 3.56	34140*	2-34140-1
		4	A	**.218** 5.54	**.156** 3.96	**.572** 14.53	**.684** 17.37	Red	**.125** 3.18	32944*	2-32944-1
				.218 5.54	**.156** 3.96	**.572** 14.53	**.684** 17.37	Red	**.140** 3.56	34141*	2-34141-1
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.140** 3.56	34143	2-34143-1
		6 M3.5	A	**.218** 5.54	**.156** 3.96	**.572** 14.53	**.684** 17.37	Red	**.125** 3.18	32945*	2-32945-1
				.218 5.54	**.156** 3.96	**.572** 14.53	**.684** 17.37	Red	**.140** 3.56	34142*	1-34142-1
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.125** 3.18	32947*	2-32947-1
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.140** 3.56	34144*	2-34144-1
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Black	**.140** 3.56	326819	2-326819-1
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.170** 4.32	—	2-35449-1
				.312 7.92	**.281** 7.14	**.697** 17.70	**.856** 21.74	Red	**.125** 3.18	32950	2-32950-1
				.312 7.92	**.281** 7.14	**.697** 17.70	**.856** 21.74	Red	**.140** 3.56	34147*	2-34147-1
		8 M4	A	**.281** 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.125** 3.18	32948*	2-32948-1
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.140** 3.56	34145*	2-34145-1
				.312 7.92	**.281** 7.14	**.697** 17.70	**.856** 21.74	Red	**.125** 3.18	32951*	2-32951-1
				.312 7.92	**.281** 7.14	**.697** 17.70	**.856** 21.74	Red	**.140** 3.56	34148*	2-34148-1
				.312 7.92	**.281** 7.14	**.746** 18.95	**.905** 22.99	Red	**.200** 5.08	—	2-34148-4
		10	A	**.281** 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.125** 3.18	32949*	2-32949-1
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.140** 3.56	34146*	2-34146-1
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Black	**.140** 3.56	2-34146-4	2-34146-5
				.281 7.14	**.250** 6.35	**.666** 16.92	**.809** 20.55	Red	**.170** 4.32	35451	2-35451-1
				.312 7.92	**.281** 7.14	**.697** 17.70	**.856** 21.74	Red	**.125** 3.18	32952*	2-32952-1
				.312 7.92	**.281** 7.14	**.697** 17.70	**.856** 21.74	Red	**.140** 3.56	34149*	2-34149-1
				.312 7.92	**.281** 7.14	**.746** 18.95	**.905** 22.99	Red	**.200** 5.08	—	2-34149-3
		1/4 M6	A	**.469** 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Red	**.125** 3.18	32953*	2-32953-1
				.469 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Red	**.140** 3.56	34150*	2-34150-1
				.469 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Black	**.140** 3.56	—	2-34150-3

*Available in small packaging quantities.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Ring Tongue Terminals

(Continued)

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Style	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
Note: "C" dimension applies from edge of metal wire barrel to center of stud hole. (Styles A & E).											
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	5/16 M8	A	**.469** 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Red	**.140** 3.56	34151*	2-34151-1
				.469 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Black	**.140** 3.56	—	2-34151-3
		3/8	A	**.531** 13.49	**.546** 13.87	**.962** 24.43	**1.230** 31.24	Red	**.140** 3.56	34152*	2-34152-2
				.531 13.49	**.546** 13.87	**.962** 24.43	**1.230** 31.24	Black	**.140** 3.56	—	2-34152-4
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	4	A	**.250** 6.35	**.171** 4.34	**.587** 14.91	**.715** 18.16	Blue	**.170** 4.32	34157*	2-34157-1
		6 M3.5	A	**.250** 6.35	**.171** 4.34	**.587** 14.91	**.715** 18.16	Blue	**.145** 3.68	32957*	2-32957-1
				.250 6.35	**.171** 4.34	**.587** 14.91	**.715** 18.16	Blue	**.170** 4.32	34158*	2-34158-1
				.343 8.71	**.281** 7.14	**.697** 17.70	**.871** 22.12	Blue	**.145** 3.68	32958*	2-32958-1
				.343 8.71	**.281** 7.14	**.697** 17.70	**.871** 22.12	Blue	**.170** 4.32	34159*	2-34159-1
		8 M4	A	**.312** 7.92	**.250** 6.35	**.666** 16.92	**.825** 20.96	Blue	**.170** 4.32	328527*	2-328527-1
				.343 8.71	**.281** 7.14	**.697** 17.70	**.871** 22.12	Blue	**.145** 3.68	32959*	2-32959-1
				.343 8.71	**.281** 7.14	**.697** 17.70	**.871** 22.12	Blue	**.170** 4.32	34160*	2-34160-1
				.343 8.71	**.281** 7.14	**.746** 18.95	**.920** 23.37	Blue	**.250** 6.35	2-34160-2	2-34160-3
		10	A	**.343** 8.71	**.281** 7.14	**.697** 17.70	**.871** 22.12	Blue	**.145** 3.68	32960*	2-32960-1
				.343 8.71	**.281** 7.14	**.697** 17.70	**.871** 22.12	Blue	**.170** 4.32	34161*	2-34161-1
				.343 8.71	**.281** 7.14	**.746** 18.95	**.920** 23.37	Blue	**.250** 6.35	2-34161-2	2-34161-3
				.343 8.71	**.281** 7.14	**.746** 18.95	**.920** 23.37	Black	**.250** 6.35	—	2-34959-1
				.468 11.89	**.312** 7.92	**.728** 18.49	**.965** 24.51	Blue	**.170** 4.32	—	2-34954-1
		1/4 M6	A	**.469** 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Blue	**.145** 3.68	32961*	2-32961-1
				.469 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Blue	**.170** 4.32	34162*	2-34162-1
				.469 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Black	**.170** 4.32	2-34162-2	2-34162-3
		5/16 M8	A	**.469** 11.91	**.437** 11.10	**.853** 21.67	**1.090** 27.69	Blue	**.170** 4.32	34163*	2-34163-1
		3/8	A	**.531** 13.49	**.546** 13.87	**.962** 24.43	**1.248** 31.70	Blue	**.170** 4.32	34164*	2-34164-2
				.531 13.49	**.546** 13.87	**.962** 24.43	**1.248** 31.70	Black	**.170** 4.32	—	2-34164-4
16-14HD[1] 2,050-5,180 [1.04-2.62]	**.050** 1.27	6 M3.5	A	**.281** 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow/Blk.	**.200** 5.08	34821	2-34821-1
		8 M4	A	**.343** 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow/Blk.	**.200** 5.08	34822†	—
		10	A	**.343** 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow/Blk.	**.200** 5.08	34823*†	2-34823-1†
				.343 8.71	**.281** 7.14	**.872** 22.15	**1.046** 26.57	Yellow/Blk.	**.250** 6.35	321518	2-321518-1

† Not UL or CSA Approved or Listed.

*Available in small packaging quantities.

[1]Heavy Duty for extra mechanical strength.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole. (Styles A & E).

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Ring Tongue Terminals

(Continued)



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications - pgs. 4 & 5

Application Tooling - pgs. 66 & 67

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Style	Dimensions W	C Min.	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
16-14HD[1] 2,050-5,180 [1.04-2.62]	**.050** 1.27	1/4 M6	A	**.500** 12.70	**.344** 8.74	**.935** 23.75	**1.188** 30.18	Yellow/Blk.	**.230** 5.84	35349	2-35349-1
				.531 13.49	**.437** 11.10	**1.028** 26.11	**1.296** 32.92	Yellow/Blk.	**.200** 5.08	34824	2-34824-3
		5/16 M8	A	**.531** 13.49	**.437** 11.10	**1.028** 26.11	**1.296** 32.92	Yellow/Blk.	**.200** 5.08	34825	—
		3/8	A	**.750** 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow/Blk.	**.200** 5.08	34826	—
		1/2 M12	A	**.750** 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow/Blk.	**.200** 5.08	34827	—
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	0	A	**.281** 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow	**.250** 6.35	2-34835-4	—
		4	A	**.281** 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow	**.250** 6.35	34835	2-34835-1
		6 M3.5	A	**.281** 7.14	**.219** 5.56	**.810** 20.57	**.953** 24.21	Yellow	**.250** 6.35	34852*	2-34852-1
				.375 9.53	**.302** 7.67	**.893** 22.68	**1.098** 27.89	Yellow	**.230** 5.84	34168*	2-34168-1
		8 M4	A	**.312** 7.92	**.302** 7.67	**.893** 22.68	**1.062** 26.97	Yellow	**.250** 6.35	—	696047-1
				.312 7.92	**.302** 7.67	**.893** 22.68	**1.062** 26.97	Yellow	**.250** 6.35	—	696048-1
				.375 9.53	**.302** 7.67	**.893** 22.68	**1.098** 27.89	Yellow	**.230** 5.84	34169*	2-34169-1
				.375 9.53	**.302** 7.67	**.893** 22.68	**1.098** 27.89	Yellow	**.250** 6.35	34853*	2-34853-1
		10	A	**.312** 7.92	**.302** 7.67	**.893** 22.68	**1.052** 26.72	Yellow	**.230** 5.84	330518	—
				.312 7.92	**.302** 7.67	**.953** 24.21	**1.111** 28.22	Yellow	**.300** 7.62 12-10	—	1-330518-2
				.375 9.53	**.302** 7.67	**.893** 22.68	**1.083** 27.51	Black	**.250** 6.35	—	2-328261-1
				.375 9.53	**.302** 7.67	**.893** 22.68	**1.098** 27.89	Yellow	**.230** 5.84	34170*	2-34170-1
				.375 9.53	**.302** 7.67	**.893** 22.68	**1.098** 27.89	Yellow	**.250** 6.35	34854*	2-34854-1
		1/4 M6	E	**.400** 10.16	**.468** 11.89	**1.118** 28.40	**1.373** 34.87	Yellow	**.300** 7.62	55678-1	55678-2
			A	**.500** 12.70	**.344** 8.74	**.994** 25.25	**1.247** 31.67	Black	**.300** 7.62	35492	—
				.531 13.49	**.468** 11.89	**1.059** 26.90	**1.327** 33.71	Yellow	**.230** 5.84	34171*	2-34171-1
				.531 13.49	**.468** 11.89	**1.059** 26.90	**1.327** 33.71	Yellow	**.250** 6.35	34855*	2-34855-1
		5/16 M8	A	**.531** 13.49	**.468** 11.89	**1.059** 26.90	**1.327** 33.71	Yellow	**.230** 5.84	34172*	2-34172-1
				.531 13.49	**.468** 11.89	**1.059** 26.90	**1.327** 33.71	Black	**.230** 5.84	—	2-34172-3
				.531 13.49	**.468** 11.89	**1.059** 26.90	**1.327** 33.71	Yellow	**.250** 6.35	34856*	2-34856-1
		3/8	A	**.593** 15.06	**.531** 13.49	**1.122** 28.50	**1.421** 36.09	Yellow	**.230** 5.84	34173*	2-34173-1
		1/2 M12	A	**.750** 19.05	**.625** 15.88	**1.216** 30.89	**1.594** 40.49	Yellow	**.250** 6.35	34837*	2-34837-4

*Available in small packaging quantities. [1]Heavy Duty for extra mechanical strength.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole. (Styles A & E).

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Ring Tongue Terminals

(Continued)

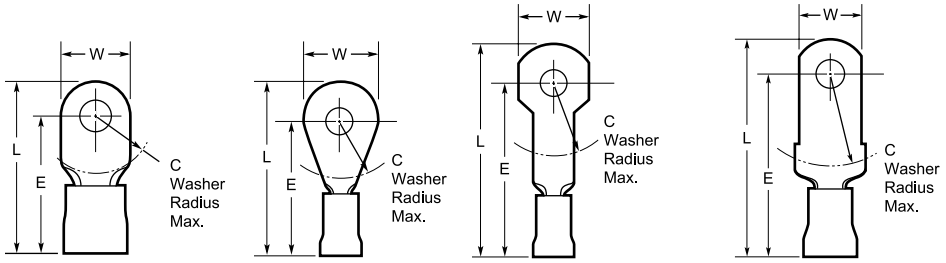

B C D F

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Style	Dimensions W	Dimensions C	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
8 13,100-20,800 [6.64-10.5]	**.043** 1.09	8 M4	C	**.478** 12.14	**.437** 11.10	**1.344** 34.14	**1.586** 40.28	Red	**.360** 9.14	52041	52041-6
		10	D	**.430** 10.92	**.437** 11.10	**1.363** 34.62	**1.605** 40.77	Red	**.360** 9.14	—	54351-2
			B	**.431** 10.95	**.437** 11.10	**1.338** 33.99	**1.556** 39.52	Red	**.360** 9.14	52263	52263-2
				.431 10.95	**.437** 11.10	**1.338** 33.99	**1.556** 39.52	Red	**.390** 9.91	52263-5	52263-4
				.431 10.95	**.437** 11.10	**1.358** 34.49	**1.576** 40.03	Red	**.330** 8.38	52263-1	52263-3
		1/4 M6	C	**.431** 10.95	**.437** 11.10	**1.303** 33.10	**1.561** 39.65	Red	**.360** 9.14	55621-1	55621-2
				.478 12.14	**.437** 11.10	**1.344** 34.14	**1.586** 40.28	Red	**.360** 9.14	52041-1	52041-7
				.478 12.14	**.437** 11.10	**1.358** 34.49	**1.600** 40.64	Red	**.330** 8.38	52041-3*	52041-9
		5/16 M8	C	**.587** 14.91	**.500** 12.70	**1.400** 35.56	**1.696** 43.08	Red	**.360** 9.14	52291*	52291-4
		3/8	C	**.587** 14.91	**.500** 12.70	**1.400** 35.56	**1.696** 43.08	Red	**.360** 9.14	52291-1*	52291-5
		1/2 M12	A	**.875** 22.23	**.625** 15.88	**1.420** 36.07	**1.860** 47.24	Red	**.330** 8.38	52262-1	—
6 20,800-33,100 [10.5-16.8]	**.048** 1.22	8 M4	C	**.500** 12.70	**.515** 13.08	**1.591** 40.41	**1.844** 46.84	Blue	**.436** 11.07	52042	—
				.500 12.70	**.515** 13.08	**1.591** 40.41	**1.869** 47.47	Blue	**.360** 9.14	52042-2	—
		10	B	**.468** 11.89	**.421** 10.69	**1.482** 37.64	**1.719** 43.66	Blue	**.360** 9.14	—	52265-4
				.468 11.89	**.421** 10.69	**1.482** 37.64	**1.719** 43.66	Blue	**.436** 11.07	52265*	52265-3
			C	**.500** 12.70	**.515** 13.08	**1.591** 40.41	**1.844** 46.84	Blue	**.436** 11.07	52042-4	—
				.500 12.70	**.515** 13.08	**1.591** 40.41	**1.869** 47.47	Blue	**.360** 9.14	52042-5*	—
		1/4 M6	F	**.398** 10.11	**.515** 13.08	**1.591** 40.41	**1.846** 46.89	Blue	**.450** 11.43	55679-1	55679-2
			C	**.500** 12.70	**.515** 13.08	**1.591** 40.41	**1.844** 46.84	Blue	**.436** 11.07	52042-1	52042-7
				.500 12.70	**.515** 13.08	**1.591** 40.41	**1.869** 47.47	Blue	**.360** 9.14	52042-3*	52042-9
		5/16 M8	B	**.625** 15.88	**.515** 13.08	**1.591** 40.41	**1.906** 48.41	Blue	**.450** 11.43	52264*	52264-4
		3/8	B	**.625** 15.88	**.515** 13.08	**1.591** 40.41	**1.906** 48.41	Blue	**.450** 11.43	52264-1*	52264-5
		1/2 M12	C	**.815** 20.70	**.515** 13.08	**1.441** 36.60	**1.851** 47.02	Blue	**.436** 11.07	52350*	—

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole. (Styles A & E).

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Ring Tongue Terminals
(Continued)



B

Material
Insulation -Vinyl, UL 94V-0
Terminal Body -Copper per ASTM B-152
Plating -Tin per ASTM B-545

Related Product Data
Insulation Color Code -pg. 4
Packaging Quantities -pg. 4
Performance Specifications -pgs. 4 & 5
Application Tooling -pg. 67

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Style	Dimensions W	C	E Max.	L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
4 33,100-52,600 [16.8-26.7]	**.051** 1.30	10	B	**.546** 13.87	**.531** 13.49	**1.672** 42.47	**1.948** 49.48	Yellow	**.450** 11.43	52043-2	—
				.546 13.87	**.531** 13.49	**1.672** 42.47	**1.948** 49.48	Yellow	**.515** 13.08	52043	52043-4
		1/4 M6	B	**.391** 9.93	**.531** 13.49	**1.672** 42.47	**1.927** 48.95	Yellow	**.450** 11.43	—	55680-2
				.546 13.87	**.531** 13.49	**1.672** 42.47	**1.948** 49.48	Yellow	**.450** 11.43	52043-3*	52043-7
				.546 13.87	**.531** 13.49	**1.672** 42.47	**1.948** 49.48	Yellow	**.515** 13.08	52043-1	52043-5
		5/16 M8	B	**.679** 17.25	**.531** 13.49	**1.672** 42.47	**2.014** 51.16	Yellow	**.450** 11.43	52266-3	52266-9
				.679 17.25	**.531** 13.49	**1.672** 42.47	**2.014** 51.16	Yellow	**.515** 13.08	52266	—
		3/8	B	**.679** 17.25	**.531** 13.49	**1.672** 42.47	**2.014** 51.16	Yellow	**.450** 11.43	52266-4*	1-52266-0
				.679 17.25	**.531** 13.49	**1.672** 42.47	**2.014** 51.16	Yellow	**.515** 13.08	52266-1	—
2 52,600-83,700 [26.7-42.4]	**.060** 1.52	1/4 M6	B	**.675** 17.15	**.578** 14.68	**1.731** 43.97	**2.071** 52.60	Red	**.560** 14.22	52267-1	—
				.675 17.15	**.578** 14.68	**1.731** 43.97	**2.071** 52.60	Red	**.632** 16.05	52267	—
		5/16 M8	B	**.711** 18.06	**.578** 14.68	**1.731** 43.97	**2.089** 53.06	Red	**.560** 14.22	52044-4	—
				.711 18.06	**.578** 14.68	**1.731** 43.97	**2.089** 53.06	Red	**.632** 16.05	52044-1	—
		3/8	B	**.711** 18.06	**.578** 14.68	**1.731** 43.97	**2.089** 53.06	Red	**.560** 14.22	52044-5	—
				.711 18.06	**.578** 14.68	**1.731** 43.97	**2.089** 53.06	Red	**.632** 16.05	52044-2	—
1/0 83,700-119,500 [42.4-60.6]	**.073** 1.85	5/16 M8	B	**.807** 20.50	**.625** 15.88	**2.041** 51.84	**2.447** 62.15	Blue	**.684** 17.37	52045-1	—
		3/8	B	**.807** 20.50	**.625** 15.88	**2.041** 51.84	**2.447** 62.15	Blue	**.665** 16.89	52045-5	—
				.807 20.50	**.625** 15.88	**2.041** 51.84	**2.447** 62.15	Blue	**.684** 17.37	52045-2	—
		1/2 M12	B	**.875** 22.23	**.625** 15.88	**2.041** 51.84	**2.478** 62.94	Blue	**.684** 17.37	52289	—
2/0 119,500-150,500 [60.6-76.3]	**.083** 2.11	5/16 M8	B	**.926** 23.52	**.625** 15.88	**2.082** 52.88	**2.477** 62.92	Yellow	**.775** 19.69	52046-1	—

*Available in small packaging quantities.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Ring Tongue 90° Bend Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4


Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling -pg. 67

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions D Min.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece
8 13,100-20,800 [6.64-10.5]	**.043** 1.09	10	**.431** 10.95	**.311** 7.90	Red	**.360** 9.14	55654-1
		1/4 M6	**.478** 12.14	**.435** 11.05	Red	**.360** 9.14	54725-1
6 20,800-33,100 [10.5-16.8]	**.048** 1.22	10	**.500** 12.70	**.310** 7.87	Blue	**.436** 11.07	54753-1
		1/4 M6	**.500** 12.70	**.379** 9.63	Blue	**.436** 11.07	54754-1

Rectangular Tongue Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling -pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Dimensions X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.249** 6.32	**.312** 7.92	**.728** 18.49	**.868** 22.05	**.125** 3.18	Blue	**.145** 3.68	34898	—

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Spade Tongue Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	6 M3.5	**.250** 6.35	**.312** 7.92	**.728** 18.49	**.858** 21.79	**.125** 3.18	Red	**.140** 3.56	327043*	2-327043-1
			.297 7.54	**.203** 5.16	**.619** 15.72	**.765** 19.43	**.141** 3.58	Red	**.125** 3.18	327735*	2-327735-1
			.297 7.54	**.203** 5.16	**.619** 15.72	**.765** 19.43	**.141** 3.58	Red	**.140** 3.56	320665*	2-320665-1
		8 M4	**.307** 7.80	**.245** 6.22	**.661** 16.79	**.836** 21.23	**.175** 4.45	Red	**.140** 3.56	696003-1	696003-2
			.375 9.53	**.312** 7.92	**.728** 18.49	**.920** 23.37	**.187** 4.75	Red	**.120** 3.18		2-32981-1
			.375 9.53	**.312** 7.92	**.728** 18.49	**.920** 23.37	**.187** 4.75	Red	**.140** 3.56	34155*	2-34155-1
		10	**.375** 9.53	**.312** 7.92	**.728** 18.49	**.920** 23.37	**.187** 4.75	Red	**.140** 3.56	34156*	2-34156-1
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	5	**.237** 6.02	**.312** 7.92	**.728** 18.49	**.865** 21.97	**.125** 3.18	Blue	**.145** 3.68	696006-1†	—
		6 M3.5	**.297** 7.54	**.203** 5.16	**.619** 15.72	**.765** 19.43	**.141** 3.58	Blue	**.145** 3.68	322994*	2-322994-1
			.297 7.54	**.203** 5.16	**.619** 15.72	**.765** 19.43	**.141** 3.58	Blue	**.170** 4.32	54367-1	54367-2
			.385 9.78	**.312** 7.92	**.728** 18.49	**.920** 23.37	**.187** 4.75	Blue	**.170** 4.32	34165*	—
		8 M4	**.297** 7.54	**.203** 5.16	**.619** 15.72	**.765** 19.43	**.141** 3.58	Blue	**.170** 4.32	326741	2-326741-1
			.307 7.80	**.245** 6.22	**.661** 16.79	**.836** 21.23	**.175** 4.45	Blue	**.170** 4.32	696024-1	696024-2
			.385 9.78	**.312** 7.92	**.728** 18.49	**.920** 23.37	**.187** 4.75	Blue	**.170** 4.32	34166*	2-34166-1
		10	**.385** 9.78	**.312** 7.92	**.728** 18.49	**.920** 23.37	**.187** 4.75	Blue	**.170** 4.32	34167*	2-34167-1
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	5	**.237** 6.02	**.296** 7.52	**.887** 22.53	**1.095** 27.81	**.203** 5.16	Yellow	**.230** 5.84	696007-1†	—
		10	**.406** 10.31	**.296** 7.52	**.887** 22.53	**1.095** 27.81	**.203** 5.16	Yellow	**.230** 5.84	34176*	2-34176-1

*Available in small packaging quantities.

† Gold

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Flanged Spade Tongue Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions						Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers	
			W	C Min.	E Max.	L Max.	X	H Min.			Loose Piece	Tape Mounted
22-16 509-3,260 [0.26-1.65]	.033 0.84	6 M3.5	**.296** 7.52	**.203** 5.16	**.619** 15.72	**.749** 19.02	**.125** 3.18	**.045** 1.14	Red	**.140** 3.56	322249*	1-322249-1
			.328 8.33	**.203** 5.16	**.619** 15.72	**.749** 19.02	**.125** 3.18	**.045** 1.14	Red	**.140** 3.56	324560	2-324560-1
		8 M4	**.296** 7.52	**.203** 5.16	**.619** 15.72	**.749** 19.02	**.125** 3.18	**.045** 1.14	Red	**.140** 3.56	1-322249-0	1-322249-9
			.416 10.57	**.250** 6.35	**.666** 16.92	**.842** 21.39	**.171** 4.34	**.062** 1.57	Red	**.140** 3.56	324169*	2-324169-1
		10	**.296** 7.52	**.203** 5.16	**.619** 15.72	**.749** 19.02	**.125** 3.18	**.045** 1.14	Red	**.140** 3.56	328516*	2-328516-1
16-14 2,050-5,180 [1.04-2.62]	.033 0.84	6 M3.5	**.294** 7.47	**.203** 5.16	**.619** 15.72	**.749** 19.02	**.125** 3.18	**.047** 1.19	Blue	**.170** 4.32	324165*	2-324165-1
			.294 7.47	**.203** 5.16	**.668** 16.97	**.798** 20.27	**.125** 3.18	**.047** 1.19	Blue	**.250** 6.35	—	2-324165-4
		8 M4	**.294** 7.47	**.203** 5.16	**.619** 15.72	**.749** 19.02	**.125** 3.18	**.047** 1.19	Blue	**.170** 4.32	53874-1	53874-2
			.416 10.57	**.250** 6.35	**.666** 16.92	**.842** 21.39	**.171** 4.34	**.062** 1.57	Blue	**.170** 4.32	324170	2-324170-1
12-10 5,180-13,100 [2.62-6.64]	.042 1.07	6 M3.5	**.296** 7.52	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.230** 5.84	324581*	1-324581-1
		8 M4	**.416** 10.57	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.230** 5.84	324172*	1-324172-0
		10	**.416** 10.57	**.250** 6.35	**.841** 21.36	**1.017** 25.83	**.171** 4.34	**.052** 1.32	Yellow	**.250** 6.35	52856	52856-1

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Short Spring Spade Tongue Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Phosphor Bronze per ASTM B-139 for wire sizes 24 to 14
Brass per ASTM B-36 for wire sizes 12 to 10

Plating -Tin per ASTM B-545 except where noted

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Tape Mounted
24-20 320-1,290 [0.16-0.65]	**.025** 0.64	4	**.203** 5.16	**.219** 5.56	**.624** 15.85	**.744** 18.90	**.115** 2.92	White	**.125** 3.18	—	53829-2
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	4	**.203** 5.16	**.250** 6.35	**.666** 16.92	**.811** 20.60	**.140** 3.56	Red	**.140** 3.56	52947*	52947-1
		5 M3	**.250** 6.35	**.250** 6.35	**.666** 16.92	**.811** 20.60	**.140** 3.56	Red	**.140** 3.56	52948*	52948-1
		6 M3.5	**.234** 5.94	**.250** 6.35	**.666** 16.92	**.811** 20.60	**.140** 3.56	Red	**.140** 3.56	53240-1*	53240-2
			.250 6.35	**.250** 6.35	**.666** 16.92	**.811** 20.60	**.140** 3.56	Red	**.140** 3.56	52949*	52949-1
			.250 6.35	**.250** 6.35	**.715** 18.16	**.860** 21.84	**.140** 3.56	Red	**.200** 5.08	52949-2	52949-3
		8 M4	**.244** 6.20	**.281** 7.14	**.697** 17.70	**.872** 22.15	**.170** 4.32	Red	**.140** 3.56	53241-1	53241-2
			.375 9.53	**.281** 7.14	**.697** 17.70	**.872** 22.15	**.170** 4.32	Red	**.140** 3.56	52950*	52950-1
			.375 9.53	**.281** 7.14	**.746** 18.95	**.921** 23.39	**.170** 4.32	Red	**.200** 5.08	52950-2	52950-3
		10	**.294** 7.47	**.281** 7.14	**.697** 17.70	**.920** 23.37	**.218** 5.54	Red	**.140** 3.56	53242-1*	53242-2
			.294 7.47	**.281** 7.14	**.746** 18.95	**.969** 24.61	**.218** 5.54	Red	**.200** 5.08	53242-5	53242-6
			.406 10.31	**.281** 7.14	**.697** 17.70	**.920** 23.37	**.218** 5.54	Red	**.140** 3.56	52951*	52951-1
			.406 10.31	**.281** 7.14	**.746** 18.95	**.969** 24.61	**.218** 5.54	Red	**.200** 5.08	—	52951-3
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6 M3.5	**.250** 6.35	**.250** 6.35	**.666** 16.92	**.811** 20.60	**.140** 3.56	Blue	**.170** 4.32	52955*	52955-1
			.250 6.35	**.250** 6.35	**.715** 18.16	**.860** 21.84	**.140** 3.56	Blue	**.250** 6.35	52955-2	52955-3
			.250 6.35	**.250** 6.35	**.715** 18.16	**.860** 21.84	**.140** 3.56	Blue	**.250** 6.35	52955-4[1]	—
		8 M4	**.244** 6.20	**.281** 7.14	**.697** 17.70	**.872** 22.15	**.170** 4.32	Blue	**.170** 4.32	53244-1*	53244-2
			.244 6.20	**.281** 7.14	**.746** 18.95	**.921** 23.39	**.170** 4.32	Blue	**.250** 6.35	—	53244-4
			.375 9.53	**.281** 7.14	**.697** 17.70	**.872** 22.15	**.170** 4.32	Blue	**.170** 4.32	52956*	52956-1
			.375 9.53	**.281** 7.14	**.746** 18.95	**.921** 23.39	**.170** 4.32	Blue	**.250** 6.35	52956-2*	52956-3
		10	**.294** 7.47	**.281** 7.14	**.697** 17.70	**.920** 23.37	**.218** 5.54	Blue	**.170** 4.32	53245-1	53245-2
			.294 7.47	**.281** 7.14	**.746** 18.95	**.969** 24.61	**.218** 5.54	Blue	**.250** 6.35	—	53245-6
			.406 10.31	**.281** 7.14	**.697** 17.70	**.920** 23.37	**.218** 5.54	Blue	**.170** 4.32	52957*	52957-1
			.406 10.31	**.281** 7.14	**.746** 18.95	**.969** 24.61	**.218** 5.54	Blue	**.250** 6.35	52957-2	52957-3

*Available in small packaging quantities.

[1]Terminal body plating — Gold per MIL-G-45204 over Nickel per QQ-N-290.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Short Spring Spade Tongue Terminals
(Continued)


Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
12-10 5,180-13,100 [2.62-6.64]	.042 1.07	6 M3.5	.250 6.35	.174 4.42	.775 19.69	.959 24.36	.179 4.55	Yellow	.200 5.08	52961*	52961-1
			.250 6.35	.174 4.42	.775 19.69	.959 24.36	.179 4.55	Yellow	.250 6.35	53246-1*	53246-2
			.250 6.35	.174 4.42	.775 19.69	.959 24.36	.179 4.55	Yellow	.250 6.35	53246-3[1]	—
		8 M4	.312 7.92	.276 7.01	.877 22.28	1.052 26.72	.170 4.32	Yellow	.250 6.35	53247-1*	53247-2
			.375 9.53	.276 7.01	.877 22.28	1.052 26.72	.170 4.32	Yellow	.200 5.08	52962*	52962-1
			.375 9.53	.276 7.01	.936 23.77	1.111 28.22	.170 4.32	Yellow	.300 7.62	52962-2	52962-3
		10	.312 7.92	.276 7.01	.877 22.28	1.100 27.94	.218 5.54	Yellow	.250 6.35	53248-1	53248-2
			.406 10.31	.276 7.01	.877 22.28	1.100 27.94	.218 5.54	Yellow	.200 5.08	52963	52963-1
			.406 10.31	.276 7.01	.877 22.28	1.100 27.94	.218 5.54	Yellow	.250 6.35	52963-2*	52963-3
			.406 10.31	.276 7.01	.936 23.77	1.159 29.44	.218 5.54	Yellow	.300 7.62	52963-4	52963-5

*Available in small packaging quantities.

[1]Terminal body plating — Gold per MIL-G-45204 over Nickel per QQ-N-290.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Long Spring Spade Tongue Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Phosphor Bronze per ASTM B-139 for wire sizes 22 to 14
Brass per ASTM B-36 for wire sizes 12 to 10

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	C Min.	E Max.	L Max.	X	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	.033 0.84	6 M3.5	.250 6.35	.238 6.05	.664 16.87	.945 24.00	.276 7.01	Red	.140 3.56	52453*	52453-1
		8 M4	.281 7.14	.270 6.86	.696 17.68	.991 25.17	.290 7.37	Red	.140 3.56	52454*	52454-1
		10	.343 8.71	.283 7.19	.709 18.01	1.017 25.83	.303 7.70	Red	.140 3.56	52455*	52455-1
16-14 2,050-5,180 [1.04-2.62]	.033 0.84	6 M3.5	.250 6.35	.238 6.05	.664 16.87	.945 24.00	.276 7.01	Blue	.170 4.32	52463*	52463-1
		8 M4	.281 7.14	.270 6.86	.696 17.68	.991 25.17	.290 7.37	Blue	.170 4.32	52464*	52464-1
		10	.343 8.71	.283 7.19	.709 18.01	1.017 25.83	.303 7.70	Blue	.170 4.32	52465*	52465-1
12-10 5,180-13,100 [2.62-6.64]	.042 1.07	8 M4	.375 9.53	.273 6.93	.874 22.20	1.174 29.82	.295 7.49	Yellow	.200 5.08	52474	52474-1
		10	.375 9.53	.305 7.75	.906 23.01	1.219 30.96	.308 7.82	Yellow	.200 5.08	52475	52475-1
			.375 9.53	.305 7.75	.965 24.51	1.278 32.46	.308 7.82	Yellow	.300 7.62	—	52475-3

*Available in small packaging quantities.

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Slotted Ring Tongue Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4


Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	6 M3.5	**.218** 5.54	**.156** 3.96	**.572** 14.53	**.658** 16.71	Red	**.125** 3.18	34090	—
		8 M4	**.281** 7.14	**.250** 6.35	**.666** 16.92	**.782** 19.86	Red	**.140** 3.56	324184	2-324184-1

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Hook Tongue Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5


Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	8 M4	**.343** 8.71	**.281** 7.14	**.697** 17.70	**.871** 22.12	Blue	**.170** 4.32	320263	2-320263-1

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

PLASTI-GRIP Terminals and Splices (Continued)

Flag Tongue Terminals



Material

Insulation -Vinyl, UL 94V-0

Color -Natural

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4


Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Style	Stud Size	Dimensions W	Dimensions C Min.	Dimensions L Max.	Dimensions D Max.	Terminal Insulation Stripe Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece
20-16HD[1] 810-3,260 [0.41-1.65]	**.042** 1.07	A	14	**.500** 12.70	**.266** 6.76	**.749** 19.02	**.695** 17.65	Green	**.170** 4.32	322307
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	B	10	**.385** 9.78	**.272** 6.91	**.741** 18.82	**.695** 17.65	Blue	**.170** 4.32	322834
		A	14	**.500** 12.70	**.266** 6.76	**.749** 19.02	**.695** 17.65	Blue	**.170** 4.32	322310
16-14HD[1] 2,050-5,180 [1.04-2.62]	**.050** 1.27	A	10	**.500** 12.70	**.266** 6.76	**.810** 20.57	**.775** 19.69	Black	**.230** 5.84	322312
			14	**.500** 12.70	**.266** 6.76	**.810** 20.57	**.775** 19.69	Black	**.230** 5.84	322313
12-10 5,180-13,100 [2.62-6.64]	**.042** 1.07	A	10	**.500** 12.70	**.266** 6.76	**.812** 20.62	**.775** 19.69	Yellow	**.230** 5.84	322315
			14	**.500** 12.70	**.266** 6.76	**.812** 20.62	**.775** 19.69	Yellow	**.230** 5.84	322316
			14	**.500** 12.70	**.266** 6.76	**.812** 20.62	**.775** 19.69	Yellow	**.280** 7.11	322395

[1]Heavy Duty for extra mechanical strength.

Multiple Stud Terminals



Material

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C Min.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	6-8-10	**.325** 8.26	**.271** 6.88	**.691** 17.55	**.969** 24.61	Red	**.125** 3.18	54774-1	54774-2
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	6-8-10	**.325** 8.26	**.271** 6.88	**.691** 17.55	**.969** 24.61	Blue	**.145** 3.68	54775-1	54775-2

Note: "C" dimension applies from edge of metal wire barrel to center of stud hole.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Butt Splices



Material

Insulation -Vinyl, UL 94V-0

Splice Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils[1] [mm²]	Dimension L Max.	Splice Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
26-22 202-810 [0.10-0.41]	**.620** 15.75	Yellow	**.080** 2.03	321026*†	2-321026-1†
22-18/16-14	**1.065** 27.05	Red/Blue Stripe	**.170 / .115** 6.86 / 2.92	696010-1	—
22-16[2] 509-3,260 [0.26-1.65]	**1.065** 27.05	Red	**.120** 3.05	34067*	2-34067-1
	1.065 27.05	Red	**.170** 4.32	34243*	1-34243-1
	1.076 27.33	Natural w/ Red Letters	**.120** 3.05	324138*	—
	1.076 27.33	Red	**.140** 3.56	34070*	1-34070-1
	1.076 27.33	Natural w/ Red Stripes	**.140** 3.56	55792-1*	55792-2
	1.065 27.05	Red	**.083 x .171** 2.11 x 4.34	34203[3]*	—
16-14 2,050-5,180 [1.04-2.62]	**.600** 15.24	Blue	—	55629-2	—
	1.065 27.05	Blue	**.140** 3.56	34068*	2-34068-1
	1.065 27.05	Natural w/ Blue Letters	**.140** 3.56	328427*	—
	1.065 27.05	Blue	**.170** 4.32	34071*	2-34071-1
	1.065 27.05	Natural w/ Blue Stripes	**.170** 4.32	55785-1*	55785-2
	1.065 27.05	Blue	**.215** 5.46	35244*	2-35244-1
	1.105 28.07	Blue	**.170** 4.32	2-34071-2[4]	2-34071-3[4]
	1.065 27.05	Blue	**.135 x .245** 3.43 x 6.22	34204[3]*	1-34204-0
12-10 5,180-13,100 [2.62-6.64]	**1.160** 29.46	Yellow	**.200** 5.08	34069	—
	1.160 29.46	Yellow	**.230** 5.84	34072*	2-34072-2
	1.160 29.46	Natural w/ Yellow Stripes	**.230** 5.84	55793-1*	55793-2
	1.160 29.46	Yellow	**.250** 6.35	34945*	—
	1.160 29.46	Yellow	**.300** 7.62	326742	—
	1.200 30.48	Yellow	**.250** 6.35	2-34945-1[4]	2-34945-2[4]
	1.160 29.46	Yellow	**.250 / .165 x .315** 6.35 / 4.19 x 8.00	321286[5]†	—
	1.160 29.46	Yellow	**.138 x .281** 3.51 x 7.14	34205[3]*	—
8	**1.340** 34.04	Red	**.250** 6.35	696025-1	—
6	**1.530** 38.86	Blue	**.330** 8.38	696026-1	—

† Not UL or CSA Approved or Listed.

*Available in small packaging quantities.

[1]When using two or more wires in either end of a butt splice, the combined cross sectional area must be within the (CMA) circular mil range listed. (Not UL or CSA approved with use of multiple wires.)

[2]22-16 splices are 22-18 range in accordance with MIL-T-7928.

[3]Oval expansion.

[4]Funnel entry

[5]Oval expansion at one end; circular expansion at other end.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

Parallel Splices



Material

Insulation -Vinyl, UL 94V-0

Splice Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils[1] [mm²]	Dimension L Max.	Splice Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece
22-16 509-3,260 [0.26-1.65]	**.760** 19.30	Red	**.120** 3.05	34131*
	.760 19.30	Red	**.140** 3.56	34132*
16-14 2,050-5,180 [1.04-2.62]	**.760** 19.30	Blue	**.140** 3.56	34133*
	.760 19.30	Blue	**.170** 4.32	34134*
	.760 19.30	Blue	**.135 x .245** 3.43 x 6.22	34207[2]*
12-10 5,180-13,100 [2.62-6.64]	**.843** 21.41	Yellow	**.200** 5.08	34135
	.870 22.10	Yellow	**.230** 5.84	34136*


*Available in small packaging quantities.

[1]When using two or more wires in a parallel splice, the combined cross sectional area must be within the (CMA) circular mil area listed.


[2]Oval expansion.

Shur-Plug


(.093, .156 and .180 Series)



.093 Series



.156 Series



.180 Series

Material (.093 Series)

Insulation -Vinyl, UL 94V-0

Terminal Body -Brass per ASTM B-36

Material (.156 & .180 Series)

Insulation -Vinyl, UL 94V-0

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Series	Dimension L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece	Part Numbers Tape Mounted
22-16 509-3,260 [0.26-1.65]	—	.093	**.812** 20.62	Red	**.140** 3.56	34178	—
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	.156	**.800** 20.32	Blue	**.170** 4.32	324227*†	1-324227-0
		.180	**.753** 19.13	Blue	**.170** 4.32	324228*†	—

† Not UL or CSA Approved or Listed.

*Available in small packaging quantities.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

PLASTI-GRIP Terminals and Splices (Continued)

3-Way Connector



Material

Insulation -Vinyl, UL 94V-0
Terminal Body -Copper per ASTM B-152
Rivet -Brass per QQ-B-626
Plating -Tin per ASTM B-545


Related Product Data

Insulation Color Code -pg. 4
Packaging Quantities -pg. 4
Performance Specifications -pgs. 4 & 5
Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Dimensions W Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Number Loose Piece
16-14 2,050-5,180 [1.04-2.62]	**.033** 0.84	**.877** 22.28	**1.400** 35.56	Blue	**.145** 3.68	34073*

*Available in small packaging quantities.

.250 Tube Cap Assembly



Material

Insulation -Vinyl, UL 94V-0
Terminal Body -Copper per ASTM B-152
Plating -Tin per ASTM B-545
Tube Cap -Copper/Zinc alloy per MIL-C-50
Plating -Tin per ASTM B-545
Rivet -Brass
Plating -Tin per ASTM B-545 over Copper


Related Product Data

Insulation Color Code -pg. 4
Packaging Quantities -pg. 4
Performance Specifications -pgs. 4 & 5
Application Tooling-pg. 66

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Number Loose Piece
22-16 509-3,260 [0.26-1.65]	**.033** 0.84	**.666** 16.92	**.978** 24.84	Black	**.140** 3.56	55137-1†

† Not UL or CSA Approved or Listed.

Wire Pins

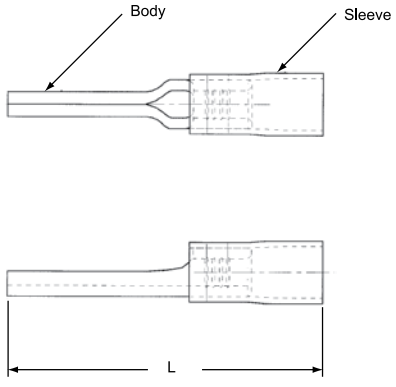

Wire Size Circular Mils [mm²]	Tab	Dimensions Ins.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Number
22-16	**.070** 1.78	**.140** 3.56	**.943** 23.95	Red	**.145** 3.68	696116-1 (Tape)
	.071 1.80	**.135** 3.43	**.905** 22.99	Red	**.145** 3.68	165167 (Loose Piece)

Catalog 82042
Revised 07-08
www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425
South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

TERMINYL Terminals and Splices

Product Facts

- Designed to provide insulated terminals and splices for large wire sizes, many of which are used in airborne and ground support applications
- Tested under the procedures stipulated by MIL Spec. MIL-T-7928, they meet and exceed requirements
- Designed and engineered to withstand extreme vibration, shock and structural stresses, elevated temperatures and other conditions which could adversely affect the circuit requirements in complex air and space flight equipment
- The use of matching AMP tooling provides for precision crimping which makes all terminations identical
- This uniformity promotes maximum reliability and, coupled with tool die marks on the barrel indicating the wire size and color coding of the insulation sleeve, also serves as a built-in quality control factor
- Pre-insulated with color coded nylon which also acts as insulation support
- Wire size range of terminals is 8 AWG through 4/0 AWG

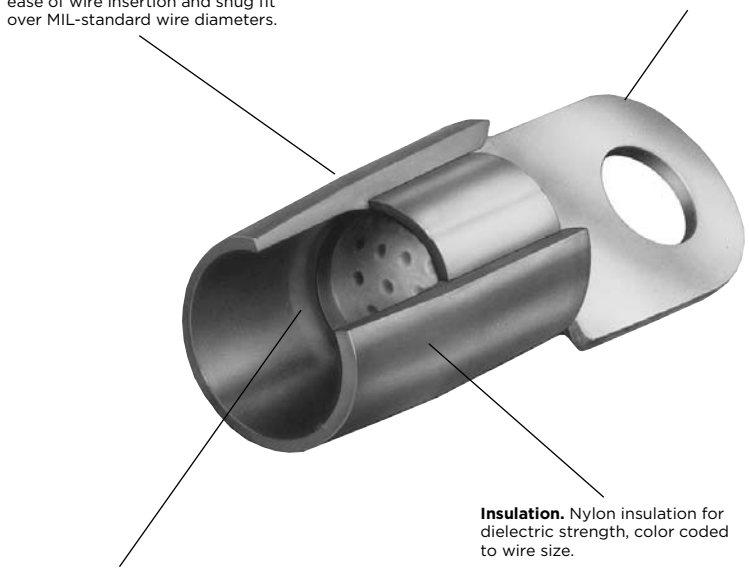

Temperature Rating: 105°C Max.

TERMINYL Terminals meet or exceed the requirements of MIL-T-7928, Type II, Class 2.

Refer to AMP Qualified Products for Military Application, Catalog 73-159 for Military Specification Number to AMP Part Number cross reference.

Catalog 82042
Revised 07-08
www.tycoelectronics.com


Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425
South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

TERMINYL Terminals and Splices (Continued)

Ring Tongue Terminals



Material

Insulation -Nylon, UL 94V-2

Terminal Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling -pg. 67

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece
8 13,100-20,800 [6.64-10.5]	**.043** 1.09	8 M4	**.478** 12.14	**.437** 11.10	**1.183** 30.05	**1.425** 36.20	Red	**.256** 6.50	53041
		10	**.431** 10.95	**.437** 11.10	**1.183** 30.05	**1.402** 35.61	Red	**.256** 6.50	324043
		1/4 M6	**.478** 12.14	**.437** 11.10	**1.183** 30.05	**1.425** 36.20	Red	**.256** 6.50	324082
		5/16 M8	**.587** 14.91	**.500** 12.70	**1.246** 31.65	**1.542** 39.17	Red	**.256** 6.50	324044
		3/8	**.587** 14.91	**.500** 12.70	**1.246** 31.65	**1.542** 39.17	Red	**.256** 6.50	324045
6 20,800-33,100 [10.5-16.8]	**.048** 1.22	10	**.398** 10.11	**.515** 13.08	**1.447** 36.75	**1.700** 43.18	Blue	**.314** 7.98	53119-1[1]
			.468 11.89	**.421** 10.69	**1.338** 33.99	**1.575** 40.01	Blue	**.314** 7.98	324046
		1/4 M6	**.500** 12.70	**.515** 13.08	**1.447** 36.75	**1.700** 43.18	Blue	**.314** 7.98	324047
		5/16 M8	**.625** 15.88	**.515** 13.08	**1.447** 36.75	**1.762** 44.75	Blue	**.314** 7.98	324048
		3/8	**.625** 15.88	**.515** 13.08	**1.447** 36.75	**1.762** 44.75	Blue	**.314** 7.98	324049
4 33,100-52,600 [16.8-26.7]	**.051** 1.30	8 M4	**.437** 11.10	**.265** 6.73	**1.155** 29.34	**1.376** 34.95	Yellow	**.382** 9.70	331456
		10	**.437** 11.10	**.265** 6.73	**1.155** 29.34	**1.376** 34.95	Yellow	**.382** 9.70	1-331456-0
			.546 13.87	**.531** 13.49	**1.536** 39.01	**1.812** 46.02	Yellow	**.382** 9.70	324111
		1/4 M6	**.546** 13.87	**.531** 13.49	**1.536** 39.01	**1.812** 46.02	Yellow	**.382** 9.70	324050
		5/16 M8	**.679** 17.25	**.531** 13.49	**1.536** 39.01	**1.878** 47.70	Yellow	**.382** 9.70	324051
		3/8	**.679** 17.25	**.531** 13.49	**1.536** 39.01	**1.878** 47.70	Yellow	**.382** 9.70	324052*
		1/2 M12	**.679** 17.25	**.531** 13.49	**1.536** 39.01	**1.878** 47.70	Yellow	**.382** 9.70	324114
4HD[3] 33,100-52,600 [16.8-26.7]	**.094** 2.39	1/4 M6	**.500** 12.70	**.390** 9.91	**1.349** 34.26	**1.602** 40.69	Yellow	**.443** 11.25	330966
		5/16 M8	**.679** 17.25	**.456** 11.58	**1.565** 39.75	**1.907** 48.44	Yellow	**.443** 11.25	1-331421-0
		3/8	**.679** 17.25	**.456** 11.58	**1.565** 39.75	**1.907** 48.44	Yellow	**.443** 11.25	1-331421-1
2 52,600-83,700 [26.7-42.4]	**.060** 1.52	10	**.711** 18.06	**.578** 14.68	**1.705** 43.31	**2.063** 52.40	Red	**.468** 11.89	328655
		1/4 M6	**.679** 17.25	**.578** 14.68	**1.705** 43.31	**2.045** 51.94	Red	**.468** 11.89	324053
		5/16 M8	**.711** 18.06	**.578** 14.68	**1.705** 43.31	**2.063** 52.40	Red	**.468** 11.89	324112
		3/8	**.711** 18.06	**.578** 14.68	**1.705** 43.31	**2.063** 52.40	Red	**.468** 11.89	324054
		1/2 M12	**.855** 21.72	**.578** 14.68	**1.705** 43.31	**2.135** 54.23	Red	**.468** 11.89	324055

*Available in small packaging quantities.

[1]Rectangular tongue terminal

[2]90° bend ring tongue terminal

[3]Heavy duty for extra mechanical strength.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

TERMINYL Terminals and Splices (Continued)

Ring Tongue Terminals

(Continued)

Wire Size Circular Mils [mm²]	Tongue Material Thickness Max.	Stud Size	Dimensions W	Dimensions C	Dimensions E Max.	Dimensions L Max.	Terminal Insulation Color	Wire Insulation Diameter Max.	Part Numbers Loose Piece
1/0 83,700-119,500 [42.4-60.6]	**.073** 1.85	1/4 M6	**.675** 17.15	**.625** 15.88	**2.033** 51.64	**2.360** 59.94	Blue	**.580** 14.73	55822-1
			.807 20.50	**.625** 15.88	**2.033** 51.64	**2.426** 61.62	Blue	**.580** 14.73	324056
		5/16 M8	**.807** 20.50	**.625** 15.88	**2.033** 51.64	**2.426** 61.62	Blue	**.580** 14.73	324113
		3/8	**.807** 20.50	**.625** 15.88	**2.033** 51.64	**2.426** 61.62	Blue	**.580** 14.73	324057
		1/2 M12	**.875** 22.23	**.625** 15.88	**2.017** 51.23	**2.454** 62.33	Blue	**.580** 14.73	324058
2/0 119,500-150,500 [60.6-76.3]	**.083** 2.11	5/16 M8	**.926** 23.52	**.625** 15.88	**2.026** 51.46	**2.416** 61.37	Yellow	**.610** 15.49	324083
		3/8	**.926** 23.52	**.625** 15.88	**2.026** 51.46	**2.416** 61.37	Yellow	**.610** 15.49	324084
		1/2 M12	**.926** 23.52	**.625** 15.88	**2.026** 51.46	**2.416** 61.37	Yellow	**.610** 15.49	324085
3/0 150,500-190,000 [76.3-96.3]	**.094** 2.39	3/8	**1.082** 27.48	**.625** 15.88	**2.294** 58.27	**2.794** 70.97	Red	**.680** 17.27	324185
4/0 190,000-231,100 [96.3-117]	**.105** 2.67	3/8	**.835** 21.21	**.625** 15.88	**2.295** 58.29	**2.700** 68.58	Blue	**.765** 19.43	329150
			1.150 29.21	**.625** 15.88	**2.295** 58.29	**2.858** 72.59	Blue	**.765** 19.43	324187
		1/2 M12	**1.150** 29.21	**.625** 15.88	**2.295** 58.29	**2.858** 72.59	Blue	**.765** 19.43	324188

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

TERMINYL Terminals and Splices (Continued)

Butt Splices

Material

Insulation Sleeve -Nylon, UL 94V-2

Splice Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545


Related Product Data

Insulation Color Code -pg. 4


Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5


Application Tooling -pg. 67



Single to single-
Standard splice or
step down assembly



Single to multiple
Standard splice



Multiple to Multiple
Standard splice

Wire Size Circular Mils [mm²]	Style	Dimension L Max.	Splice Insulation Color	Wire Insulation Diameter Max.		Part Numbers
				Single End	Multiple End	
8 to 12-10 13,100-20,800 [6.64-10.5] to 5,180-13,100 [2.62-6.64]	Single to Single Step-Down Assembly	**2.066** 52.48	Red w/ Yellow at adapter end	**.255** 6.48	—	328569
6 to 8 20,800-33,100 [10.5-16.8] to 13,100-20,800 [6.64-10.5]	Single to Single Step-Down Assembly	**2.265** 57.53	Blue w/ Red at adapter end	**.310** 7.87	—	328571
8 13,100-20,800 [6.64-10.5]	Single to Single Standard Splice	**2.066** 52.48	Red	**.255** 6.48	—	324625
6 20,800-33,100 [10.5-16.8]		**2.265** 57.53	Blue	**.310** 7.87	—	324660
4 33,100-52,600 [16.8-26.7]		**2.804** 71.22	Yellow	**.370** 9.40	—	324622
2 52,600-83,700 [26.7-42.4]		**3.094** 78.59	Red	**.445** 11.30	—	324623
8 13,100-20,800 [6.64-10.5]	Single to Multiple Standard Splice	**2.171** 55.14	Red	**.255** 6.48	**.335** 8.51	324658
6 20,800-33,100 [10.5-16.8]		**2.359** 59.92	Blue	**.310** 7.87	**.415** 10.54	324621
4 33,100-52,600 [16.8-26.7]		**2.804** 71.22	Yellow	**.370** 9.40	**.495** 12.57	324662
8 13,100-20,800 [6.64-10.5]	Multiple to Multiple Standard Splice	**2.276** 57.81	Red	—	**.335** 8.51	324657
6 20,800-33,100 [10.5-16.8]		**2.484** 63.09	Blue	—	**.415** 10.54	324659
2 52,600-83,700 [26.7-42.4]		**3.094** 78.59	Red	—	**.595** 15.11	324663

[1]Step-Down Assembly includes adapter which is visible through insulation sleeve window.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.


USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

CERTI-SEAL Terminals and Splices

Product Facts

- Nylon window splice for military, commercial, aircraft, and missile applications that seals out vapors and fluids and imparts exceptional wire insulation support
- Metal rings at both ends of splice and permanently crimped to wire insulation for a moisture tight seal, even at altitude
- Designed to fit more than 100 insulation diameters in MIL-Spec wires from #24 to #10 AWG, and is available in three types
- First type is made with a nylon ring adapter within the wire entrance
- Second type, without nylon ring adapters
- Third type with a nylon ring adapter in one end only
- Special notch feature on the outside of the splice allows locator in the crimping tool to precisely position splice before crimping and to prevent twisting or horizontal movement during crimping
- Window area of each splice permits visual inspection of the linear plane of the crimp in relation to the inner metal sleeve
- Wire-stops in splice barrel indicate exact insertion depth of stripped wire-ends

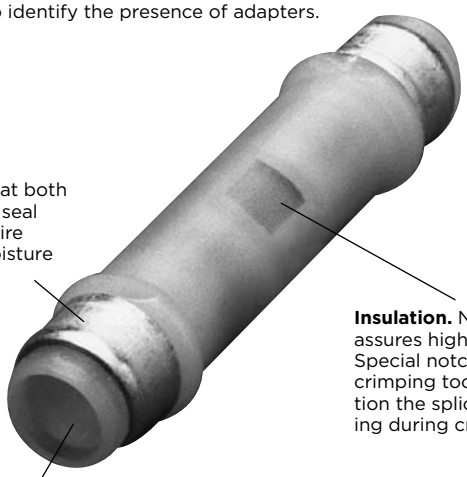

Color Coding. The splice body is color coded by wire size: Tin plated for 24-20, Red for 22-18, Blue for 16-14, Yellow for 12-10. The metal rings are color coded green or orange to identify the presence of adapters.

Basic Splice Material. The basic splice body is constructed of fine grade high conductivity copper per ASTM B-152 and is either color coded or tin-plated per ASTM B-545. Tyco Electronics special plating process creates durable corrosion resistance to salt spray and most chemical fumes.

Rings. Metal rings at both ends permanently seal the splice to the wire insulation for a moisture tight seal.

Insulation. Nylon insulation assures high dielectric strength. Special notch feature allows crimping tool locator to position the splice to prevent twisting during crimping.

Adapters. Nylon ring adapter allows for smaller wire insulation diameters.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

CERTI-SEAL Terminals and Splices (Continued)

Splice



Material

Insulation -Nylon, UL 94V-2

Splice Body -Copper per ASTM B-152

Plating -Tin per ASTM B-545 or Zinc Plate/Dye Chromate

Related Product Data

Insulation Color Code -pg. 4

Packaging Quantities -pg. 4

Performance Specifications -pgs. 4 & 5

Application Tooling -shown below

Splices with nylon wire insulation diameter adapters

Wire Size Circular Mils [mm²]	L Max.	Body Color	Ring Color	Wire Insulation Dia. Max.	Part Numbers	Hand Tool Part No.
24-20 320-1,290 [0.16-0.65]	**.970** 24.64	Tin Plated	Green	**.065** 1.65	324987	46073
24-20 320-1,290 [0.16-0.65]	**.970** 24.64	Tin Plated	Orange	**.073** 1.85	1-324987-0	46073
22-18 509-1,900 [0.26-0.96]	**1.156** 29.36	Red	Green	**.101** 2.57	324988	46074
16-14 2,050-5,180 [1.04-2.62]	**1.156** 29.36	Blue	Green	**.120** 3.05	324989	59282
12-10 5,180-13,100 [2.62-6.64]	**1.345** 34.16	Yellow	Green	**.150** 3.81	324990	58325-1

Splices without nylon wire insulation diameter adapters

Wire Size Circular Mils [mm²]	L Max.	Body Color	Ring Color	Wire Insulation Dia. Max.	Part Numbers	Hand Tool Part No.
24-20 320-1,290 [0.16-0.65]	**.970** 24.64	Tin Plated	Tin Plated	**.100** 2.54	324544	46073
22-18 509-1900 [0.26-0.96]	**1.156** 29.36	Red	Tin Plated	**.133** 3.38	324548	46074
16-14 2,050-5,180 [1.04-2.62]	**1.156** 29.36	Blue	Tin Plated	**.157** 3.99	324549	59282
12-10 5,180-13,100 [2.62-6.64]	**1.345** 34.16	Yellow	Tin Plated	**.218** 5.54	324631	58325-1
16-14 HD	**1.345** 34.16	Tin Plated	Tin Plated	**.218** 5.54	55685-1	58325-1

Splices with nylon wire insulation diameter adapter in one end

Wire Size Circular Mils [mm²]	L Max.	Body Color	Ring Color	Wire Insulation Dia. Max.		Part Number	Hand Tool Part No.
				Adapter End	Other End		
24-20 320-1,290 [0.16-0.65]	**.970** 24.64	Tin Plated	Orange & Tin Plated	**.073** 1.85	**.100** 2.54	1-324987-1	46073

Tooling



Tool Part No. 46073 or 46074



Tool Part No. 59282 or 58325-1

Hand tooling features the AMP CERTI-CRIMP ratchet so that the operator fully closes tool so that crimping dies in tool head fully "bottom". Locator feature in head assures that splice is properly oriented in tool.

CERTI-SEAL Tools do not require wire insulation adjustment prior to crimping.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Class 1 and Class 2 Military Approvals

Approval	Dimensional Requirement	Application Tooling	Use	Performance Requirement
Class 1	Terminals must comply with the dimensional requirements specified by the military.	Hand application tool which must conform to the military's dimensional and performance specification.	For procurement by government agencies for maintenance and repair.	Per Military Specification Mil-T-7928G
Class 2	Terminals must comply with the dimensional requirements specified by the manufacturer's customer drawing. For field repair purposes Class 2 terminals must be capable of being replaced by Class 1 Terminals.	The terminal manufacturers recommended application tooling. **Note:** Several tape mounted part numbers are currently Class 2 approved.	For procurement by contractors and manufacturers for high volume production, modification, and repair.	

Military Specifications MS 25036

AWG	MS25036 Dash Numbers	PIDG Part Numbers		Class	Stud Size
		Loose Piece	Tape Mounted		
22-18	101	36149	—	1 & 2	6
		—	2-36149-2	2	6
		36150	—	1 & 2	6
		—	2-36150-1	2	6
	102	51863	—	1 & 2	6
		—	51863-1	2	6
	103	36153	—	1 & 2	10
		—	2-36153-2	2	10
		36154	—	1 & 2	10
		—	2-36154-2	2	10
	104	31895	—	1 & 2	5/16
		—	2-31895-1	2	5/16
		320572	—	1 & 2	5/16
		—	2-320572-1	2	5/16
	105	31897	—	1 & 2	3/8
		—	2-31897-2	2	3/8
		320573	—	1 & 2	3/8
		—	2-320573-4	2	3/8
16-14	106	320561	—	1 & 2	6
		—	2-320561-2	2	6
	107	51864	—	1 & 2	6
		—	51864-3	2	6
	108	51864-2	—	1 & 2	10
		—	51864-4	2	10
	109	320575	—	1 & 2	5/16
		—	2-320575-1	2	5/16
	110	320564	—	1 & 2	3/8
		—	2-320564-3	2	3/8
12-10	111	35107	—	1 & 2	6
		—	2-35107-1	2	6
		320567	—	1 & 2	6
		—	2-320567-2	2	6
	112	35109	—	1 & 2	10
		—	2-35109-1	2	10
		36161	—	1 & 2	10
		—	2-36161-2	2	10
	113	35111	—	1 & 2	5/16
		—	2-35111-1	2	5/16
		320576	—	1 & 2	5/16
		—	2-320576-1	2	5/16
	114	35112	—	1 & 2	3/8
		320577	—	1 & 2	3/8
		—	2-320577-3	2	3/8

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Class 1 and Class 2 Military Approvals (Continued)

Military Specifications
MS 25036

(Continued)

AWG	MS25036 Dash Numbers	TERMINYL Part Numbers		Class	Stud Size
		Loose Piece	Tape Mounted		
8	115	324043	—	2	10
	116	324082	—	2	1/4
	117	324044	—	2	5/16
	118	324045	—	2	3/8
6	119	324046	—	2	10
	120	324047	—	2	1/4
	121	324048	—	2	5/16
	122	324049	—	2	3/8
4	123	324050	—	2	1/4
	124	324051	—	2	5/16
	125	324052	—	2	3/8
2	126	324053	—	2	1/4
	127	324054	—	2	3/8
	128	324055	—	2	1/2
1[1]	129	324056	—	2	1/4
	130	324057	—	2	3/8
	131	324058	—	2	1/2
1/0	132	324056	—	2	1/4
	133	324057	—	2	3/8
	134	324058	—	2	1/2
2/0	135	324083	—	2	5/16
	136	324084	—	2	3/8
	137	324085	—	2	1/2
3/0	138	324185	—	2	3/8
4/0	140	324187	—	2	3/8
	141	324188	—	2	1/2

[1]Tyco Electronics recommends #1/0 AWG terminals for #1 AWG application.

Class 1 and Class 2 Military Approvals (Continued)

Military Specifications
MS 25036

(Continued)

AWG	MS25036 Dash Numbers	PIDG Part Numbers		Class	Stud Size
		Loose Piece	Tape Mounted		
26-24	143	54310-1	—	1 & 2	2
		323913	—	2	2
	144	52189	—	1 & 2	4
		323914	2-323914-1	2	4
	145	53073	—	1 & 2	6
		326875	2-326875-1	2	6
	146	54311-1	—	1 & 2	8
		323916	2-323916-1	2	8
	147	54312-1	—	1 & 2	10
		—	54312-2	2	10
		324075	2-324075-1	2	10
22-18	148	31880	—	1 & 2	4
		—	2-31880-1	2	4
		320553	—	1 & 2	4
		—	2-320553-2	2	4
	149	31890	—	1 & 2	8
		—	2-31890-1	2	8
		320551	—	1 & 2	8
		—	1-320551-1	2	8
	150	31894	—	1 & 2	1/4
		—	2-31894-2	2	1/4
		320571	—	1 & 2	1/4
		—	2-320571-2	2	1/4
	151	328975	—	1 & 2	1/2
16-14	152	324159	—	1 & 2	4
	153	51864-1	—	1 & 2	8
		—	51864-5	2	8
	154	320563	—	1 & 2	1/4
		—	2-320563-2	2	1/4
	155	328976	—	1 & 2	1/2
12-10	156	35108	—	1 & 2	8
		—	2-35108-1	2	8
		320568	—	1 & 2	8
		—	2-320568-1	2	8
	157	35110	—	1 & 2	1/4
		—	2-35110-1	2	1/4
		320569	—	1 & 2	1/4
		—	2-320569-3	2	1/4
	158	52077	—	2	1/2

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Class 1 and Class 2 Military Approvals (Continued)

Military Specifications
M7928/1

AWG	M7928/1 Dash Numbers	PIDG-Insulation Restricting Part Numbers		Class	Stud Size
		Loose Piece	Tape Mounted		
26	1	53078	—	1 & 2	2
	2	53049	—	1 & 2	4
	3	53050	—	1 & 2	6
	4	53051	—	1 & 2	8
	5	53052	—	1 & 2	10
24	6	53053	—	1 & 2	2
	7	53054	—	1 & 2	4
	8	53055	—	1 & 2	6
	9	53056	—	1 & 2	8
	10	53057	—	1 & 2	10
22	11	52273	—	1 & 2	4
	12	2-36149-3	—	1 & 2	6
	13	51863-2	—	1 & 2	6
		—	51863-5	2	6
	14	1-320551-2	—	1 & 2	8
		—	1-320551-5	2	8
	15	2-36153-3	—	1 & 2	10
		—	2-36153-6	2	10
	16	2-320571-3	—	1 & 2	1/4
	17	2-320572-2	—	1 & 2	5/16
	18	2-320573-1	—	1 & 2	3/8
	19	2-328975-1	—	1 & 2	1/2
20	20	52273-1	—	1 & 2	4
	21	2-36149-4	—	1 & 2	6
	22	51863-3	—	1 & 2	6
		—	51863-6	2	6
	23	1-320551-3	—	1 & 2	8
	24	2-36153-4	—	1 & 2	10
		—	2-36153-8	2	10
	25	2-320571-4	—	1 & 2	1/4
	26	2-320572-3	—	1 & 2	5/16
	27	2-320573-2	—	1 & 2	3/8
	28	2-328975-2	—	1 & 2	1/2
18	29	52273-2	—	1 & 2	4
	30	2-36149-5	—	1 & 2	6
	31	51863-4	—	1 & 2	6
		—	51863-7	2	6
	32	1-320551-4	—	1 & 2	8
		—	1-320551-8	2	8
	33	2-36153-5	—	1 & 2	10
		—	2-36153-9	2	10
	34	2-320571-5	—	1 & 2	1/4
	35	2-320572-4	—	1 & 2	5/16
	36	2-320573-3	—	1 & 2	3/8
	37	2-328975-3	—	1 & 2	1/2
16	38	52274	—	1 & 2	4
	39	2-320561-3	—	1 & 2	6
	40	51864-6	—	1 & 2	6
		—	1-51864-2	2	6
	41	1-51864-0	—	1 & 2	8
	42	51864-7	—	1 & 2	10
		—	1-51864-3	2	10
	43	2-320563-3	—	1 & 2	1/4
	44	2-320575-2	—	1 & 2	5/16
	45	2-320564-1	—	1 & 2	3/8
	46	2-328976-1	—	1 & 2	1/2

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Class 1 and Class 2 Military Approvals (Continued)

Military Specifications M7928/1

(Continued)

AWG	M7928/1 Dash Numbers	PIDG-Insulation Restricting Part Numbers		Class	Stud Size
		Loose Piece	Tape Mounted		
14	47	52274-1	—	1 & 2	4
	48	2-320561-4	—	1 & 2	6
	49	51864-8	—	1 & 2	6
	50	1-51864-1	—	1 & 2	8
		—	1-51864-7	2	8
	51	51864-9	—	1 & 2	10
		—	1-51864-5	2	10
	52	2-320563-4	—	1 & 2	1/4
	53	2-320575-3	—	1 & 2	5/16
	54	2-320564-2	—	1 & 2	3/8
	55	2-328976-2	—	1 & 2	1/2
12	56	2-36161-5	—	1 & 2	6
	57	2-320568-2	—	1 & 2	8
	58	2-36161-3	—	1 & 2	10
	59	2-320569-5	—	1 & 2	1/4
	60	2-320576-2	—	1 & 2	5/16
	61	2-320577-1	—	1 & 2	3/8
	62	52077-1	—	2	1/2
10	63	2-36161-6	—	1 & 2	6
	64	2-320568-3	—	1 & 2	8
	65	2-36161-4	—	1 & 2	10
		—	2-36161-8	2	10
	66	2-320569-6	—	1 & 2	1/4
		—	2-320569-8	2	1/4
	67	2-320576-3	—	1 & 2	5/16
	68	2-320577-2	—	1 & 2	3/8
	69	52077-2	—	2	1/2

Military Specifications M7928/4

AWG	M7928/4 Dash Numbers	PIDG PVF_2 Part Numbers		Class	Stud Size
		Loose Piece	Tape Mounted		
22-18	101	53406-1	—	1 & 2	6
	102	53407-1	—	1 & 2	6
		—	53407-2	2	6
	103	53409-1	—	1 & 2	10
	104	53411-1	—	1 & 2	5/16
	105	53412-1	—	1 & 2	3/8
16-14	106	53415-1	—	1 & 2	6
	107	53416-1	—	1 & 2	6
		—	53416-2	2	6
	108	53418-1	—	1 & 2	10
		—	53418-2	2	10
	109	53420-1	—	1 & 2	5/16
	110	53421-1	—	1 & 2	3/8
12-10	111	53423-1	—	1 & 2	6
	112	53425-1	—	1 & 2	10
		—	53425-2	2	10
	113	53427-1	—	1 & 2	5/16
	114	53428-1	—	1 & 2	3/8
26-24	143	53400-1	—	1 & 2	2
	144	53401-1	—	1 & 2	4
	145	53402-1	—	1 & 2	6
	146	53403-1	—	1 & 2	8
	147	53404-1	—	1 & 2	10

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Class 1 and Class 2 Military Approvals (Continued)

Military Specifications M7928/4

(Continued)

AWG	M7928/4 Dash Numbers	PIDG PVF_2 Part Numbers		Class	Stud Size
		Loose Piece	Tape Mounted		
22-18	148	53405-1	—	1 & 2	4
	149	53408-1	—	1 & 2	8
		—	53408-2	2	8
	150	53410-1	—	1 & 2	1/4
		—	53410-2	2	1/4
	151	53413-1	—	1 & 2	1/2
16-14	152	53414-1	—	1 & 2	4
	153	53417-1	—	1 & 2	8
	154	53419-1	—	1 & 2	1/4
	155	53422-1	—	1 & 2	1/2
12-10	156	53424-1	—	1 & 2	8
		—	53424-2	2	8
	157	53426-1	—	1 & 2	1/4
	158	53429-1	—	2	1/2

Military Specifications M7928/5

AWG	M7928/5 Dash Numbers	PIDG Window Splice Part Numbers		Class
		Loose Piece	Tape Mounted	
26-24	1	323994	—	1 & 2
24-20	2	323975	—	1 & 2
		—	2-323975-3	2
22-18	3	320559	—	1 & 2
		—	2-320559-4	2
16-14	4	320562	—	1 & 2
		—	2-320562-3	2
12-10	5	320570	—	1 & 2

Military Specifications M7928/6

AWG	M7928/6 Dash Numbers	PIDG Window Splice PVF_2 Part Numbers		Class
		Loose Piece	Tape Mounted	
26-24	1	53546-1	—	1 & 2
24-20	2	53547-1	—	1 & 2
		—	53547-2	2
22-16	3	53548-1	—	1 & 2
		—	53548-2	2
16-14	4	53549-1	—	1 & 2

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Class 1 and Class 2 Military Approvals (Continued)

Military Specifications
MS 17143

AWG	MS17143 Dash Numbers	PIDG Part Numbers		Class	Stud Size
		Loose Piece	Tape Mounted		
22-18	1	327932	—	1 & 2	8
16-14	2	2-327934-2	—	1 & 2	8
12-10	3	327936	—	1 & 2	8
22-18	4	2-327938-1	—	1 & 2	6
		—	2-327938-2	2	6
16-14	5	2-327940-4	—	1 & 2	6
12-10	6	327942	—	1 & 2	6
22-18	7	327944	—	1 & 2	8
		—	2-327944-2	2	8
16-14	8	2-327946-4	—	1 & 2	8
12-10	9	327948	—	1 & 2	8
22-18	10	2-327950-1	—	1 & 2	5
16-14	11	2-327952-2	—	1 & 2	5
		—	2-327952-6	2	5
12-10	12	327954	—	1 & 2	5
		—	2-327954-2	2	5
22-18	13	2-327956-1	—	1 & 2	6
16-14	14	2-327958-4	—	1 & 2	6
12-10	15	2-327960-1	—	1 & 2	6
		—	2-327960-2	2	6
22-18	16	327962	—	1 & 2	4
16-14	17	2-327964-4	—	1 & 2	4
12-10	18	327966	—	1 & 2	4
22-18	19	2-327968-1	—	1 & 2	4
16-14	20	2-327970-4	—	1 & 2	4
12-10	21	327972	—	1 & 2	4

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Tooling

Insulated Terminals and Splices — 30 to 10 AWG Wire Range

Description	AMP Wire Range	Tools for Loose Piece Termination					Tools for Tape Mounted Terminations				
		Hand Tools		Pneumatic Tools							
		Single Wire Range	Multi-Wire Range	Heads for 6-26 Single Wire Range	Heads for 6-26 Multi-Wire Range	Dies for 69365, 69365-2, 69710-1[3], 217200-1[4]	Tape Dies for 69875 AMP-TAPETRONIC No Applicator Required	Tape Dies for 354500-1 AMP-O-LECTRIC Model "G" Applicator 567200-3	Tape Dies for 818380-1 AUTO-PRO Applicator 818057-2	Tape Dies for AMPOMATOR CLS III G, CLS IV Applicator 687658-1	Tape Dies for 565435-5 AMP-O-LECTRIC Model "K" Applicator 567200-2
PIDG Terminals & Splices and PLASTI-GRIP Terminals	30-26	69163–uses 26-22 Terms.	–	–	–	–	–	–	–	–	–
	26-22	46121†	59275†	314537-1	–	69344	69877	69877	69877	69877	69877
	22-16	47386†	59250† 59824-1 58433-3[2]	314270-3	679305-1	47806-2	69872* 59826-1[1]	69872* 59826-1[1]	69872* 59826-1[1]	69872* 59826-1[1]	69872* 59826-1[1]
	16-14	68343-1 (.250 exp.) 47387	59250† 59824-1[1] 58433-3[2]	314269-1	679305-1	47807-1	69873* 59827-1[1]	69873* 59827-1[1]	69873* 59827-1[1]	69873* 59827-1[1]	69873* 59827-1[1]
	12-10 16-14 HD	59239-4† 59287-2 (.300 exp.)	59824-1[1] 58433-3[2]	679300-1	679305-1	47808-6 Std. 47808-5 (.300 exp.)	69874* 69897 (.300 exp.) 59828-1[1]	69874* 69897 (.300 exp.) 59828-1[1]	69874* 69897 (.300 exp.) 59828-1[1]	69874* 69897 (.300 exp.) 59828-1[1]	69874* 69897 (.300 exp.) 59828-1[1]
PLASTI-GRIP Splices	26-22	46121 (butt spl. only)	–	–	–	–	–	–	–	–	–
	22-16	45160 (butt spl. only) 45449 (parallel spl. only)	58433-3[2] (butt spl. only)	314868-1 (butt spl. only)	–	–	69872 (butt spl. only)	69872 (butt spl. only)	69872 (butt spl. only)	69872 (butt spl. only)	69872 (butt spl. only)
	16-14	45575-1 (butt spl. only) 45450 (parallel spl. only)	58433-3[2] (butt spl. only)	314869-1 (butt spl. only)	–	–	69873 (butt spl. only)	69873 (butt spl. only)	69873 (butt spl. only)	69873 (butt spl. only)	69873 (butt spl. only
	12-10 16-14 HD	59489 (butt spl. only) 59287-1 (.300 exp. butt spl. only) 59270 (parallel spl. only)	58433-3[2] (butt spl. only)	–	–	–	69874 (butt spl. only)	69874 (butt spl. only)	69874 (butt spl. only)	69874 (butt spl. only)	69874 (butt spl. only)

†Tooling with adjustable insulation crimp.

*Same die set/configuration as in hand tools.

[1]TETRA-CRIMP die configuration.

[2]PRO-CRIMPER II commercial tool not approved for UL applications.

[3]69710-1 hand tool.

[4]6-26 Pneumatic Tool Adapter

Tooling (Continued)

Insulated Terminals and Splices—8 to 4/0 AWG Wire Range

Description	Wire Size	Tools for Loose Piece Terminations				Tools for Tape Mounted Terminations	
		Hand Tools	Dies for Crimp Head 69051[1] & Hydraulic Hand Tool 59974-1	Dies for Crimp Head 69066[1] & 58422-1[1]	Head for Pneumatic Hand Tool 69015	Dies for AMP-TAPETRONIC Machine 68250-1	Dies for AMP-TAPETRONIC Machine with Insulation Adjustment 68250-2
PLASTI-GRIP Terminals and Splices	8	69959	48752-1 47820[2]	—	—	68247-1[2]	1214512-1[3] 1214512-2[4]
	6	—	48753-1 47821[2]	—	68325-1	68248-1[2]	1213500-1[3] 1213500-2[4]
	4	—	48754-1 47822[2]	—	—	68249-1[2]	1213098-1[3] 1213098-2[4]
	2	—	48755-1 47823[2]	—	—	—	—
	1/0	—	—	48756-1	—	—	—
	2/0	—	—	48757-1	—	—	—
TERMINYL Terminals and Splices	8	—	47820	—	68285-1	—	—
	6	—	47821	—	—	—	—
	4	—	47822	—	—	—	—
	2	—	47823	—	—	—	—
	1/0	—	—	47824	—	—	—
	2/0	—	—	47825	—	—	—
	3/0	—	—	47915	—	—	—
	4/0	—	—	47918	—	—	—
	4 HD	—	—	69463	—	—	—

[1]Heads for Power Units 69120-1, 69120-2, or 314979-1.

[2]No insulation crimp.

[3]Without insulation crimp.

[4]With insulation crimp.

Insulated FASTON Terminals and Splices—26 to 10 AWG Wire Range

Wire Size	Hand Tool	Tools for Tape Mounted Terminations			Tools for Strip Form Terminations
		Tape Dies for 69875 AMP-TAPETRONIC No Applicator Required	Tape Dies for AMP-O-LECTRIC[1] Model "G" Applicator 567200-3	Tape Dies for AMPOMATOR CLS III G, CLS IV Applicator 687658-1	AMPOMATOR CLS III G, CLS IV Applicators
26-24	48518-2	69877-2	69877-2	69877-2	—
22-18	59824-1	59826-1	59826-1*	59826-1	466788-3[2]
22-18 (Natural)	90185-1	90248-2	90248-2	90248-2	466554-3
16-14	59824-1	59827-1	59827-1*	59827-1	466789-3[2]
14-12	90246-1	90240-2	90240-2	90240-2	—
12-10	59824-1	59828-1	59828-1*	59828-1	466790-4[2]

*Only UL and CSA approved.

[1]AMP-O-LECTRIC Model "K" 565435-5 uses applicator 567200-2.

[2]Die included with applicator.

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Tooling (Continued)

Loose Form Terminal and Splice Tooling

CERTI-CRIMP Hand Tools



Double Action Hand Tool



Heavy Head Hand Tool



"C" Head Straight Action Hand Tool Part No. 69710-1



PRO-CRIMPER II Hand Tool Part No. 58433-3



T-HEAD Tool Part No. 59250, 59275

TETRA-CRIMP Hand Tool



Part No. 59824-1

Hydraulic Hand Tools



Part No. 59974-1 (Dies Required)

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Tooling (Continued)

Pneumatic Tools



Part No. 69015



Part No. 69365 (Hand Actuation)
Part No. 69365-2 (Foot Actuation)

Crimping Heads



Part No.
58422-1

(408-9535)



Part No.
69066

(408-2453)



Part No.
69051

6-26 Tool



Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.


Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Tooling (Continued)


Tape Mounted

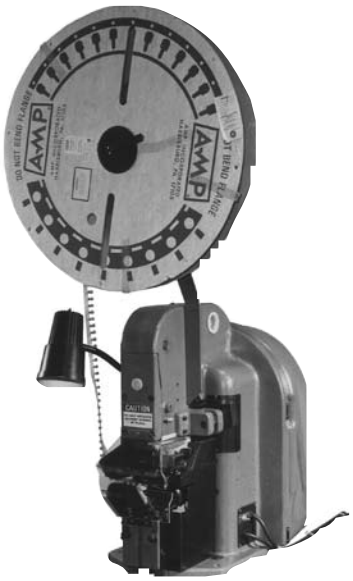

**AMP-TAPETRONIC Machine
69875, 68250-1
(Requires Dies)**



**AMP-O-LECTRIC, Model "G" Machine
(Requires Applicator and Dies)**

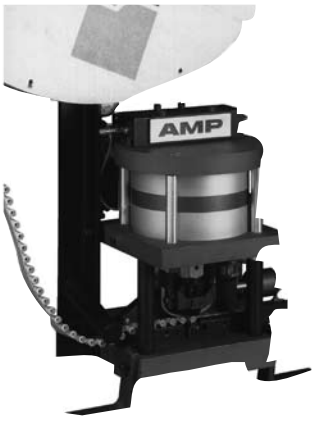

**AUTO-PRO Machine 818380-1
(Requires Applicator and Dies)**



**AMPOMATOR CLS IV Machine
217500-1
(Requires Applicator and Dies)**

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Part Number Index

Note: This index lists all cataloged parts by base no. only. Complete part nos. (with prefixes and/or suffixes) are shown on the page(s) indicated.

Part No.	Page
31880	9
31884	14
31885	14
31886	9
31887	9
31888	14
31890	9
31891	14
31894	10
31895	10
31897	10
31903	14
32050	21
32051	21
32053	21
32054	21
32056	22
32057	22
32058	22
32059	22
32060	22
32403	21
32404	21
32446	32
32448	32
32456	26
32497	23
32498	23
32510	23
32561	23
32562	23
32588	22
32589	22
32835	9
32836	9
32837	9
32883	12
32944	38
32945	38
32947	38
32948	38
32949	38
32950	38
32951	38
32952	38
32953	38
32957	39
32958	39
32959	39
32960	39
32961	39
32981	44
33155	23
33156	23
33168	20
33172	20
33173	20
33476	19
33643	14
33724	11
33734	11
34067	50
34068	50
34069	50
34070	50
34071	50
34072	50
34073	52
34080	21
34090	48
34131	51
34132	51
34133	51
34134	51
34135	51
34136	51
34140	38
34141	38
34142	38
34143	38
34144	38
34145	38
34146	38
34147	38
34148	38
34149	38
34150	38
34151	39
34152	39
34155	44
34156	44
34157	39
34158	39
34159	39
34160	39
34161	39
34162	39
34163	39
34164	39
34165	44
34166	44
34167	44
34168	40
34169	40
34170	40
34171	40
34172	40
34173	40
34176	44
34178	51
34203	50
34204	50
34205	50
34207	51
34243	50
34294	30
34313	26
34406	26
34512	20
34541	21
34805	11
34806	11
34810	11
34821	39
34822	39
34823	39
34824	40
34825	40
34826	40
34827	40
34835	40
34837	40
34852	40
34853	40
34854	40
34855	40
34856	40
34898	43
34945	50
34954	39
34959	39
34974	11
35106	11
35107	12
35108	12
35109	12
35110	12
35111	13
35112	13
35148	12
35149	12
35150	13
35151	13
35152	22
35216	26
35229	9
35244	50
35273	12
35274	11
35279	20
35316	12
35345	14
35346	14
35349	40
35362	14
35363	14
35364	14
35440	26
35449	38
35451	38
35478	14
35481	26
35492	40
35538	14
35559	22
35604	14
35605	14
35634	11
35762	32
35787	12
36149	9, 15, 16
36150	9
36151	9
36152	9
36153	9, 15, 16
36154	9
36157	10
36158	10
36160	11
36161	12, 17
36203	12
36254	9
36485	14
36954	26
42844	34
50534	8
50881	10
51861	14
51863	9, 15, 16
51864	10, 11, 16, 17
51874	23
52041	41
52042	41
52043	42
52044	42
52045	42
52046	42
52077	13, 17
52124	8
52189	8
52262	41
52263	41
52264	41
52265	41
52266	42
52267	42
52273	15, 16
52274	16, 17
52283	28
52284	28
52289	42
52291	41
52307	15, 16
52350	41
52369	23
52403	25
52408	25
52409	25
52410	25
52411	25
52420	25
52421	25
52422	25
52423	25
52430	25
52431	25
52432	25
52433	25
52453	47
52454	47
52455	47
52463	47
52464	47
52465	47
52474	47
52475	47
52856	45
52921	24
52922	24
52923	24
52924	24
52925	24
52927	24
52928	24
52929	24

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Part Number Index (Continued)

Part No.	Page
52930	24
52931	24
52933	24
52934	24
52935	24
52936	24
52937	24
52939	24
52940	24
52941	24
52942	24
52943	24
52945	24
52947	46
52948	46
52949	46
52950	46
52951	46
52955	46
52956	46
52957	46
52961	47
52962	47
52963	47
53041	54
53049	15
53050	15
53051	15
53052	15
53053	15
53054	15
53055	15
53056	15
53057	15
53073	8
53078	15
53115	21
53119	54
53222	29
53240	46
53241	46
53242	46
53244	46
53245	46
53246	47
53247	47
53248	47
53546	31
53547	31
53548	31
53549	31
53550	31
53829	46
53874	45
53912	21
53914	21
53941	10
53942	11
54310	8
54311	8
54312	8
54351	41
54367	44
54725	43
54753	43
54754	43
54771	27
54773	27
54774	49
54775	49
55137	52
55148	18
55157	14
55319	35
55621	41
55629	50
55654	43
55675	34
55678	40
55679	41
55680	42
55685	58
55694	19
55768	24
55777	19
55785	50
55792	50
55793	50
55822	55
55936	10
60544	34
60893	35
60894	35
61048	35
61059	35
61060	35
61198	34
61678	35
150247	10
165167	52
165429	29
184234	35
184235	35
184261	34
184262	34
184264	34
184265	34
184267	35
184268	35
320209	19
320263	48
320306	26
320381	26
320551	9, 15, 16
320552	9
320553	9
320554	9
320555	32
320559	31
320560	10
320561	10, 16, 17
320562	31
320563	11, 16, 17
320564	11, 16, 17
320565	10
320566	32
320567	12
320568	12, 17
320569	12, 17
320570	31
320571	10, 15, 16
320572	10, 15, 16
320573	10, 15, 16
320574	11
320575	11, 16, 17
320576	13, 17
320577	13, 17
320619	10
320620	32
320627	11
320629	19
320630	11
320631	11
320634	12
320665	44
320773	9
320861	23
320862	23
320863	23
320882	9
321013	8
321026	50
321035	21
321045	11
321206	19
321233	22
321235	36
321283	20
321286	50
321518	39
321522	10
321611	26
321617	8
321620	8
321688	36
321808	26
322001	21
322238	14
322249	45
322307	49
322310	49
322312	49
322313	49
322315	49
322316	49
322395	49
322426	23
322724	12
322777	23
322834	49
322985	22
322994	44
323008	9
323011	26
323039	27
323676	10
323682	11
323758	9
323762	12
323763	14
323784	13
323817	27
323818	27
323912	8
323913	8
323914	8, 15
323915	8
323916	8, 15
323975	31
323985	8
323986	8
323989	8
323990	8
323994	31
324011	27
324015	23
324043	54, 60
324044	54, 60
324045	54, 60
324046	54, 60
324047	54, 60
324048	54, 60
324049	54, 60
324050	54, 60
324051	54, 60
324052	54, 60
324053	54, 60
324054	54, 60
324055	54, 60
324056	55, 60
324057	55, 60
324058	55, 60
324075	8
324082	54
324083	55, 60
324084	55, 60
324085	55, 60
324086	11
324111	54
324112	54
324113	61
324114	54
324123	10
324138	50
324158	9
324159	10
324165	45
324169	45
324170	45
324172	45
324184	48
324185	55, 60
324187	55, 60
324188	55, 60
324225	29
324227	51
324228	51
324533	11
324543	30
324544	58
324548	58
324549	58
324557	23
324560	45
324567	23
324577	23
324581	45
324587	23
324597	23
324603	20

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Part Number Index (Continued)

Part No.	Page
324608	23
324615	13
324621	56
324622	56
324623	56
324625	56
324631	58
324657	56
324658	56
324659	56
324660	56
324662	56
324663	56
324915	12
324918	12
324987	58
324988	58
324989	58
324990	58
324993	10
325034	11
325148	19
325150	23
325197	22
325199	22
326741	44
326742	50
326819	38
326859	22
326861	21
326865	23
326875	8, 15
326876	21
326878	9
326882	10
326886	12
327043	44
327174	9
327583	31
327635	32
327636	32
327637	32
327638	31
327639	31
327654	9
327717	21
327735	44
327743	11
327748	30
327932	19
327934	20
327936	20
327938	19
327940	20
327942	20
327944	19
327946	20
327948	20
327950	19
327952	19
327954	20
327956	19
327958	20
327960	20
327962	19
327964	19
327966	20
327968	19
327970	19
327972	20
328261	40
328281	22
328394	21
328427	50
328489	8
328516	45
328527	39
328569	56
328571	56
328655	54
328657	9
328849	11
328961	31
328975	10, 15, 16
328976	11, 16, 17
328996	10
328998	11
328999	11
329150	55
329389	12
329391	11
329636	8
329697	20
329951	8
330250	19
330518	40
330648	9
330896	12
330966	54
331268	20
331366	23
331421	54
331453	26
331456	54
331467	13
350871	35
360025	36
360035	36
640174	34
640578	34
640902	34
640903	34
640904	34
640905	34
640906	34
640907	34
640908	34
640909	34
640910	34
640911	34
640913	34
640915	34
640916	34
640917	34
640918	35
640919	35
640921	35
640922	35
640923	35
640924	35
640925	35
640927	35
640929	35
640931	35
641317	35
641320	34
641321	34
641324	35
696003	44
696006	44
696007	44
696010	50
696018	34
696020	18
696024	44
696025	50
696026	50
696047	40
696048	40
696076	26
696077	26
696108	35
696116	52

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Contact Us Worldwide

Americas

Argentina – Buenos Aires
Phone: +54-11-4733-2200
Fax: +54-11-4733-2211

Brasil – São Paulo
Phone: +55-11-2103-6000
Fax: +55-11-2103-6030

Chile – Santiago
Phone: +56-2-345-0361
Fax: +56-2-223-1477

Canada – Toronto
Phone: +905-475-6222
Fax: +905-474-5520
Product Information Center:
Phone: +905-470-4425
Fax: +905-474-5525

Colombia – Bogota
Phone: +57-1-319-8959
Fax: +57-1-319-8960

Mexico – Mexico City
Phone: +52-55-1106-0800
+01-800-733-8926
Fax: +52-55-1106-0901

For Latin/South American Countries not shown
Phone: +54-11-4733-2015
Fax: +54-11-4733-2083

United States
Harrisburg, PA
Phone: +1-717-564-0100
Fax: +1-717-986-7575
Product Information Center:
Phone: +1-800-522-6752
Fax: +1-717-986-7575
Troy, MI
Phone: +1-248-273-3359
Fax: +1-248-273-3322

Asia/Pacific

Australia – Sydney
Phone: +61-2-9554-2600
Fax: +61-2-9502-2556
Product Information Center:
Phone: +61-2-9840-8200
Fax: +61-2-9634-6188

India – Bangalore
Phone: +91-80-285-40800
Fax: +91-80-285-40820

Indonesia – Jakarta
Phone: +65-6482-0311
Fax: +65-6482-1012

Japan – Kawasaki, Kanagawa
Phone: +81-44-844-8111
Fax: +81-44-812-3207
Product Information Center:
Phone: +81-44-844-8013
Fax: +81-44-812-3200

Korea – Seoul
Phone: +82-2-3415-4500
Fax: +82-2-3486-3810

Malaysia – Selangor
Phone: +60-3-7805-3055
Fax: +60-3-7805-3066

New Zealand – Auckland
Phone: +64-9-634-4580
Fax: +64-9-634-4586

Philippines – Makati City
Phone: +632-848-0171
Fax: +632-867-8661

People's Republic of China
Hong Kong
Phone: +852-2735-1628
Fax: +852-2735-0243
Shanghai
Phone: +86-21-2407-1588
Fax: +86-21-2407-1599

Singapore – Singapore
Phone: +65-6482-0311
Fax: +65-6482-1012

Taiwan – Taipei
Phone: +886-2-8768-2788
Fax: +886-2-8768-2268

Thailand – Bangkok
Phone: +66-2-955-0500
Fax: +66-2-955-0505

Vietnam – Ho Chi Minh City
Phone: +84-8-930-5546
Fax: +84-8-930-3443

Europe/Middle East/Africa

Austria – Vienna
Phone: +43-1-905-60-0
Fax: +43-1-905-60-1333
Product Information Center:
Phone: +43-1-905-60-1249
Fax: +43-1-905-60-1251

Belarus – Minsk
Phone: +375 17 237 47 94
Fax: +375 17 237 47 94

Belgium – Kessel-Lo
Phone: +32-16-352-300
Fax: +32-16-352-352

Bulgaria – Sofia
Phone: +359-2-971-2152
Fax: +359-2-971-2153

Czech Republic and Slovakia
Czech Republic – Kurim
Phone: +420-541-162-111
Fax: +420-541-162-223
Product Information Center:
Phone: +420-541-162-113
Fax: +420-541-162-132

Denmark – Glostrup
Phone: +45-43-48-04-00
Fax: +45-43-44-14-14

Egypt – Cairo
Phone: +202-419-2334
Fax: +202-417-7647

Estonia – Tartu
Phone: +372-5138-274
Fax: +372-7400-779

Finland – Helsinki
Phone: +358-95-12-34-20
Fax: +358-95-12-34-250

France – Cergy-Pontoise Cedex
Phone: +33-1-3420-8888
Fax: +33-1-3420-8600
Product Information Center:
Phone: +33-1-3420-8686
Fax: +33-1-3420-8623

France Export Divisions –
Cergy-Pontoise Cedex
Phone: +33-1-3420-8804
Fax: +33-1-3420-8699

Germany – Bensheim
Phone: +49-6251-133-0
Fax: +49-6251-133-1600
Product Information Center:
Phone: +49-6251-133-1999
Fax: +49-6251-133-1988

Greece – Athens
Phone: +30-210-9370-396/397
Fax: +30-210-9370-655

Hungary – Budapest
Phone: +36-1-289-1000
Fax: +36-1-289-1010
Product Information Center:
Phone: +36-1-289-1016
Fax: +36-1-289-1017

Ireland – Dublin
Phone: +353-1-866-5612
Fax: +353-1-866-5714

Israel – Petach-Tikva
Phone: +972-3-929-0999
Fax: +972-3-919-1088

Italy – Collegno (Torino)
Phone: +39-011-4012-111
Fax: +39-011-4031-116
Product Information Center:
Phone: +39-011-4012-428
Fax: +39-011-40-287-428

Lithuania and Latvia
Lithuania – Vilnius
Phone: +370-5-213-1402
Fax: +370-5-213-1403
Product Information Center:
Phone: +370-5-211-3016
Fax: +370-5-213-1403

Netherlands – 's-Hertogenbosch
Phone: +31-73-6246-246
Fax: +31-73-6212-365
Product Information Center:
Phone: +31-73-6246-999
Fax: +31-73-6246-998

Norway – Nesbru
Phone: +47-66-77-88-50
Fax: +47-66-77-88-55

Poland – Warsaw
Phone: +48-22-4576-700
Fax: +48-22-4576-720
Product Information Center:
Phone: +48-22-4576-704
Fax: +48-22-4576-720

Romania – Bucharest
Phone: +40-21-311-3479/3596
Fax: +40-21-312-0574

Russia – Moscow
Phone: +7-495-790-7902
Fax: +7-495-721-1893
Product Information Center:
Phone: +7-495-790-7902-404
Fax: +7-495-790-7902-401

Russia – St. Petersburg
Phone: +7-812-718-8192
Fax: +7-812-718-8193

Slovenia – Ljubljana
Phone: +386-1561-3270
Fax: +386-1561-3240

South Africa – Port Elizabeth
Phone: +27-41-503-4500
Fax: +27-41-581-0440

Spain – Barcelona
Phone: +34-93-291-0330
Fax: +34-93-201-7879

Sweden – Upplands Väsby
Phone: +46-8-50-72-50-00
Fax: +46-8-50-72-50-01

Switzerland – Steinach
Phone: +41-71-447-0447
Fax: +41-71-447-0444

Turkey – Istanbul
Phone: +90-212-281-8181/2/3
+90-212-282-5130/5430
Fax: +90-212-281-8184

Ukraine – Kiev
Phone: +380-44-206-2265
Fax: +380-44-206-2264
Product Information Center:
Phone: +380-44-206-2265
Fax: +380-44-206-2264

United Kingdom –
Stanmore, Middlesex
Phone: +44-8706-080208
Fax: +44-208-954-6234
Product Information Center:
Freephone (UK only):
0800-267-666
Phone: +44-8706-080208
Fax: +44-208-420-8095

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Engineering Notes

Catalog 82042
Revised 07-08

www.tycoelectronics.com

Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are equivalent U.S. Customary Units.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425

South America: 54-11-4733-2015
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080208

Tyco Electronics Corporation
Harrisburg, PA

82042 - Rev. 7/08 - OG3B

Tyco Electronics

Our commitment. Your advantage.