


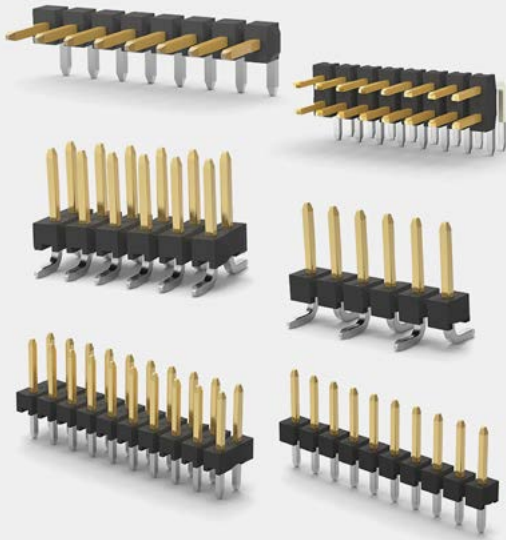

AMPMODU 2 mm BREAKAWAY HEADERS

TE Connectivity (TE) AMPMODU 2 mm connector family offers a wide variety of reliable connectors for Board-to-Board and Wire-to-Board solutions. These 2 mm headers occupy 38 percent less space on a PCB than the standard 2.54 mm [0.100"] centerline, allowing customers to build more functionality onto their boards. Our breakaway headers are intermateable with other major brand receptacles in the market. They are available in variants suitable for automated surface mounting, through-hole-reflow and traditional through-hole mounting onto boards, providing customers with a spectrum of options for PCB assembly. The product offering includes single and double row options, vertical and right angle orientations, and comes in tube and tape & reel packaging to suit different types of product handling systems.

KEY BENEFITS

- 38% space saving on a PCB board compared to 2.54 mm [0.100"] centerline, allowing for extended functionality
- Efficient and cost effective application on boards with automated surface mounting and through-hole-reflow manufacturing
- Intermateable solution with other major brand receptacles

AMPMODU 2 mm BREAKAWAY HEADERS

APPLICATIONS

- PLC / IO devices
- Servo drives
- Material handling equipment
- Building and home automation
- Industrial controls
- Robotics
- Instrumentation and test equipment

ELECTRICAL

- **Current Rating:** 2A (max.)
- **Dielectric Withstanding Voltage:** 650VAC
- **Operating Voltage:** 125VDC or 125VAC RMS

MECHANICAL

- **Operating Temperature:** -40°C to 105°C (tin plated)
-40°C to 125°C (gold plated)
- **Solderability:** Reflow capable up to 260°C
- **Vibration:** No electrical discontinuity greater than 1 microsecond

MATERIALS


- **Plating:** 30 μ" [0.76 μm] gold
15 μ" [0.38 μm] gold
4 μ" [0.1 μm] gold flash
Tin
- **Contact Material:** Phosphor bronze
- **Housing Material:** High-temperature plastic (LCP), black
- **Environmental:** UL94 V0, low halogen
Operating environment class III

SPECIFICATIONS

- **Product Specification:** [108-64040](#)
- **Application Specification:** [114-64040](#)
- RoHS & REACH compliant
- UL approval pending
- VDE Approval

AMPMODU 2 mm BREAKAWAY HEADERS

SMART PART NUMBER DEFINITION

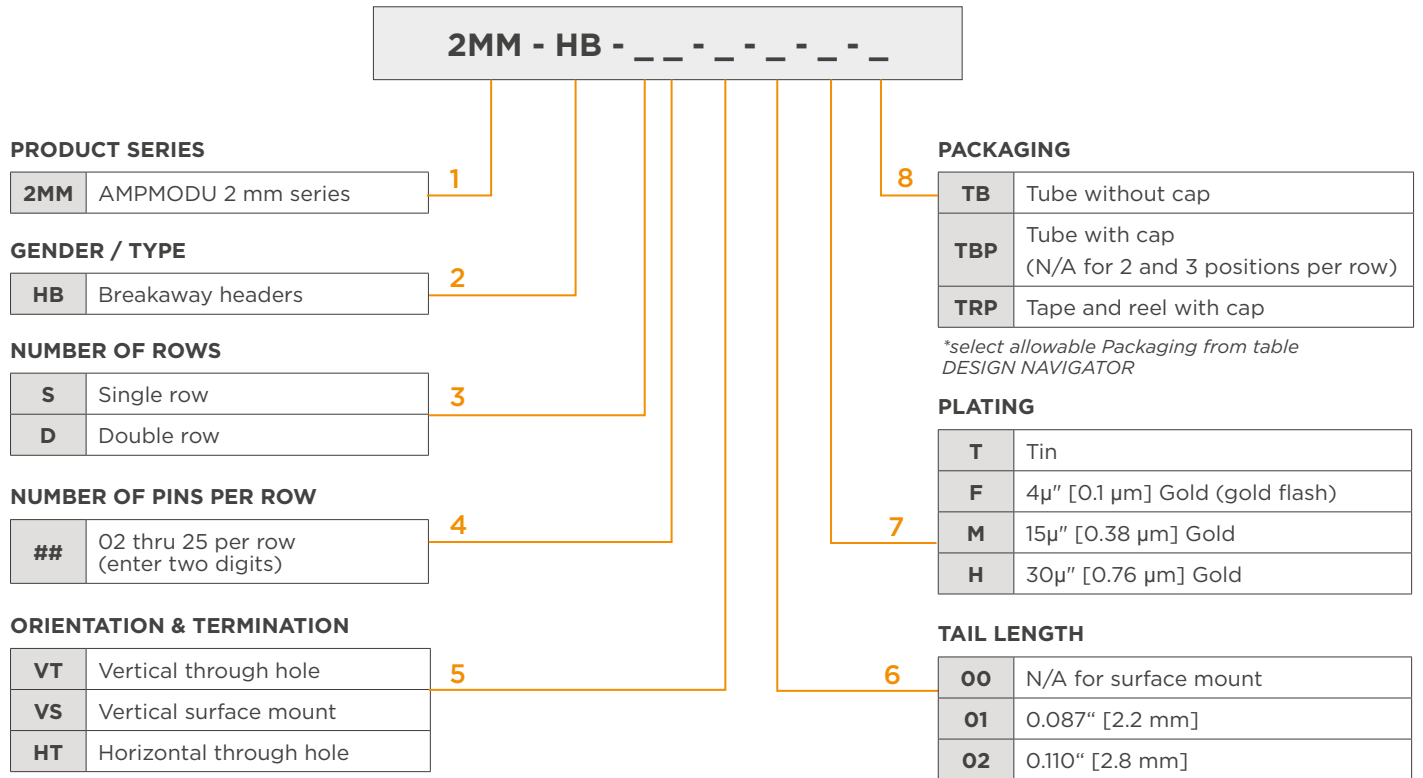

*see table DESIGN NAVIGATOR for guidance

SMART PN EXAMPLES

- AMPMODU 2 mm, breakaway header, double row, 20 positions (2 x 10), vertical surface mount, tail length: N/A, tin, T&R with cap: **2MM-HB-D10-VS-00-T-TRP**

DESIGN NAVIGATOR

Orientation & Termination		Tail Length		Packaging
VT		01	0.087" [2.2 mm]	TB
				TBP
				TRP
		02	0.110" [2.8 mm]	TB
				TBP
				TRP
VS		00	-	TRP
				TBP
HT		01	0.087" [2.2 mm]	TB
				TBP
				TRP
		02	0.110" [2.8 mm]	TB
				TBP
				TRP

AMPMODU 2 mm BREAKAWAY HEADERS

te.com

© 2022 TE Connectivity. All Rights Reserved.

AMPMODU, TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by TE Connectivity. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

06/22 MU

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[2MM-HB-D02-HT-02-H-TB](#) [2MM-HB-D05-VT-02-H-TB](#) [2MM-HB-S03-HT-02-H-TB](#) [2MM-HB-S06-HT-02-H-TB](#) [2MM-HB-D07-VT-02-H-TB](#) [2MM-HB-D08-HT-02-H-TB](#) [2MM-HB-S10-HT-02-H-TB](#) [2MM-HB-S10-VT-02-H-TB](#) [2MM-HB-S08-VT-02-H-TB](#) [2MM-HB-S04-HT-02-H-TB](#) [2MM-HB-S25-HT-02-H-TB](#) [2MM-HB-D25-VT-02-H-TB](#) [2MM-HB-D06-HT-02-H-TB](#) [2MM-HB-S02-VS-00-H-TRP](#) [2MM-HSD-S02-VT-02-H-TB](#) [2MM-HB-S02-HT-02-H-TB](#) [2MM-HB-D03-HT-02-H-TB](#) [2MM-HB-D04-HT-02-H-TB](#) [2MM-HB-D05-HT-02-H-TB](#) [2MM-HB-D10-HT-02-H-TB](#) [2MM-HB-D08-VT-02-H-TB](#) [2MM-HB-S25-VS-00-H-TRP](#) [2MM-HB-D06-VT-02-H-TB](#) [2MM-HB-S08-HT-02-H-TB](#) [2MM-HB-D02-VT-02-H-TB](#) [2MM-HB-D04-VT-02-H-TB](#) [2MM-HB-D25-VS-00-H-TRP](#) [2MM-HB-D25-HT-02-H-TB](#) [2MM-HB-D03-VT-02-H-TB](#) [2MM-HB-S02-VT-02-H-TB](#) [2MM-HB-D10-VT-02-H-TB](#) [2MM-HB-S25-VT-02-H-TB](#) [2MM-HB-S03-VT-02-H-TB](#) [2MM-HB-S04-VT-02-H-TB](#) [2MM-HSD-S02-HT-02-H-TB](#)