


Table of Contents

AC Contactors (115/208 Volt 400 Hz unless otherwise noted)

25 Ampere	
DH-14 and DHR-14 Series, 3PDT, Latching	.6-6 – 6-8
30 Ampere	
DHR-18 Series, 3PDT, Latching	.6-9
50 Ampere	
D7, DH7, DHR7, DR7 Series, 3PDT and 3PST NO	.6-10 – 6-15
D18, DH18 and DHR18 Series, 3PDT, Center Off	.6-16 – 6-18
BH-316 Series, 3PST NO, Double Break	.6-19 – 6-21
60 Ampere	
B-138 Series, TPST NO and TPDT NC	.6-22, 6-23
B-140 Series, 3PDT NO, Center Off	.6-24, 6-25
DH-7 Series, 3PDT	.6-26
100 Ampere	
D25, DH25 and DHR25 Series, 3PDT	.6-27 – 6-29
120 Ampere	
D25 and DH25 Series, 3PST NO, Latching	.6-30, 6-31
D31 Series, 3PDT, Center Off	.6-32
D31, DH-31 and DHL-31 Series, 3PDT, Center Off	.6-33 – 6-35
125 Ampere	
D-25 Series, 3PDT, Side Stable	.6-36
130 Ampere	
B-309 Series, 3PST NO, Single Break	.6-37
175 Ampere	
B-451 Series, 3PDT, Latching	.6-38
B-312 Series, 3PST NO, Double Break	.6-39, 6-40
KA175 Series, 3PST NO Side Stable	.6-41
SA136F Series, 3PST NO, Double Break	.6-42
200 Amperes	
B-312 Series, 3PST NO, Double Break	.6-43
B-393 Series, 3PDT, Center Off, Double Break	.6-44
260/350 Amperes	
B-429 Series, 3PST NO, Double Break	.6-45 – 6-47
275 Amperes	
B-430 Series, 3PST, Double Break, Latching	.6-48, 6-49
500 Amperes	
B-484 Series, 3PDT, Latching	.6-50, 6-51
Cross Reference	.6-52, 6-53


Engineering Notes

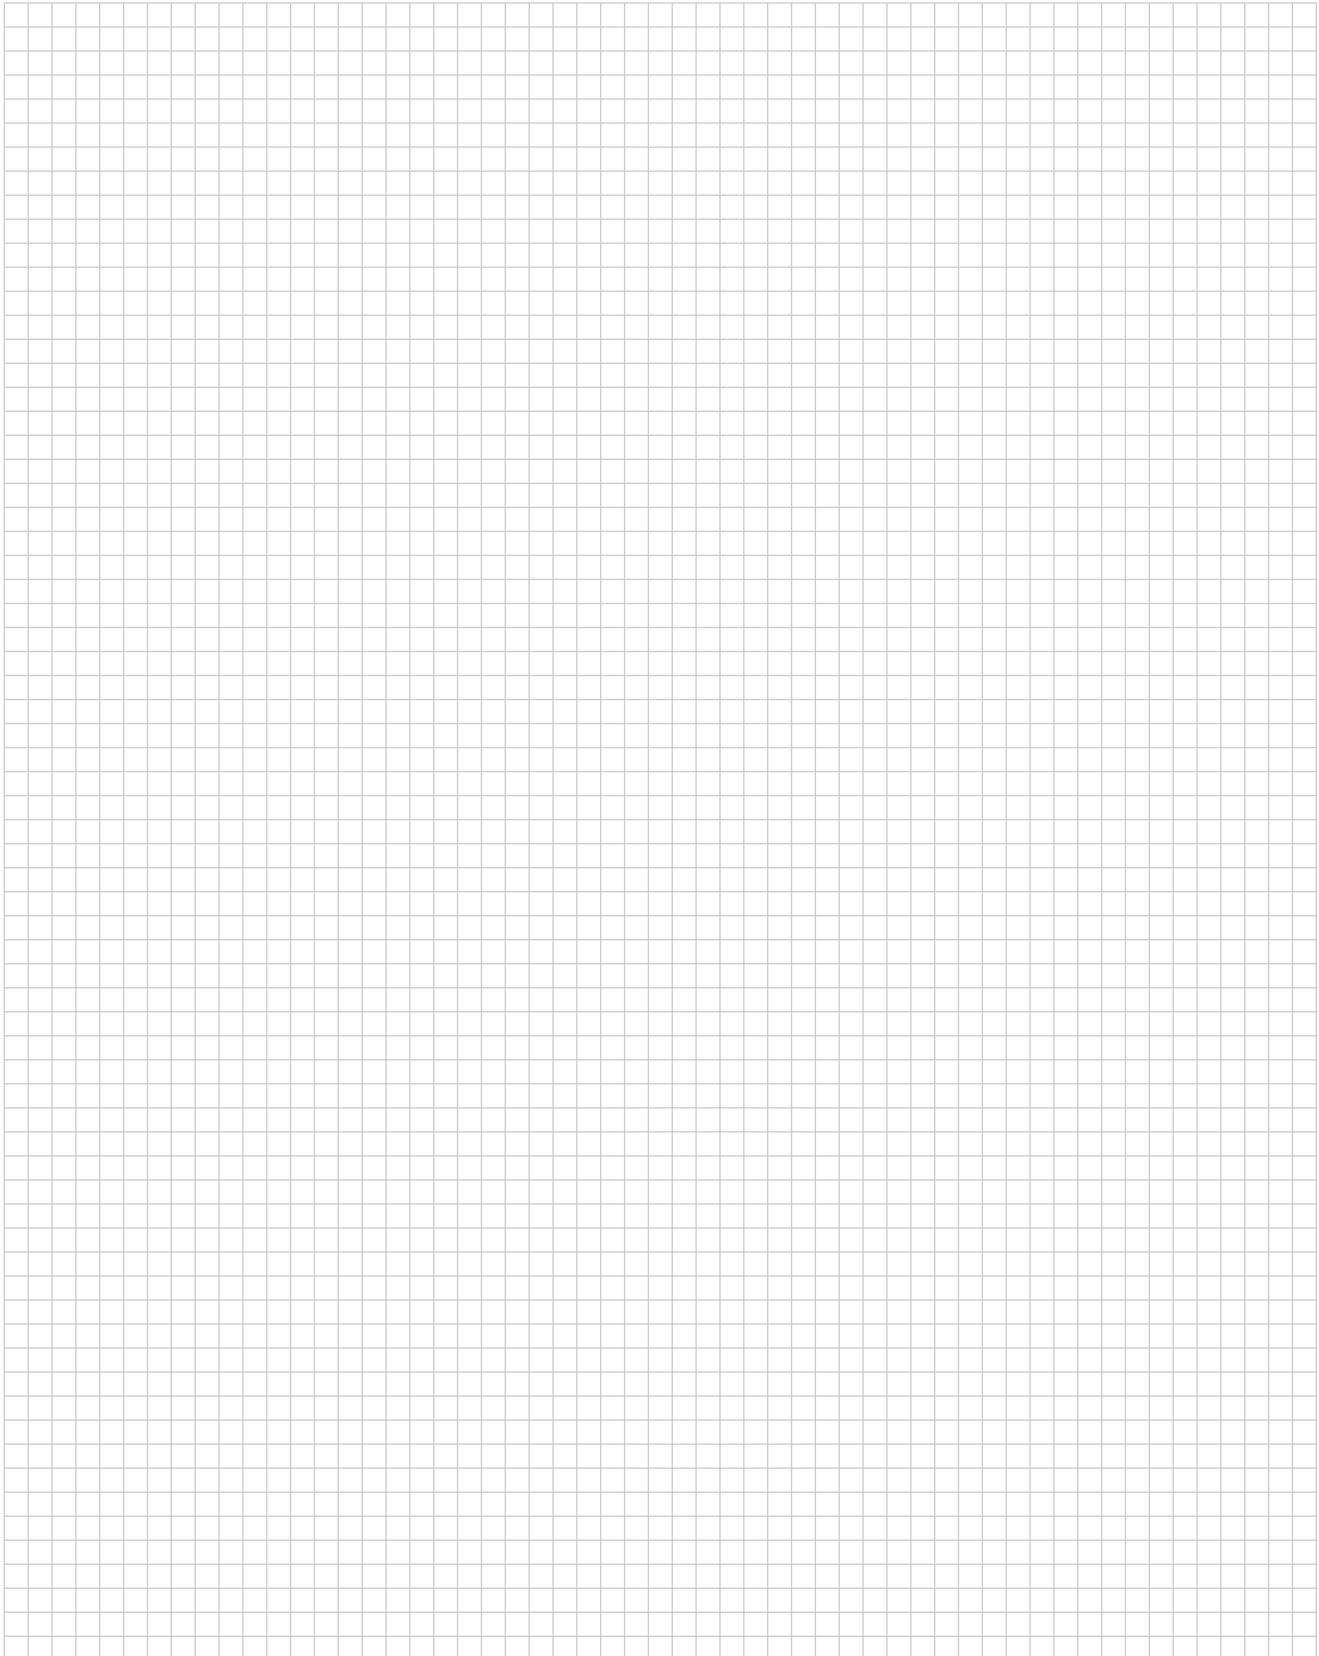

DH-14 and DHR-14 Series Contactors, Rated up to 25 Amps, 115/200 VAC, 400 Hz

Product Facts

- 3PDT
- Hermetically sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106

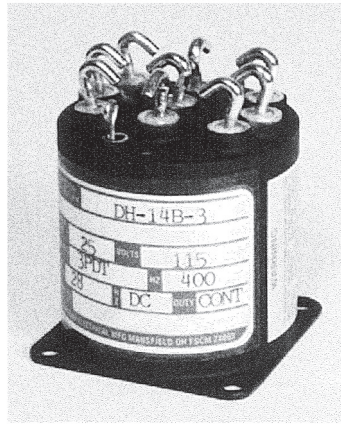

Performance Data

Electrical Characteristics

- Contact Arrangement** — 3PDT
- Rated Operating Voltage** — 115/200 VAC, 400 Hz
- Resistive Rating** — 25 Amps
- Inductive Rating** — 20 Amps
- Motor Rating** — 15 Amps

General Characteristics


- Temperature Range** — -55°C to +71°C
- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Dielectric Strength** — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms
- Insulation Resistance, Initial** — 100 megohm min.
- Altitude** — 80,000 ft.
- Weight, Max.** — .41 to .50 lbs

Duty Cycle


- VAC 400 Hz — AC Continuous (Type A, See diagram below)
- Vdc — Continuous or continuous with suppression (See diagram B & C below)
- Operating Voltage, Nom.** — VAC 400 Hz — 115 VAC
Vdc — 28 Vdc
- Pickup Voltage @ 25°C, Max.** — VAC 400 Hz — 95 VAC
Vdc — 18 Vdc
- Dropout Voltage @ 25°C, Max.** — VAC 400 Hz — 25 VAC
Vdc — 1.5 to 7 Vdc
- Coil Resistance ±20% @ 25°C** — VAC 400 Hz — N/A
Vdc — 290 Ohms

Coil Characteristics


Coil Type



A — AC Continuous



B — Continuous




C — Continuous with Suppression


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

**DH-14 and DHR-14 Series Contactors, Rated up to 25 Amps,
115/200 VAC, 400 Hz (Continued)**


Circuit Configurations (Consult factory for other available circuit configurations)




Circuit Configuration 1



Circuit Configuration 2



Circuit Configuration 3



Circuit Configuration 4


HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Connectivity Part Number
DH-14B	Hermetically Sealed	C	B	4	1-1616522-4
DH-14B-3	Hermetically Sealed	A	C	1	1616037-1
DH-14CE	Hermetically Sealed	A	C	2	1616017-1
DHR-14B	Hermetically Sealed	A	A	3	1-1616037-2
DHR-14BA	Hermetically Sealed	B	A	3	1-1616037-3

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

DHR-18 Series, Rated up to 30 Amps, 115 VAC, 400 Hz

Product Facts

- 3PDT, Center off
- Hermetically sealed

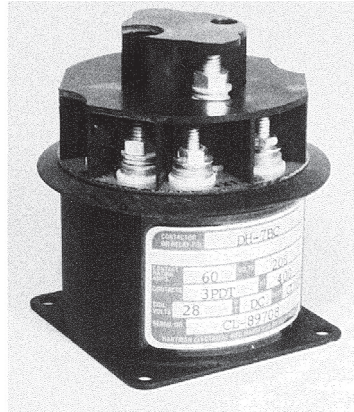

Performance Data

Electrical Characteristics

Contact Arrangement — 3PDT, Center Off

Rated Operating Voltage — 115 VAC, 400 Hz

Resistive Rating — 30 Amps

Inductive Rating — 20 Amps

General Characteristics

Operating Temperature — 71°C

Weight, Max. — 14 oz.

Coil Characteristics


Duty Cycle — Continuous

Coil Rating — 115 VAC, 400 Hz

Pickup Voltage, Max. — 90 Vdc, Hot


Dropout Voltage — 45 ± 20 Vdc

Current at 115 Vdc & 25°C — 0.28 Amp max.

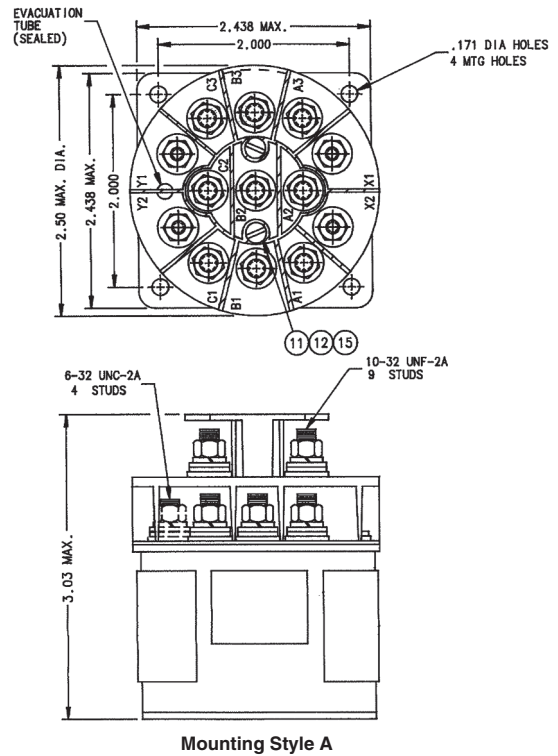

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
DHR-18-1	Hermetically Sealed	A	Continuous	1	1616050-9

**D7, DH7, DHR7, DR7 Series, Rated up to 50 Amps,
115/200 VAC, 400 Hz**

Product Facts

- 3PDT and 3PST NO
- Gasket sealed or Hermetically sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106



Performance Data

Electrical Characteristics

- Contact Arrangement** — 3PDT and 3PST NO
- Rated Operating Voltage** — 115/200 VAC, 400 Hz, 3 phase
- Resistive Rating** — 50 Amps
- Inductive Rating** — 50 Amps
- Motor Rating** — 30 Amps
- Lamp Rating** — 15 Amps


General Characteristics

- Temperature Range** — -55°C to +71°C
- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Dielectric Strength** — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms
- Insulation Resistance, Initial** — 100 megohm min.
- Altitude** — D7, DR7 — 50,000 ft
DH7, DHR7 — 80,000 ft
- Weight, Max.** — .94 to 1.20 lbs


Coil Characteristics

- Duty Cycle** — VAC 400 Hz — AC Continuous (Type A & E, See diagram below)
Vdc — Continuous (Type B, See diagram below)
Vdc — Continuous with suppression (Type C & D, See diagram below)
- Operating Voltage, Nom.** — VAC 400 Hz — 115 VAC
Vdc — 28 Vdc
- Pickup Voltage @ 25°C, Max.** — VAC 400 Hz — 75 VAC
Vdc — 18 Vdc
- Dropout Voltage @ 25°C, Max.** — VAC 400 Hz — 12 to 38 VAC
Vdc — 1 to 7 Vdc
- Coil Resistance ±20% @ 25°C** — VAC 400 Hz — 505 Ohms
Vdc — 126 Ohms
- Coil Current @ 25°C, Max.** — VAC 400 Hz — .065 Amp
Vdc — .28 Amp


Coil Type




A — AC Continuous




B — Continuous



C — Continuous with Suppression



D — Continuous with Suppression





E — AC Continuous


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

**D7, DH7, DHR7, DR7 Series, Rated up to 50 Amps,
115/200 VAC, 400 Hz (Continued)**


TERMINAL SHIELD CUTOUT
.270 MAX, 7 PLACES.

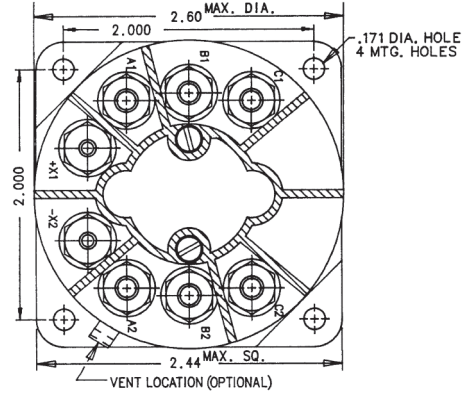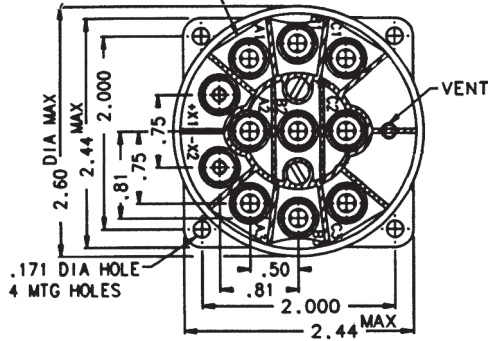




.437 MAX LUG DIA
6-32 UNC-2A
2 STUDS

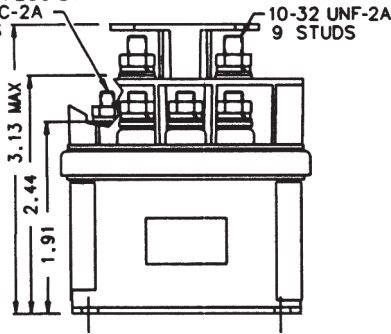


Mounting Style A

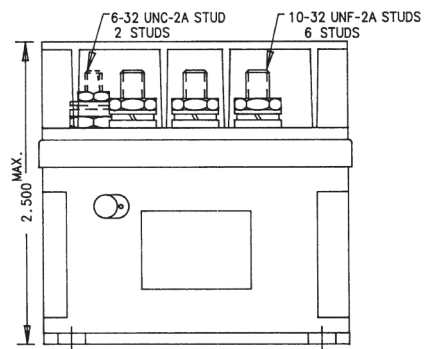

Mounting Style B

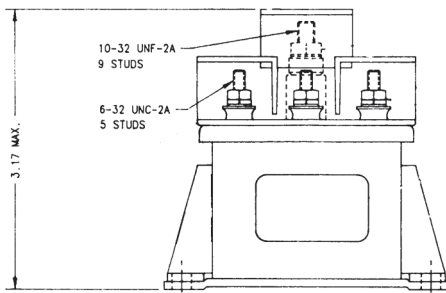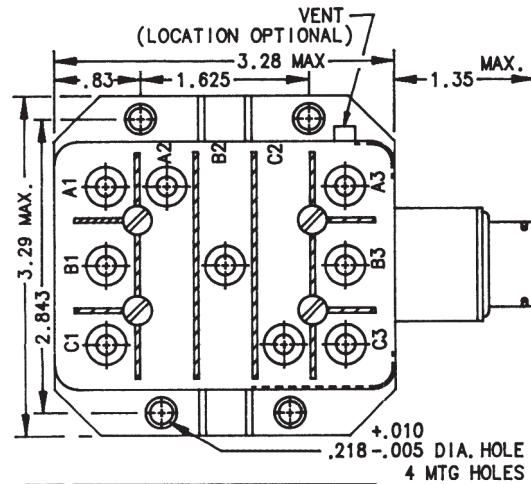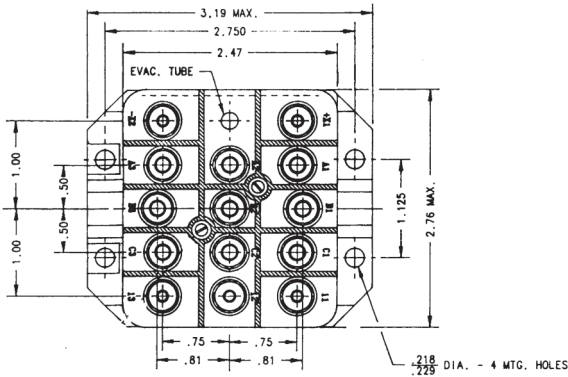

Mounting Style C

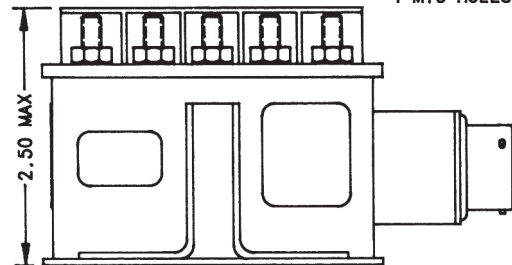


Mounting Style D


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

**D7, DH7, DHR7, DR7 Series, Rated up to 50 Amps,
115/200 VAC, 400 Hz (Continued)**


Circuit Configurations (Consult factory for other available circuit configurations)




Circuit Configuration 1




Circuit Configuration 2




Circuit Configuration 3

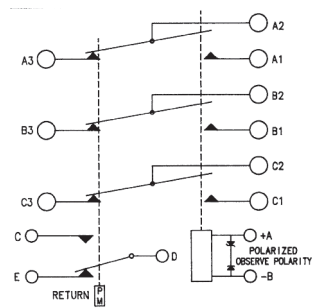


Circuit Configuration 4




Circuit Configuration 5




Circuit Configuration 6




Circuit Configuration 7




Circuit Configuration 8




Circuit Configuration 9




Circuit Configuration 10

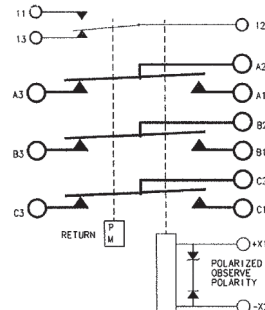


Circuit Configuration 11

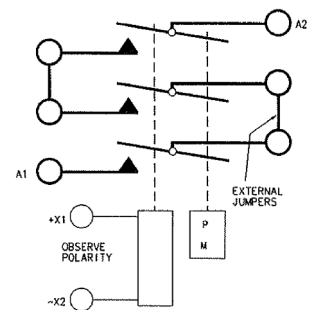


Circuit Configuration 12




Circuit Configuration 13



Circuit Configuration 14




Circuit Configuration 15




Circuit Configuration 16

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

**D7, DH7, DHR7, DR7 Series, Rated up to 50 Amps,
115/200 VAC, 400 Hz (Continued)**



Circuit Configuration 17



Circuit Configuration 18


HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
D-7BS	Gasket/Vented	A	C	1	1616036-1
D-7M	Gasket/Vented	B	C	2	1616016-2
D-7GR-2	Gasket/Vented	C	B	3	1616036-3
D-7GRZ	Gasket/Vented	D	C	4	1616036-5
DH-7BB	Hermetically Sealed	A	B	5	1616037-7
DH-7N	Hermetically Sealed	B	B	6	1616017-9
DH-7ZG-1	Hermetically Sealed	C	C	7	1-1616017-1
DHR-7ZG	Hermetically Sealed	C	A	8	1-1616017-2
DR-7VC	Hermetically Sealed	B	A	9	1616018-1
D-7GR	Gasket/Vented	E	B	10	1616036-2
D-7GR-3	Gasket/Vented	F	B	11	1616036-4
D-7MA	Gasket/Vented	G	B	12	1616016-3
D-7MM	Gasket/Vented	H	C	18	1616016-4
DH-7GR	Hermetically Sealed	E	C	11	1616037-9
DH-7ZAB	Hermetically Sealed	H	D	13	1-1616037-1
DHR-7B	Hermetically Sealed	I	E	14	1-1616037-6
DHR-7BE	Hermetically Sealed	J	A	15	1-1616037-7
DHR-7K	Hermetically Sealed	K	E	16	1616522-2
DHR-7M	Hermetically Sealed	L	E	17	1616518-2

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

**D18, DH18 and DHR18 Series, Rated up to 50 Amps,
115/200 VAC, 400 Hz**

Product Facts

- 3PDT, Center off
- Gasket sealed or Hermetically sealed
- Meets many requirements of MIL-PRF-6106

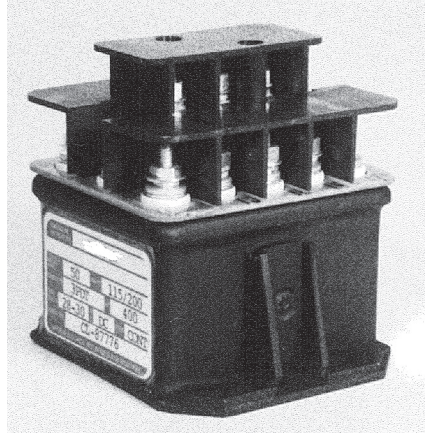

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

Performance Data

Electrical Characteristics

Contact Arrangement — 3PDT, Center Off

Rated Operating Voltage — 115/200 VAC, 400 Hz

Resistive Rating — 50 Amps

Inductive Rating — 50 Amps

Motor Rating — 30 Amps

Lamp Rating — 15 Amps

Rupture Rating — 400 Amps

General Characteristics

Temperature Range — -55°C to +71°C

Operating Cycles (Life) at Rated Resistive Load, Min. — 50,000 cycles

Operating Cycles (Life) Mechanical, Min. — 100,000 cycles

Dielectric Strength — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms

Insulation Resistance, Initial — 100 megohm min.

Altitude — D-18 — 50,000 ft.
DH-18, DHR-18 — 80,000 ft.

Weight, Max. — .94 to 1.50 lbs

Sinusoidal Vibration — 10 G @ 70 to 2,000 Hz

Shock, Max. — 25 G

Operate Time @ Nom. Voltage, Max. — 35 msec

Release Time @ Nom. Voltage, Max. — 15 msec

Bounce Time @ Nom. Voltage, Max. — 5 msec

Coil Characteristics

Duty Cycle —

AC Continuous (Type E, See diagram below)

DC Continuous (Type A-D, See diagram below)

Operating Voltage, Nom. — 28 Vdc

Pickup Voltage @ 25°C, Max. —

Coil Type A — 18 Vdc

Coil Type B — 15 Vdc

Dropout Voltage @ 25°C, Max. —

Coil Type A — 1.5 to 7 Vdc

Coil Type B — 2.5 to 6.5 Vdc


Coil Resistance ±20% @ 25°C —

175 Ohms


Coil Current @ 25°C, Max. —

.175 Amp


Coil Type

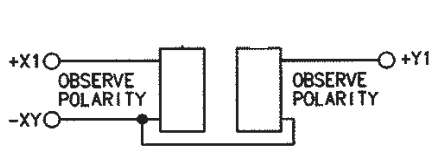


A — DC Continuous




B — DC Continuous

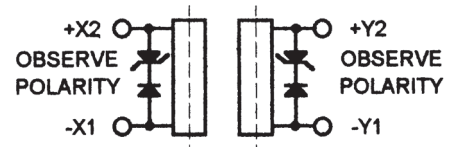

C — DC Continuous with Suppression



D — DC Continuous - Economical w/Suppression




E — AC Continuous


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

D18, DH18 and DHR18 Series Contactors, Rated up to 50 Amps, 115/200 VAC, 400 Hz (Continued)


Circuit Configurations (Consult factory for other available circuit configurations)




Circuit Configuration 1




Circuit Configuration 2




Circuit Configuration 3

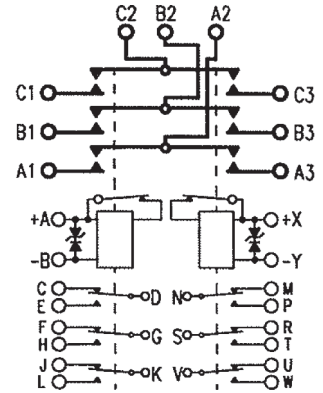


Circuit Configuration 4



Circuit Configuration 5



Circuit Configuration 6

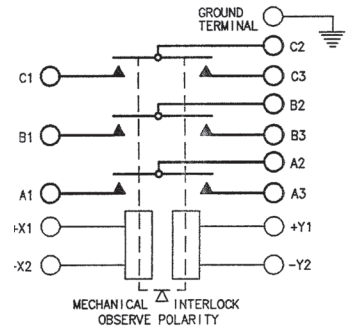

Circuit Configuration 7


HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
D-18	Gasket/Vented	A	A	1	1616048-1
D-180A	Gasket/Vented	D	C	6	1616048-2
D-18AA	Gasket/Vented	A	B	2	1616048-3
D-18F	Gasket/Vented	A	B	3	1616048-4
D-18ZZC	Gasket/Vented	B	D	4	1-1616957-3
DH-18	Hermetically Sealed	A	A	1	1616050-1
DH-18Y	Hermetically Sealed	A	A	7	1616524-3
DR-18E-5	Gasket/Vented	C	E	5	1616099-1

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

BH-316 Series, Rated up to 50 Amps, 115/200 VAC, 400 Hz or 28 Vdc

Product Facts

- 3PST NO, Double break
- Hermetically sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106

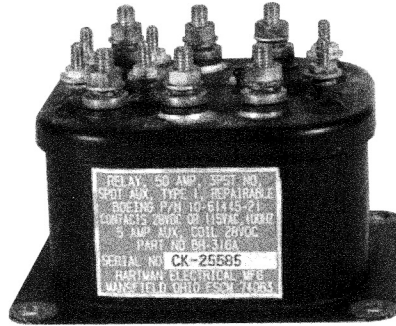

Performance Data

Electrical Characteristics

Contact Arrangement — 3PST NO, Double Break

Rated Operating Voltage — 28 Vdc or 115/200 VAC, 400 Hz, 3 phase

Resistive Rating — 50 Amps

Inductive Rating — 115/200 VAC, 400 Hz, 3 phase — 50 Amps
At 28 Vdc — 25 Amps

Motor Rating — 50 Amps

General Characteristics

Temperature Range — -55°C to +125°C

Operating Cycles (Life) at Rated Resistive Load, Min. — 100,000 cycles

Operating Cycles (Life) Mechanical, Min. — 200,000 cycles

Dielectric Strength — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms

Insulation Resistance, Initial — 100 megohm min.

Weight, Max. — 1.20 lbs

Impact Shock — 5 G

Close Time @ 28 Vdc and 25°C, Max. — 25 msec

Release Time @ 28 Vdc and 25°C, Max. — 10 msec

Coil Characteristics

Duty Cycle — Continuous


Operating Voltage, Nom. — 28 Vdc

Pickup Voltage, Max. — 18 Vdc


Dropout Voltage — 1.5 to 7 Vdc

Coil Current, Holding, Max. — 0.5 Amp

Coil Type





A — Continuous





B — Continuous w/Suppression

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.



BH-316 Series, Rated up to 50 Amps, 115/200 VAC, 400 Hz or 28 Vdc (Continued)

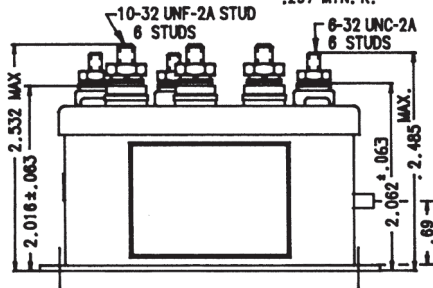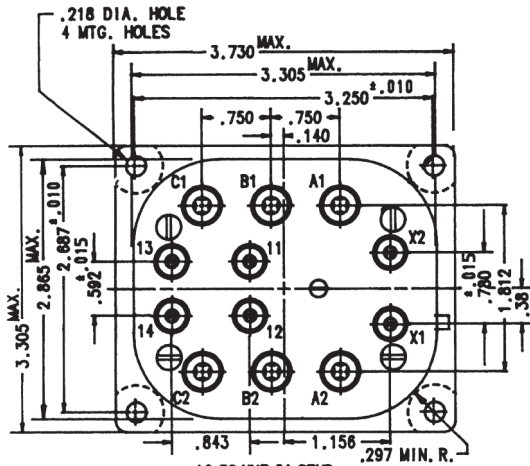

Mounting Style A

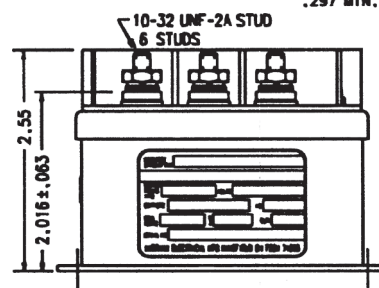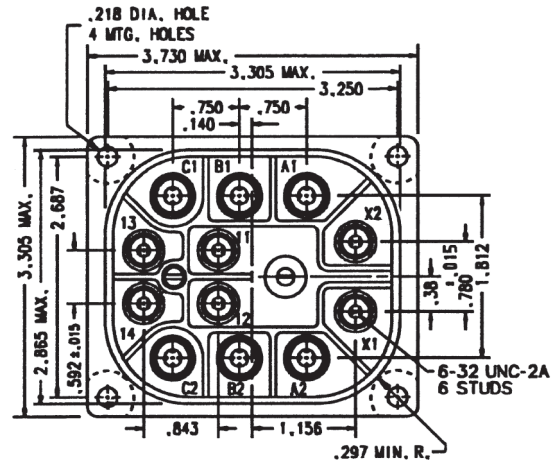

Mounting Style B

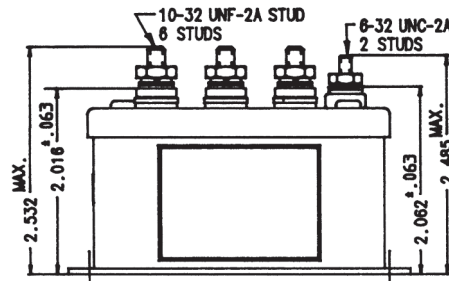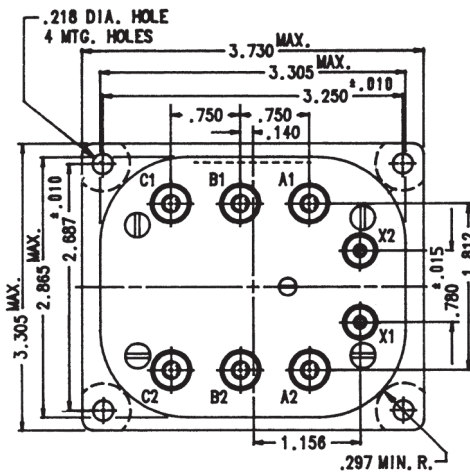


Mounting Style C

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

BH-316 Series, Rated up to 50 Amps, 115/200 VAC, 400 Hz or 28 Vdc (Continued)

Circuit Configurations (Consult factory for other available circuit configurations)

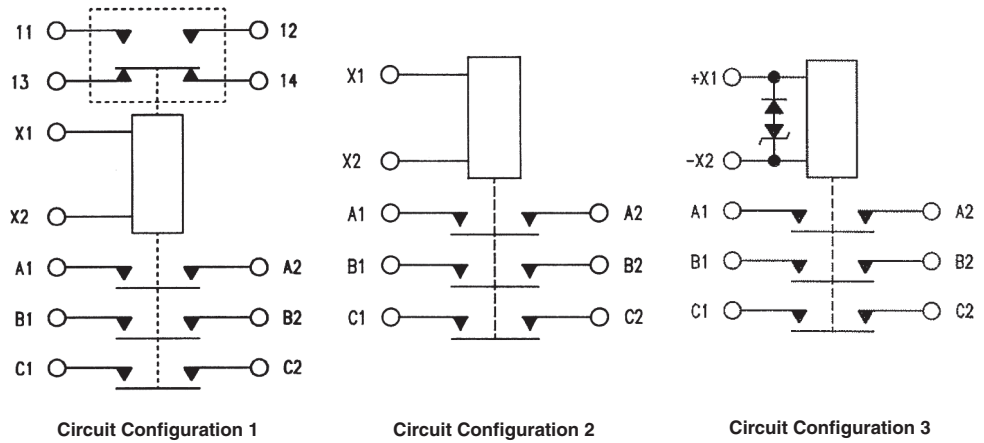


HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
BH-316	Hermetically Sealed	A	Continuous	2	1616008-4
BH-316A	Hermetically Sealed	A	Continuous	1	1616008-5
BH-316D	Hermetically Sealed	A	Continuous	1	1616008-6
BH-316C	Hermetically Sealed	B	Continuous	3	1-1616520-0

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-138 Series, Rated up to 60 Amps, 115/200 VAC, 400 Hz

Product Facts

- TPST NO and TPDT NC
- Gasket sealed or Hermetically sealed
- 115/200 VAC, 400 Hz, 3 phase
- Auxiliary contacts available
- Meets the requirements of MIL-PRF-6106

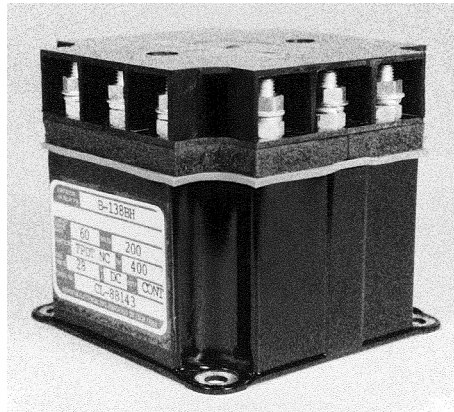

Performance Data

Electrical Characteristics

- Contact Arrangement** — TPST NO and TPDT NC
- Rated Operating Voltage** — 115/200 VAC, 400 Hz, 3 phase
- Current, Resistive** — 60 Amps
- Current, Inductive** — 60 Amps
- Current, Motor** — 60 Amps
- Current, Rupture** — 600 Amps


General Characteristics

- Temperature Range** — -55°C to +71°C
- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Dielectric Strength** — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms
- Altitude Max.** — 50,000 ft.
- Weight, Nominal** — 1.50 to 2.0 lbs


Coil Characteristics

- Duty Cycle** — Continuous or continuous with suppression
- Operating Voltage, Nom.** — 28 Vdc
- Pickup Voltage, Max. @ 85°C** — 18 Vdc
- Dropout Voltage, Max.** — 1.5 to 7 Vdc
- Coil Current @ 29 Vdc Max. @ 25°C** — 0.5 Amps
- Inrush** — 5 Amps


Coil Type



A — Continuous




B — Continuous with Suppression




C — Continuous with Suppression

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-138 Series, Rated up to 60 Amps, 115/200 VAC, 400 Hz (Continued)

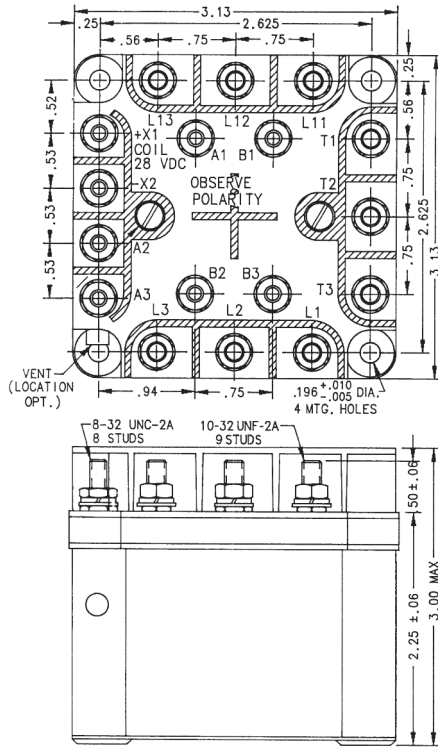


Mounting Style A

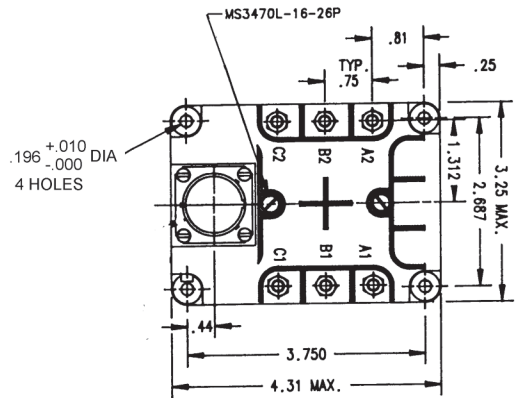


Mounting Style B


Circuit Configurations (Consult factory for other available circuit configurations)




Circuit Configuration 1



Circuit Configuration 2



Circuit Configuration 3



Circuit Configuration 4


HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B-138S	Gasket/Vented	B	B	2	1616002-5
B-138XEH	Gasket/Vented	A	C	4	1616028-3
B-138BH	Gasket/Vented	A	A	1	1616028-1
B-138XAH	Gasket/Vented	A	A	3	1616028-2

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-140 Series, Rated up to 60 Amps, 115/200 VAC, 400 Hz

Product Facts

- 3PDT NO, Center off
- Gasket sealed or Hermetically sealed
- 115/200 VAC, 400 Hz, 3 phase
- Auxiliary contacts available
- Meets the requirements of MIL-PRF-6106

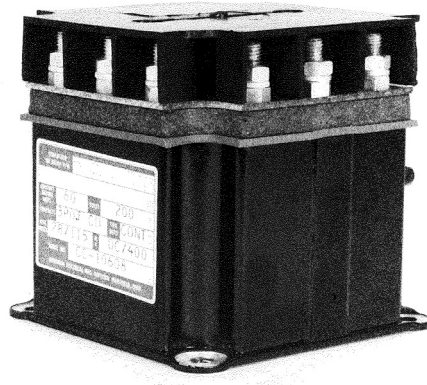

Performance Data

Electrical Characteristics

- Contact Arrangement** — 3PDT NO, Center Off
- Rated Operating Voltage** — 115/200 VAC, 400 Hz, 3 phase
- Current, Resistive** — 60 Amps
- Current, Inductive** — 60 Amps
- Current, Motor** — 60 Amps
- Current, Rupture** — 600 Amps


General Characteristics

- Temperature Range** — -55°C to +120°C
- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Dielectric Strength** — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms
- Insulation Resistance, Initial** — 100 megohm min.
- Altitude Max.** — 50,000 ft.
- Weight, Nominal** — 1.50 to 2.31 lbs
- Sinusoidal Vibration** — 10 G @ 70 to 2,000 Hz
- Shock, Max.** — 15 G


Coil Characteristics

- Duty Cycle** — Continuous (Type A or B, See diagram below)
- Operating Voltage, Nom.** — 28 Vdc
- Pickup Voltage, Max. @ 85°C** — 18 Vdc
- Dropout Voltage, Max.** — 1.5 to 7 Vdc
- Coil Current @ 29 Vdc Max. @ 25°C** — 0.35 Amps
- Inrush** — 5 Amps


Coil Type

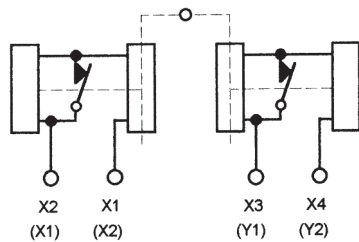

A — Continuous

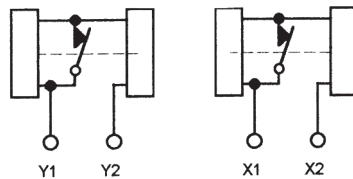

B — Continuous

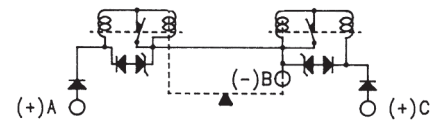

C — Continuous w/Suppression

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

DH-7 Series, Rated up to 60 Amps, 115/200 VAC, 400 Hz

Product Facts

- 3PDT
- Hermetically sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106



Performance Data

Electrical Characteristics

Contact Arrangement — 3PDT

Rated Operating Voltage — 115/200 VAC, 400 Hz, 3 phase

Resistive Rating — 60 Amps

General Characteristics

Temperature Range — -55°C to +71°C

Operating Cycles (Life) at Rated Resistive Load, Min. — 50,000 cycles


Operating Cycles (Life) Mechanical, Min. — 100,000 cycles

Dielectric Strength — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms

Altitude — 80,000 ft
Weight, Max. — .91 lbs


Coil Characteristics

Duty Cycle — Continuous
Operating Voltage, Nom. — 28 Vdc
Pickup Voltage @ 25°C, Max. — 18 Vdc
Dropout Voltage @ 25°C, Max. — 1.5 to 7 Vdc
Coil Resistance ±20% @ 25°C — 126 Ohms
Coil Current @ 25°C, Max. — .28 Amp

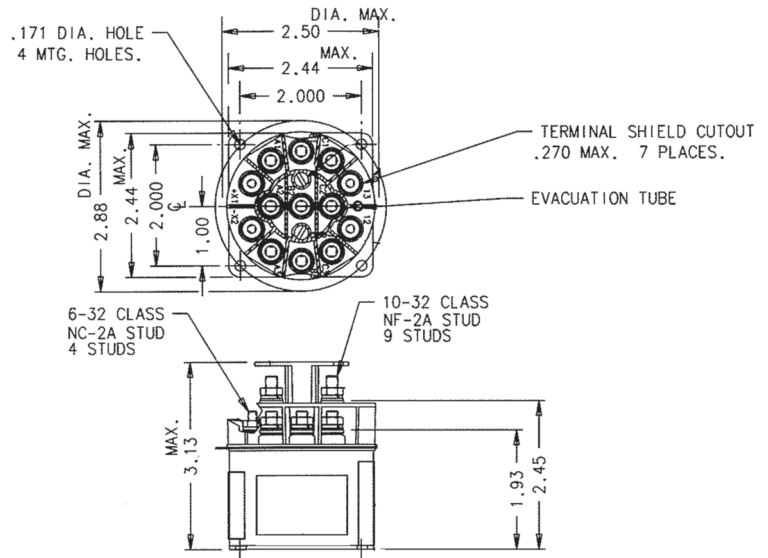

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
DH-7BC	Hermetically Sealed	A	Continuous	1	1616037-8

**D25, DH25 and DHR25 Series, Rated up to 100 Amps,
115/200 VAC, 400 Hz**

Product Facts

- 3PDT NO
- Gasket sealed or Hermetically sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106

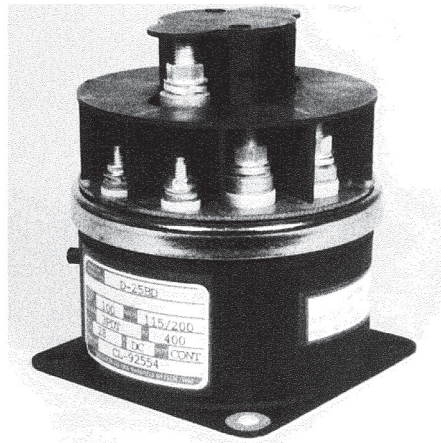

Performance Data

Electrical Characteristics

- Contact Arrangement** — 3PDT NO
- Rated Operating Voltage** — 115/200 VAC, 400 Hz, 3 phase
- Resistive Rating** — 100 Amps
- Inductive Rating** — 100 Amps


General Characteristics

- Temperature Range** — -55°C to +85°C
- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Dielectric Strength** — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms
- Insulation Resistance, Initial** — 100 megohm min.
- Altitude** — D-25 — 50,000 ft.
DH-25, DHR-25 — 80,000 ft.
- Weight, Max.** — 2.20 to 2.75 lbs
- Sinusoidal Vibration** — 10 G @ 70 to 2,000 Hz
- Shock, Max.** — 25 G
- Operate Time @ Nom. Voltage, Max.** — 35 msec
- Release Time @ Nom. Voltage, Max.** — 35 msec
- Bounce Time @ Nom. Voltage, Max.** — 5 msec


Coil Characteristics

- Duty Cycle** — VAC 400 Hz — AC (Type A, See diagram below)
Vdc — Continuous (Type B, See diagram below)
Vdc — Continuous with suppression (Type C, See diagram below)
- Operating Voltage, Nom.** — VAC 400 Hz — 115 VAC
Vdc — 28 Vdc
- Pickup Voltage @ 25°C, Max.** — VAC 400 Hz — 103.5 VAC
Vdc — 18 Vdc
- Dropout Voltage @ 25°C, Max.** — VAC 400 Hz — 5 to 45 VAC
Vdc — 1.5 to 7 Vdc
- Coil Resistance ±20% @ 25°C** — VAC 400 Hz — N/A
Vdc — 175 Ohms


Coil Type



A — AC




B — Continuous





C — Continuous with Suppression

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.



**D25, DH25 and DHR25 Series, Rated up to 100 Amps,
115/200 VAC, 400 Hz (Continued)**

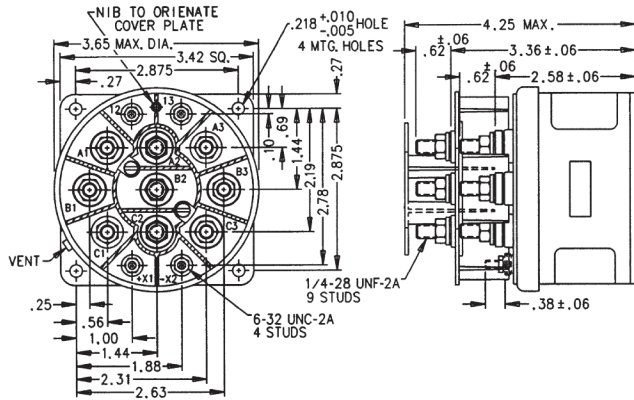

Mounting Style A

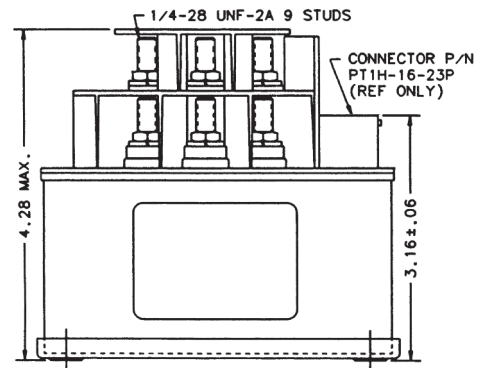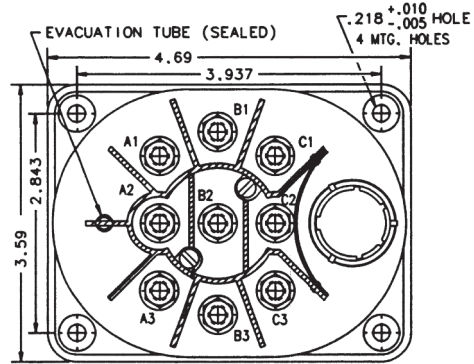

Mounting Style B

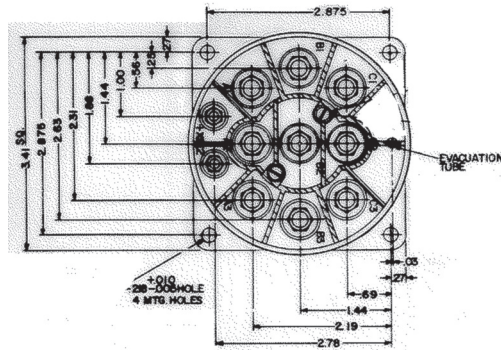


Mounting Style C


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

**D25, DH25 and DHR25 Series, Rated up to 100 Amps,
115/200 VAC, 400 Hz (Continued)**


Circuit Configurations (Consult factory for other available circuit configurations)

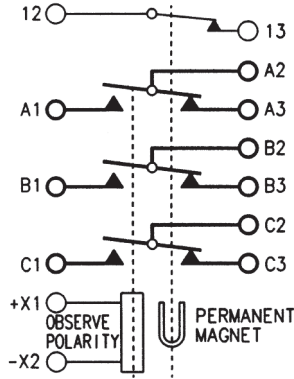


Circuit Configuration 1



Circuit Configuration 2



Circuit Configuration 3



Circuit Configuration 4

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
D-25BD	Gasket/Vented	A	B	1	1616034-3
DH-25B	Hermetically Sealed	C	B	4	1616037-2
DH-25BA	Hermetically Sealed	B	B	2	1616037-3
DHR-25BG	Hermetically Sealed	A	A	3	1-1616037-5

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

**D25 and DH25 Series, Rated up to 120 Amps,
115/200 VAC, 400 Hz**

Product Facts

- 3PST NO
- Gasket sealed or Hermetically sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106



Performance Data

Electrical Characteristics

- Contact Arrangement** — 3PST NO
- Rated Operating Voltage** — 115/200 VAC, 400 Hz, 3 phase
- Resistive Rating** — 120 Amps
- Inductive Rating** — 120 Amps
- Motor Rating** — 100 Amps
- Rupture Rating** — 1,000 Amps


General Characteristics

- Temperature Range** — -55°C to +85°C
- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Dielectric Strength** — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms
- Altitude** — D-25 — 50,000 ft.
DH-25 — 80,000 ft.
- Weight, Max.** — 2.10 lbs


Coil Characteristics

- Duty Cycle** — Vdc — Continuous (Type A, See diagram below)
Vdc — Continuous with suppression (Type B, See diagram below)
- Operating Voltage, Nom.** — 28 Vdc
- Pickup Voltage @ 25°C, Max.** — 18 Vdc
- Dropout Voltage @ 25°C, Max.** — 1.5 to 7 Vdc
- Coil Resistance ±20% @ 25°C** — 113 Ohms

Coil Type





A — Continuous




B — Continuous with Suppression

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.


**D25 and DH25 Series, Rated up to 120 Amps,
115/200 VAC, 400 Hz (Continued)**

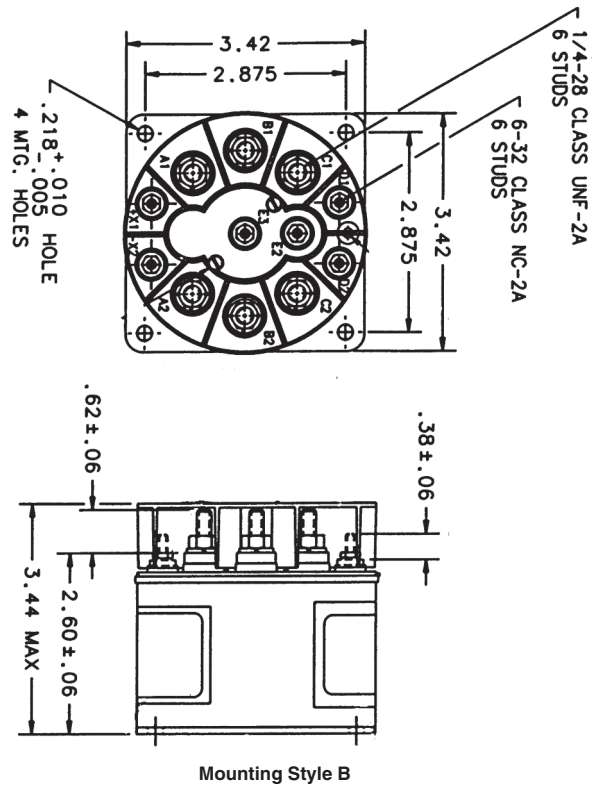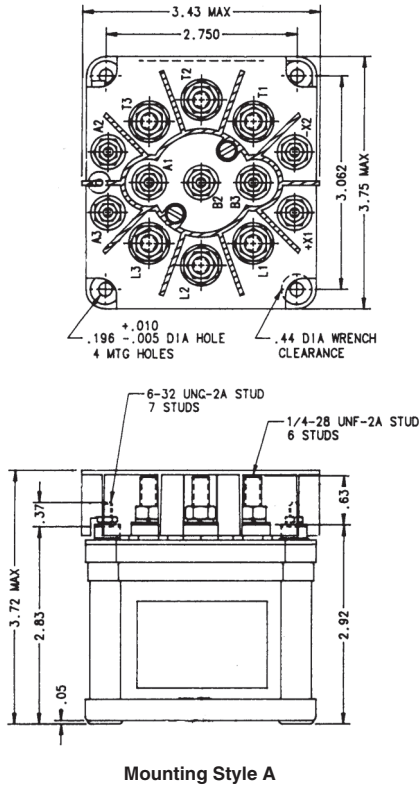

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1



Circuit Configuration 2

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
D-25CF	Gasket/Vented	A	A	1	1616015-1
DH-25CU	Hermetically Sealed	B	B	2	1616017-4

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

D-31 Series, Rated up to 100 Amps, 115/200 VAC, 400 Hz

Product Facts

- 3PDT, Center off
- Hermetically sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106



Performance Data

Electrical Characteristics

Contact Arrangement — 3PDT, Center Off

Rated Operating Voltage — 115/200 VAC, 400 Hz, 3 phase

Resistive Rating — 100 Amps

General Characteristics

Temperature Range — -55°C to +71°C

Operating Cycles (Life) at Rated Resistive Load, Min. — 50,000 cycles

Operating Cycles (Life) Mechanical, Min. — 100,000 cycles

Dielectric Strength — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms


Altitude — 50,000 ft
Weight, Max. — 2.31 lbs

Coil Characteristics

Duty Cycle — Continuous
Operating Voltage, Nom. — 28 Vdc
Pickup Voltage @ 71°C, Max. — 18 Vdc


Dropout Voltage, Max. — 1.5 to 7 Vdc

Coil Resistance ±20% @ 25°C — 160 Ohms

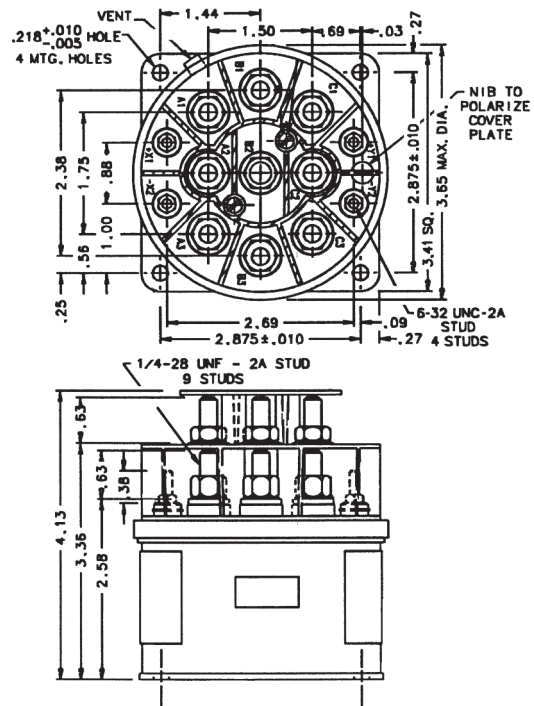

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
D-31C	Gasket/Vented	A	Continuous	1	1616049-1

**D-31, DH-31, and DHL-31 Series, Rated up to 120 Amps,
115/200 VAC, 400 Hz**

Product Facts

- 3PDT, Center off
- Gasket sealed or Hermetically sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106



Performance Data

Electrical Characteristics

- Contact Arrangement** — 3PDT, Center Off
- Rated Operating Voltage** — 115/200 VAC, 400 Hz, 3 phase
- Resistive Rating** — 120 Amps
- Inductive Rating** — 120 Amps
- Motor Rating** — 80 Amps
- Rupture Rating** — 1,000 Amps


General Characteristics

- Temperature Range** — -55°C to +71°C
- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Dielectric Strength** — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms
- Altitude** — D-31 — 50,000 ft
DH-31, DHL-31 — 70,000 ft
- Weight** — 2.60 lbs


Coil Characteristics

- Duty Cycle** — Continuous (Type A, See diagram below)
Continuous with suppression (Type B or Type C, See diagram below)
- Operating Voltage, Nom.** — 28 Vdc
- Pickup Voltage @ 25°C, Max.** — Coil Type A and C — 18 Vdc
Coil Type B — 15 Vdc
- Dropout Voltage @ 25°C, Max.** — Coil Type A and C — 1.5 to 7 Vdc
Coil Type B — 2 to 7 Vdc
- Coil Resistance ±20% @ 25°C** — Coil Type A — N/A
Coil Type B — 100 Ohms
Coil Type C — 132 Ohms
- Coil Current @ 25°C, Max.** — .350 Amp


Coil Type

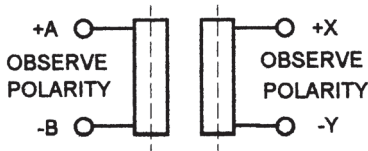


A — Continuous

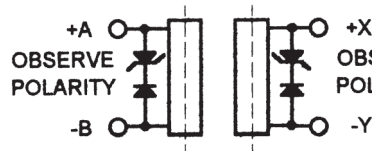

B — Continuous with Suppression

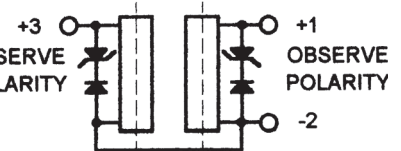



C — Continuous with Suppression

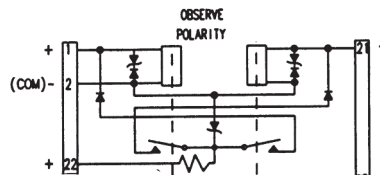



D — Latching

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.



**D-31, DH-31, and DHL-31 Series, Rated up to 120 Amps,
115/200 VAC, 400 Hz (Continued)**

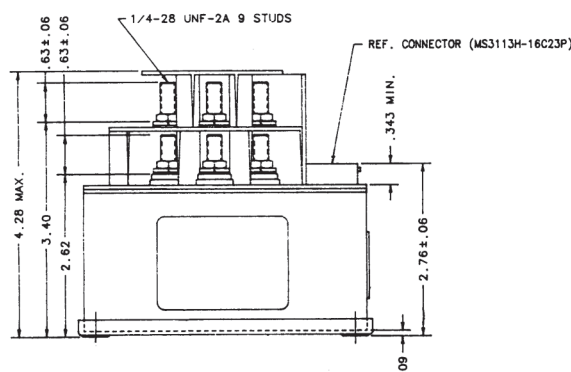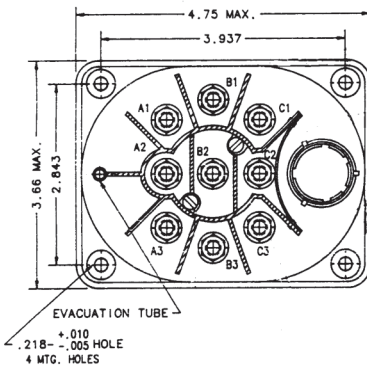

Mounting Style A

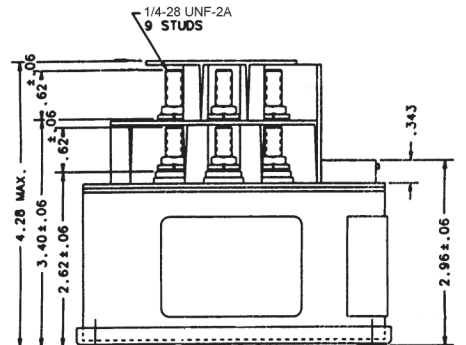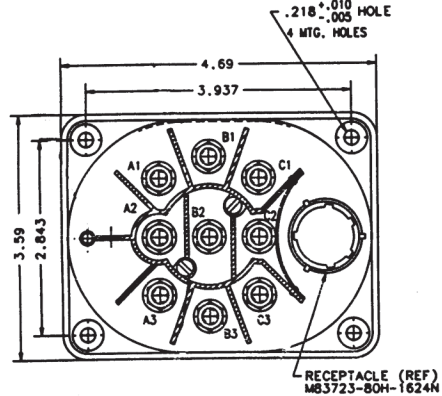

Mounting Style B

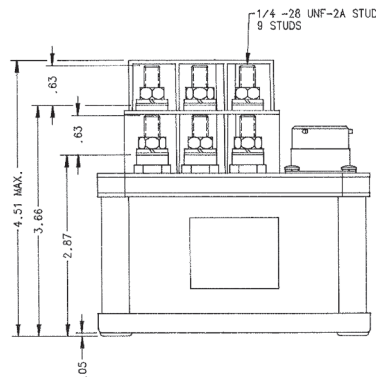


Mounting Style C


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

**D-31, DH-31, and DHL-31 Series, Rated up to 120 Amps,
115/200 VAC, 400 Hz (Continued)**


Circuit Configurations (Consult factory for other available circuit configurations)




Circuit Configuration 1




Circuit Configuration 2



Circuit Configuration 3



Circuit Configuration 4

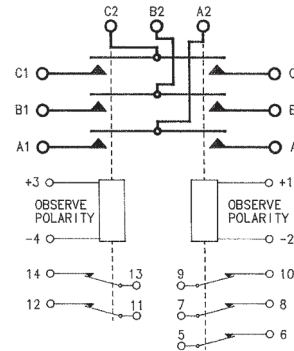

Circuit Configuration 4


HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
D-31DB	Gasket/Vented	A	B	1	1616049-2
D-31TH	Gasket/Vented	C	A	5	1616524-5
DH-31A	Hermetically Sealed	A	A	2	1616050-4
DH-31DA	Hermetically Sealed	A	B	3	1616050-5
DH-31DAA	Hermetically Sealed	A	A	3	1616050-6
DHL-31B	Hermetically Sealed	B	D	4	1616050-8

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

D-25 Series, Rated up to 125 Amps, 115/200 VAC, 400 Hz

Product Facts



- 3PDT, Side stable
- Gasket sealed

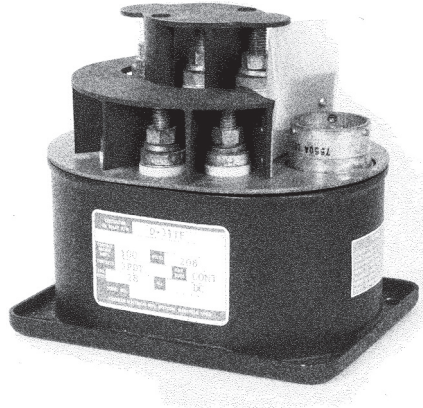

Performance Data


Electrical Characteristics

- Main Contacts —**
- Contact Arrangement —** 3PDT, Side Stable
- Rated Operating Voltage —** 115/200 VAC, 400 Hz
- Resistive Rating —** 125 Amps
- Inductive Rating —** 100 Amps
- Motor Load —** 60 Amps
- Rupture Rating —** 600 Amps
- Overload Rating —** 600 Amps
- Auxiliary Contacts —**
- Contact Arrangement —** 2PDT
- Voltage —** 28 Vdc or 115 VAC, 400 Hz
- Resistive Rating —** 3 Amps
- General Characteristics**
- Temperature Range —** -55°F to +71°F
- Altitude, Max. —** 50,000 ft
- Weight, Nominal —** 2.75 lbs
- Coil Characteristics**
- Duty Cycle —** Continuous
- Operating Voltage, Nom. —** 28 Vdc
- Pickup Voltage @ 25°C, Max. —** 18 Vdc
- Dropout Voltage @ 25°C —** 2.5 to 7 Vdc
- Coil Resistance @ 25°C —** 113 Ohms ± 20%

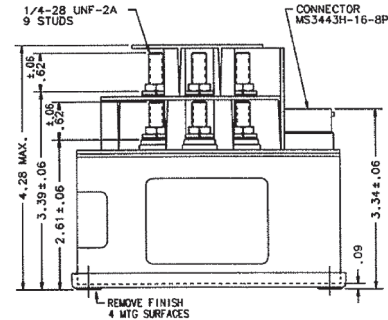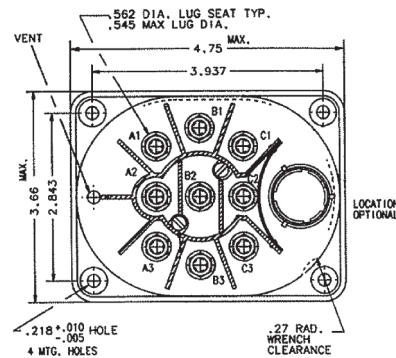

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
D-25BAH	Gasket/Vented	A	Continuous	1	1616034-2

B309 Series, Rated up to 130 Amps, 115 VDC

Product Facts

- 3PST NO, Single break main contacts
- 2PDT Auxiliary contacts (note 1)
- Gasket sealed
- Meets many requirements of MIL-PRF-6106



Performance Data

Electrical Characteristics

- Contact Arrangement** — 3PST NO, Single Break
- Rated Operating Voltage** — 115 VDC
- Resistive Current Rating** — 130 Amps (see note 2)
- Rupture Rating** — 1300 Amps (see note 3)

General Characteristics

- Temperature Range** — -55°C to +85°C
- Minimum Electrical Cycles** — 50,000
- Minimum Mechanical Cycles** — 100,000 @ 32.5 A
- Dielectric Strength** — 1500 Vrms
- Altitude** — 50,000 ft
- Weight, Max.** — 1.35 lbs
- Duty Cycle** — Continuous (Electronically Economized)
- Coil Operating Voltage** — 28 Vdc
- Drop Out Voltage** — 1.5 to 7 Vdc

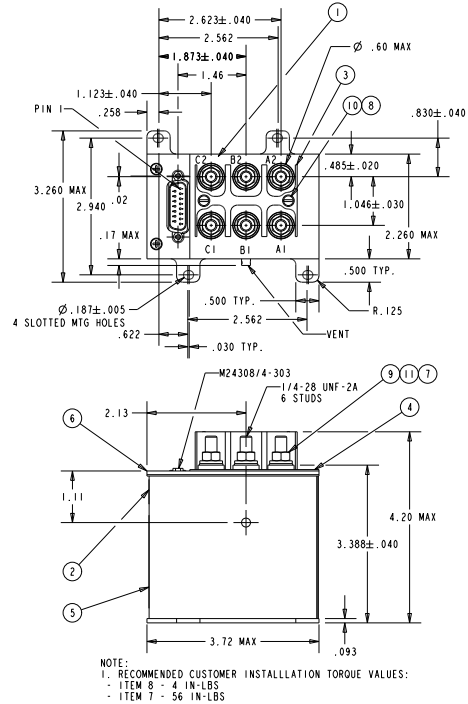

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B309A	Gasket Sealed	A	Continuous, Electronically Economized	1	1-1616975-7

NOTES


1. Other aux contact configurations available. Consult Factory.
2. Units with current ratings to 175A are available. Consult Factory.
3. Units with rupture ratings to 1750A are available. Consult Factory.

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-451 Series, Rated up to 175 Amps, 115/200 VAC, 400 Hz

Product Facts

- 3PDT, Magnetic latching
- Gasket sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106

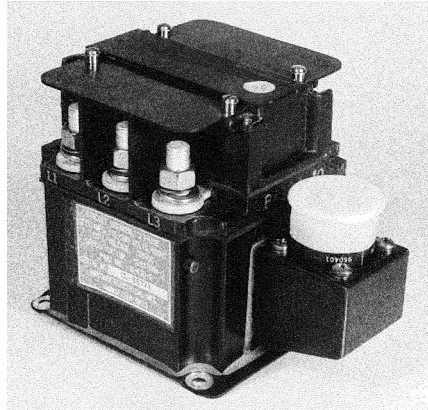

Performance Data

Electrical Characteristics

Contact Arrangement — 3PDT, Magnetic Latching

Rated Operating Voltage — 115/200 VAC, 400 Hz

Resistive Rating — 175 Amps

General Characteristics

Temperature Range — -55°C to +71°C

Operating Cycles (Life) at Rated Resistive Load, Min. — 50,000 cycles

Operating Cycles (Life) Mechanical, Min. — 100,000 cycles

Dielectric Strength — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms

Insulation Resistance, Initial — 100 megohm min.

Altitude — 50,000 ft.

Weight, Max. — 2.44 lbs



Coil Characteristics

Duty Cycle — Continuous, self-deenergizing

Operating Voltage, Max. — 30 Vdc


Close Voltage @ 15 to 30 Vdc — Resistance — 4.4 +10% Ohms
Current — 5 Amp Max.

Trip Voltage @ 15 to 30 Vdc — Resistance — 5.0 +10% Ohms
Current — 5 Amp Max.

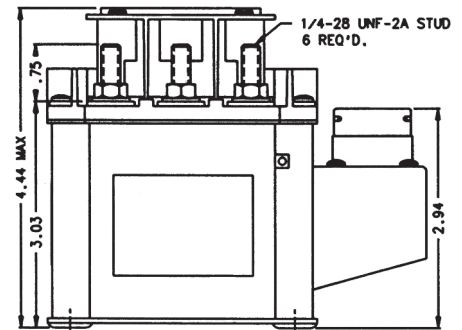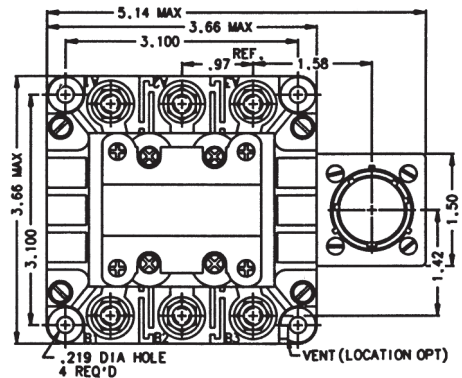

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B451	Gasket/Vented	A	Continuous, Self-Deenergizing	1	1616023-3

B-312 Series, Rated up to 175 Amps, 253/440 VAC, 50-60 Hz

Product Facts

- 3PST NO, Double break
- Gasket sealed
- 235/440 VAC, 50-60 Hz, 3 phase
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106

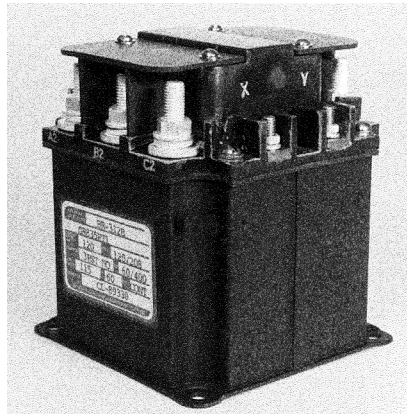

Performance Data

Electrical Characteristics

Contact Arrangement — 3PST NO, Double Break

Rated Operating Voltage — 253/440 VAC, 50-60 Hz, 3 phase

Current, Resistive — 175 Amps

Current, Inductive — B312DB — 70 Amps

Current, Motor — 150 Amps

Current, Rupture — 1,500 Amps

General Characteristics

Temperature Range — -55°C to +71°C

Operating Cycles (Life) at Rated Resistive Load, Min. — 50,000 cycles

Operating Cycles (Life) Mechanical, Min. — 100,000 cycles

Dielectric Strength — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms

Weight, Max. — 3.0 lbs

Coil Characteristics


Duty Cycle — Continuous, economizing

Operating Voltage, Nom. — 28 Vdc

Pickup Voltage — 18 Vdc


Dropout Voltage — B312DB — 1.5 to 7 Vdc
B312CH — 1 to 7 Vdc

B-312 Series, Rated up to 175 Amps, 253/440 VAC, 50-60 Hz (Continued)

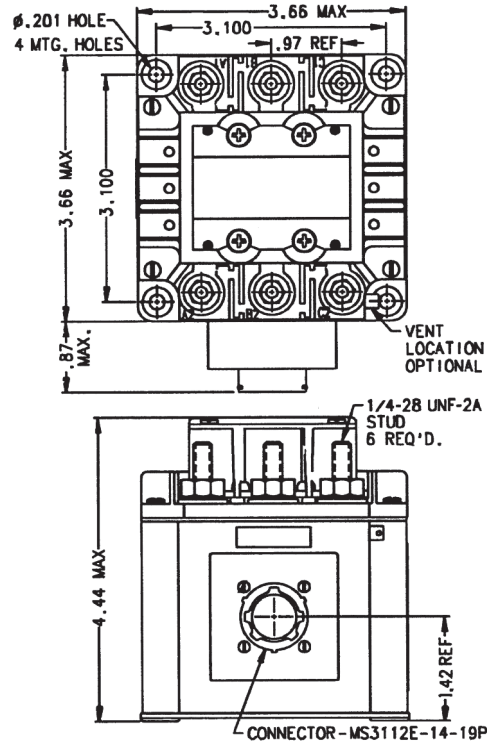

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)

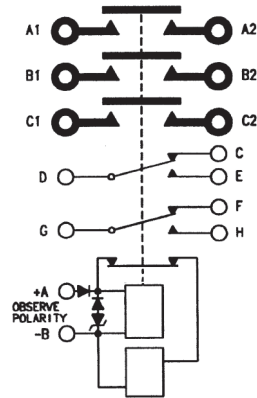

Circuit Configuration 1

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B-312DB	Gasket/Vented	A	Continuous, Economizing	1	1616004-7

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

KA175 Series, Rated up to 175 Amps, 115 or 230 VAC, 400-800 Hz

Lightweight, High Performance

Product Facts

- 3PST NO, Side stable
- Gasket sealed
- Buss bar mount



Performance Data

Electrical Characteristics

Contact Arrangement — 3PST NO, Side Stable
Rated Operating Voltage — 115/230 VAC, 230/460 VAC
 400-800 Hz
Resistive Rating — 175 Amps


General Characteristics

Temperature Range — -55°C to +85°C
Operating Cycles (Life) at Rated Resistive Load, Min. — 50,000 cycles
Operating Cycles (Life) Mechanical, Min. — 100,000 cycles
Weight, Max. — 1.25 lbs


Coil Characteristics

Duty Cycle — Continuous, economizing
Operating Voltage, Nom. — 28 Vdc
Pickup Voltage — 18 Vdc
Dropout Voltage — 1.0 to 7 Vdc

Circuit Configurations
 (Consult factory for other available circuit configurations)



Circuit Configuration 1

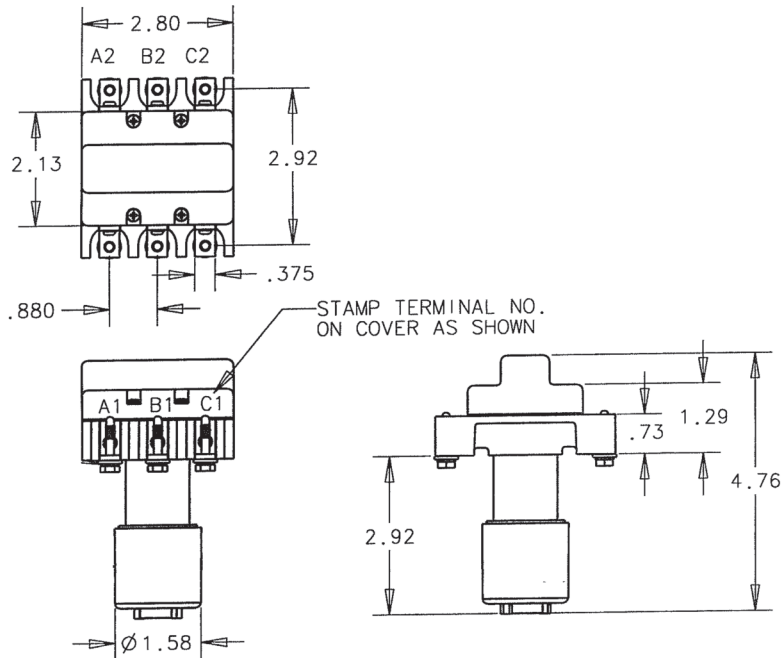

Mounting Style A

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
KA175B3C	Gasket/Vented	A	Continuous, Economizing	1	2-1616960-7

SA136F Series, Rated up to 175 Amps, 240/416 VAC

Product Facts

- 3PST NO, Side stable
- Gasket/Vented sealed



Performance Data

Electrical Characteristics



- Main Contacts** —
- Contact Arrangement** — 3PST NO, Double Break
- Rated Operating Voltage** — 240/416 VAC, 50/60/400 Hz
- Resistive Rating** — 240 Amps
- Rupture Rating** — 2400 Amps
- Auxiliary Contacts** — 1SPST NO
- Contact Arrangement** — 4PST NC
- Voltage, Nom.** — 28 Vdc
- Resistive Rating** — 5 Amps, 28 Vdc; 10 Amps, 120 VAC

General Characteristics

- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Weight, Max.** — 2.8 lbs


Coil Characteristics

- Duty Cycle** — Continuous, economizing
- Operating Voltage, Nom.** — 24 Vdc
- Pickup Voltage, Max.** — 18 Vdc
- Dropout Voltage** — 1 to 10 Vdc
- Coil Resistance** — 240A Rupture — 2400A

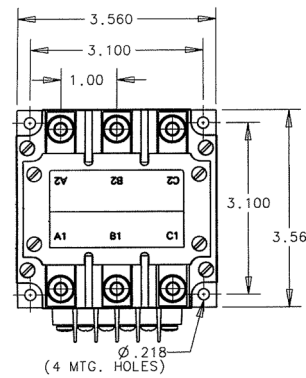

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
SA136F	Gasket/Vented	A	Continuous	1	1616948-7

B-312 Series, Rated up to 200 Amps, 115 VAC, 400 Hz

Product Facts

- 3PST NO
- Gasket sealed
- 115 VAC, 400 Hz

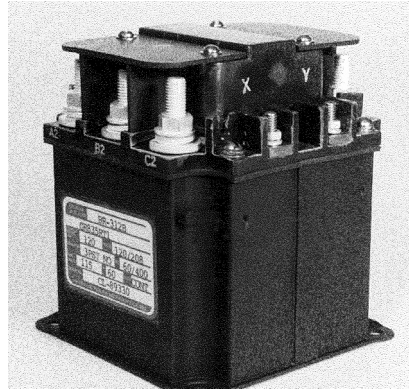

Performance Data

Electrical Characteristics



- Main Contacts —**
- Contact Arrangement —** 3PST NO, Double Break
- Rated Operating Voltage —** 115 VAC, 400 Hz
- Resistive Rating —** 200 Amps
- Inductive Rating —** 200 Amps
- Rupture Rating —** 2000 Amps
- Auxiliary Contacts —**
- Contact Arrangement —** 4PST NC
- Voltage, Nom. —** 28 Vdc or 115 VAC, 400 Hz
- Resistive Rating —** 5 Amps

General Characteristics

- Temperature Range —** -55°C to +71°C
- Operating Cycles (Life) at Rated Resistive Load, Min. —** 50,000 cycles
- Operating Cycles (Life) Mechanical, Min. —** 100,000 cycles
- Weight, Max. —** 3 lbs


Coil Characteristics

- Duty Cycle —** Continuous, economizing
- Operating Voltage, Nom. —** 28 Vdc
- Pickup Voltage, Max. —** 18 Vdc
- Dropout Voltage —** 1 to 7 Vdc
- Coil Resistance —**
- Pickup — 12 Ohms ± 20%
- Holding — 60 Ohms ± 20%

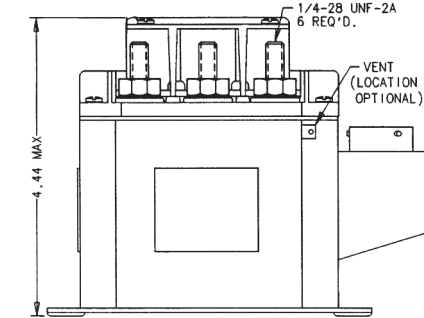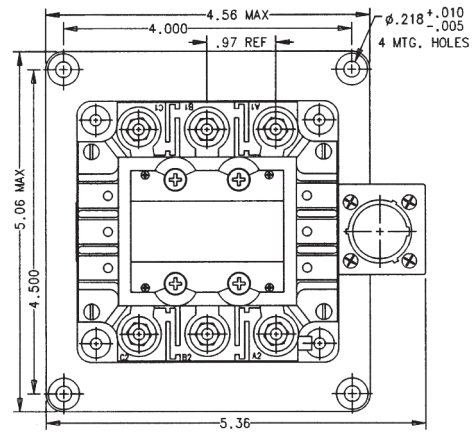

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B-312CV	Gasket/Vented	A	Continuous, Economizing	1	1616004-5

B-393 Series, Rated up to 260 Amps, 120/208 VAC, 400 Hz

Product Facts

- 3PDT, Center off, double break
- Gasket sealed

Performance Data

Electrical Characteristics


- Main Contacts** —
- Contact Arrangement** — 3PDT, Center Off, Double Break
- Rated Operating Voltage** — 120/208 VAC, 400 Hz
- Resistive Rating** — 260 Amps
- Inductive Rating** — 260 Amps
- Rupture Rating** — 2600 Amps
- Auxiliary Contacts** —
- Contact Arrangement** — 4PST NO, 2PST NC
- Resistive Rating** — 5 Amps
- Inductive Rating** — 5 Amps
- Lamp Rating** — 5 Amps

General Characteristics

- Temperature Range** — -55°C to +71°C
- Operating Cycles (Life) at Rated Resistive Load** — 50,000 cycles
- Operating Cycles (Life) Mechanical** — 100,000 cycles
- Altitude Max.** — 40,000 ft.
- Weight** — 5 lbs


Coil Characteristics

- Duty Cycle** — Continuous, economizing
- Operating Voltage, Nom.** — 28 Vdc
- Pickup Voltage, Max.** — 18 Vdc
- Dropout Voltage** —
- R-S Coil — 14 Vdc
- W-H Coil — 7 Vdc

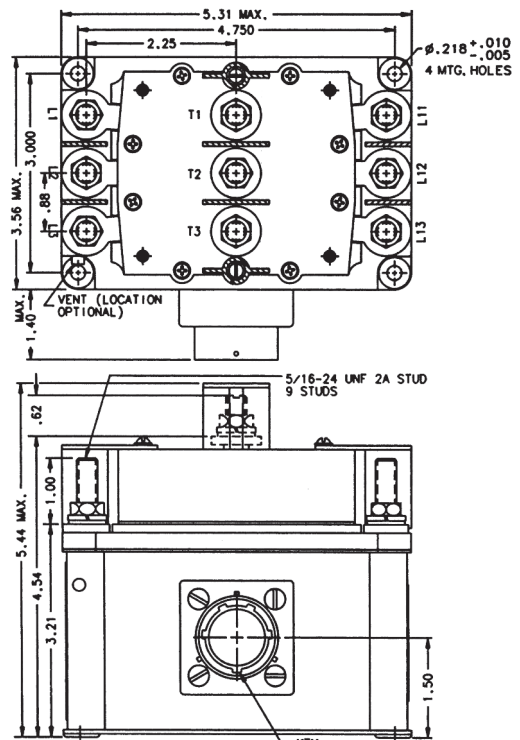

Mounting Style A

Circuit Configurations (Consult factory for other available circuit configurations)



Circuit Configuration 1


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B-393T	Gasket/Vented	A	Continuous, Economizing	1	1616044-5

B-429 Series, 260/350 Amps, 115/200 VAC or 120/208 VAC

Product Facts

- 3PST NO, Double break
- Gasket sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106

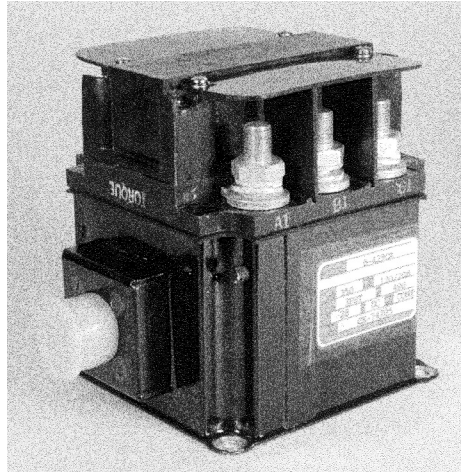

Performance Data

Electrical Characteristics

Contact Arrangement — 3PST NO, Double Break

Rated Operating Voltage —
 B-429-1 and B-429W — 115/200 VAC, 400 Hz, 3 phase
 B-429CA — 120/208 VAC

Resistive Rating —
 B-429-1 — 275 Amps
 B-429CA — 350 Amps
 B-429W — 260 Amps

General Characteristics

Temperature Range —
 -55°C to +85°C

Operating Cycles (Life) at Rated Resistive Load, Min. —
 50,000 cycles

Operating Cycles (Life) Mechanical, Min. — 100,000 cycles

Dielectric Strength —
 All Circuits to Ground — 1,500 Vrms
 Circuit to Circuit — 1,500 Vrms
 Coil to Ground and Aux. Contacts — 1,000 Vrms

Insulation Resistance, Initial —
 100 megohm min.

Altitude — 50,000 ft.

Weight, Max. — 4.0 lbs

Coil Characteristics

Duty Cycle — Continuous, economized with suppression (Type A or B, See diagram below)

Operating Voltage, Nom. — 28 Vdc


Pickup Voltage, Max. —
 Coil Type A — 15 Vdc
 Coil Type B — 18 Vdc

Dropout Voltage, Max. —
 Coil Type A — 1.5 to 10 Vdc
 Coil Type B — 1 to 7 Vdc


Coil Current Inrush —
 Coil Type A — 6 Amps
 Coil Type B — 2.7 Amps

Coil Current Holding —
 Coil Type A — 0.6 Amps
 Coil Type B — 0.56 Amps

Coil Type







A — Continuous, Economized with Suppression



B — Continuous, Economized with Suppression


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-429 Series, 260/350 Amps, 115/200 VAC or 120/208 VAC (Continued)

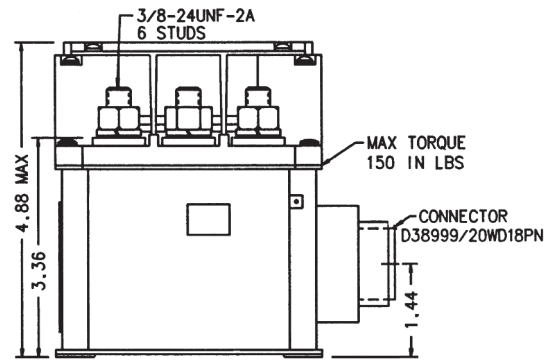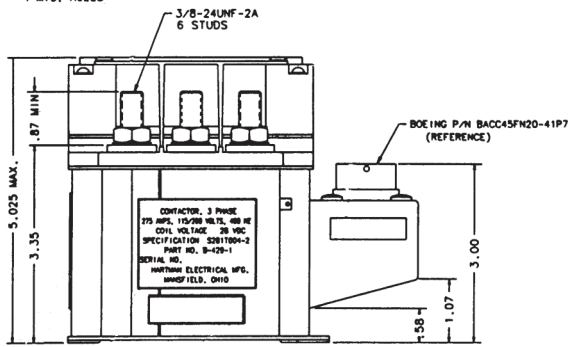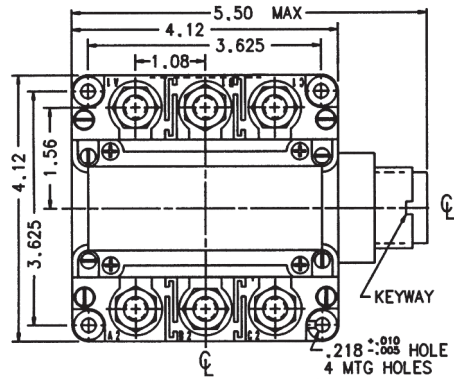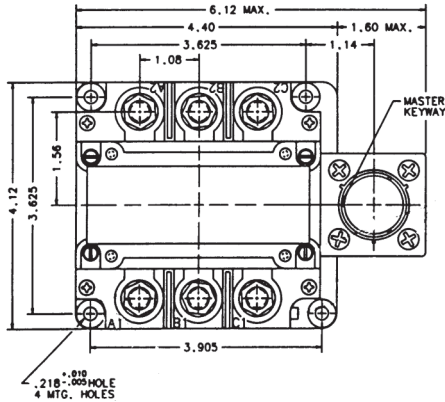

Mounting Style A

Mounting Style B

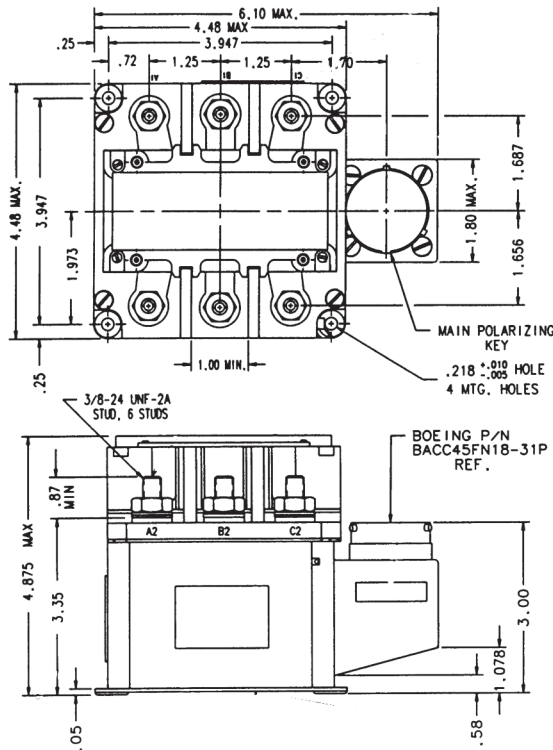


Mounting Style C


For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-429 Series, 260/350 Amps, 115/200 VAC or 120/208 VAC (Continued)


Circuit Configurations (Consult factory for other available circuit configurations)

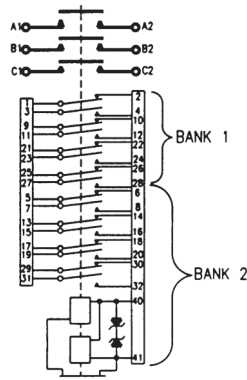

Circuit Configuration 1



Circuit Configuration 2

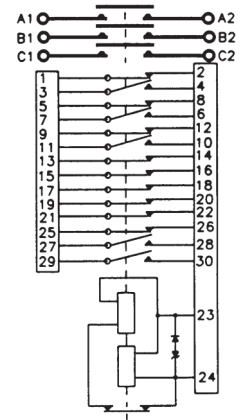

Circuit Configuration 3


HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B-429W	Gasket/Vented	B	B	3	1616005-6
B-429-1	Gasket/Vented	A	A	1	1616005-1
B-429CA	Gasket/Vented	A	B	2	1616005-4

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-430 Series, Rated up to 275 Amps, 115/200 VAC, 400 Hz

Product Facts

- 3PST, Double break, magnetic latching
- Gasket sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106

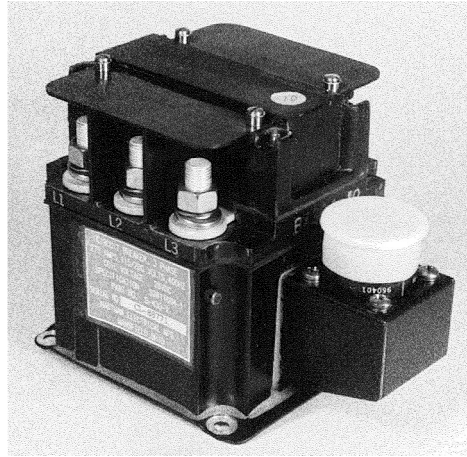

Performance Data

Electrical Characteristics

Contact Arrangement — 3PST, Double Break, Magnetic Latching
Rated Operating Voltage — 115/200 VAC, 400 Hz, 3 phase
Resistive Rating — 275 Amps
Interrupt Rating — 2,000 Amps


General Characteristics

Temperature Range — -55°C to +85°C
Operating Cycles (Life) at Rated Resistive Load, Min. — 50,000 cycles
Operating Cycles (Life) Mechanical, Min. — 100,000 cycles
Dielectric Strength — All Circuits to Ground — 1,500 Vrms
 Circuit to Circuit — 1,500 Vrms
 Coil to Ground and Aux. Contacts — 1,000 Vrms
Insulation Resistance, Initial — 100 megohm min.
Altitude — 45,000 ft.
Weight, Max. — 4.0 lbs


Coil Characteristics

Duty Cycle — B-430-1 — Continuous, self-deenergizing (Type A, See diagram below)
 B-430Z — Continuous, self-deenergizing with suppression (Type B, See diagram below)
Operating Voltage Close, @ 85°C — Min. — 15 Vdc
 Max. — B-430-1 — 28 Vdc
 B-430Z — 29 Vdc
Operating Voltage Trip, @ 85°C — Min. — 15 Vdc
 Max. — B-430-1 — 28 Vdc
 B-430Z — 29 Vdc
Coil Current Closing, Max. — 6 Amps
Coil Current Trip, Max. — 6 Amps

Coil Type




A — Continuous, Self-Deenergizing




B — Continuous, Self-Deenergizing with Suppression

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-430 Series, Rated up to 275 Amps, 115/200 VAC, 400 Hz (Continued)

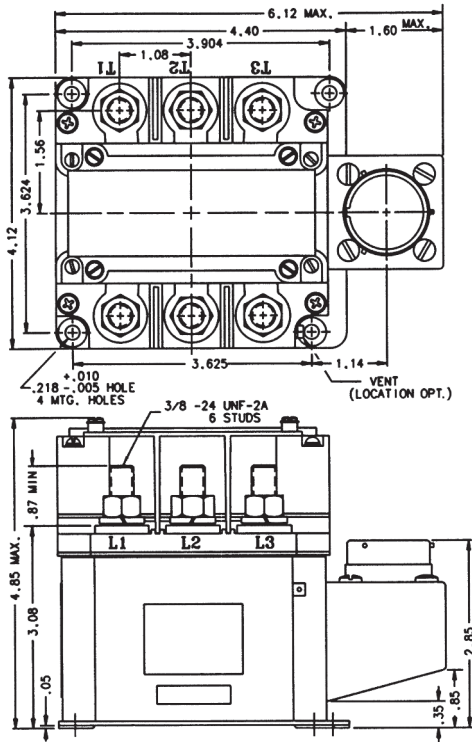


Mounting Style A

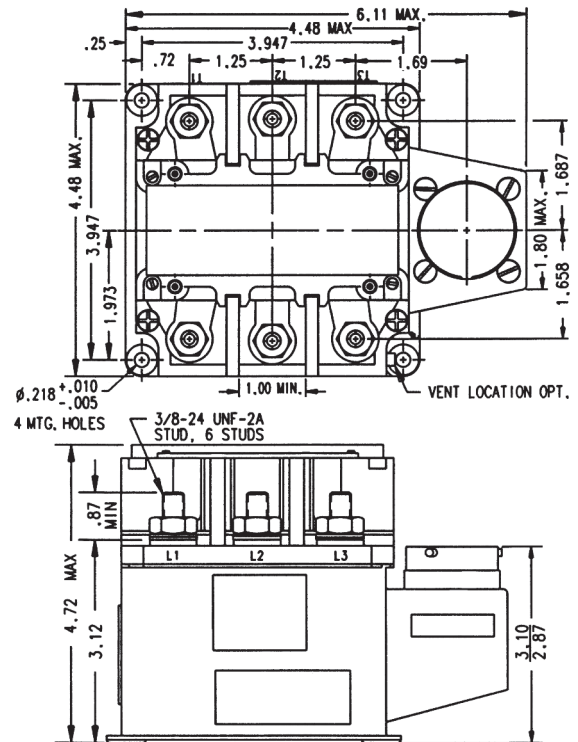


Mounting Style B

Circuit Configurations (Consult factory for other available circuit configurations)

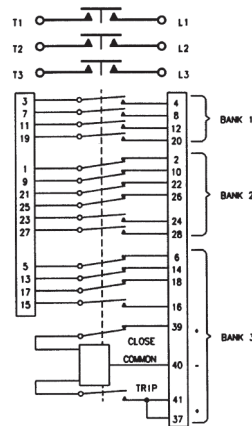

Circuit Configuration 1

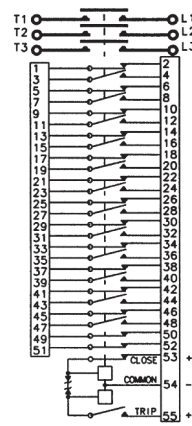

Circuit Configuration 2


HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B-430-1	Gasket/Vented	A	A	1	1616023-1
B-430Z	Gasket/Vented	B	B	2	1616023-2

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-484 Series, Rated up to 500 Amps, 115/200 VAC, 400 Hz

Product Facts

- 3PDT, Magnetic latching
- Gasket sealed
- Auxiliary contacts available
- Meets many requirements of MIL-PRF-6106

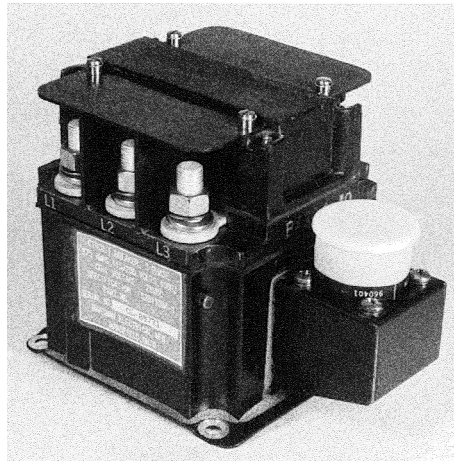

Performance Data

Electrical Characteristics

- Contact Arrangement** — 3PDT, Magnetic Latching
- Rated Operating Voltage** — 115/200 VAC, 400 Hz, 3 phase
- Resistive Rating, Continuous** — 500 Amps
- Inductive Rating** — 500 Amps
- Interrupt Rating** — 6,500 Amps

General Characteristics



- Temperature Range** — -54°C to +71°C
- Operating Cycles (Life) at Rated Resistive Load, Min.** — 50,000 cycles
- Operating Cycles (Life) Mechanical, Min.** — 100,000 cycles
- Dielectric Strength** — All Circuits to Ground — 1,500 Vrms
Circuit to Circuit — 1,500 Vrms
Coil to Ground and Aux. Contacts — 1,000 Vrms
- Insulation Resistance, Initial** — 100 megohm min.
- Altitude** — 45,000 ft.
- Weight, Max.** — 4.5 lbs

Coil Characteristics


- Duty Cycle** — Continuous, self-deenergizing
- Close Voltage** — Min. — 15 Vdc
Max. — 29 Vdc
- Trip Voltage** — Min. — 15 Vdc
Max. — 29 Vdc

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

B-484 Series, Rated up to 500 Amps, 115/200 VAC, 400 Hz (Continued)

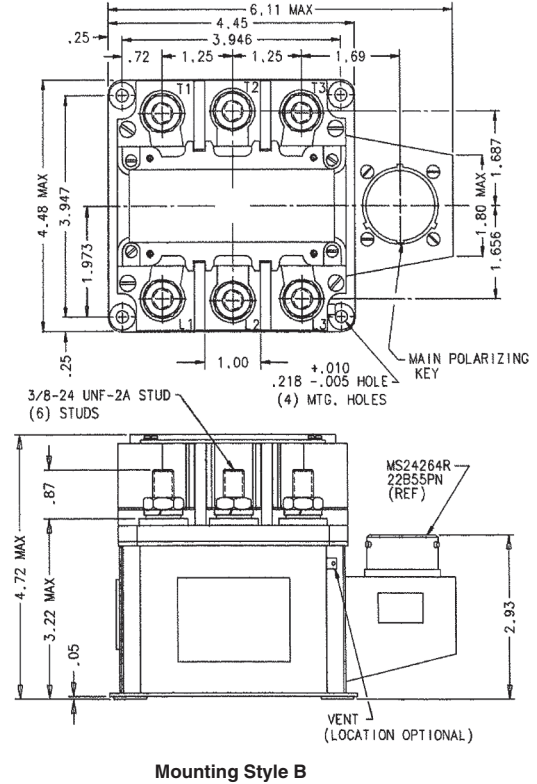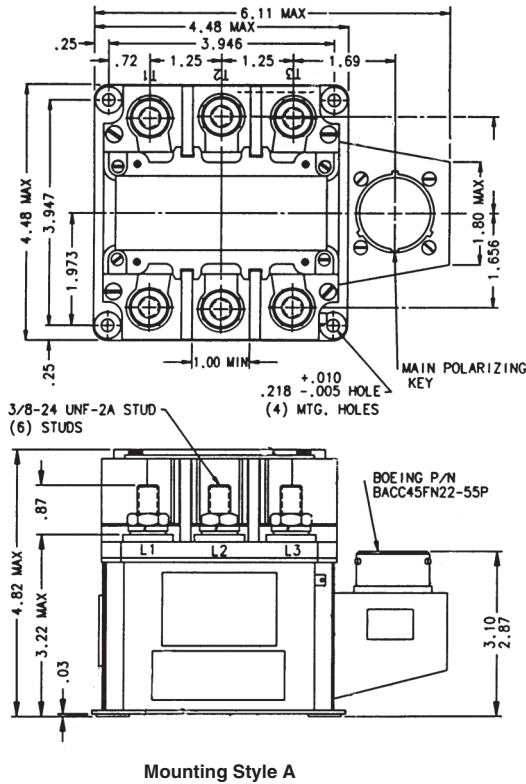

Circuit Configurations (Consult factory for other available circuit configurations)

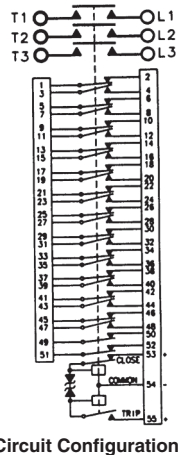

HARTMAN Part Number	Construction Type	Mounting Style	Coil Type	Circuit Config.	TE Part Number
B-484	Gasket/Vented	A	Continuous, Self-Deenergizing	1	1616023-4
B-484C	Gasket/Vented	B	Continuous, Self-Deenergizing	1	1616023-5

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

Cross Reference

Main Current Rating	AC/DC	Rating	Main Contact Config.	Operating Mode	Aux. Contact Config.	Coil Voltage (VDC)	Seal Type	Duty Cycle	Coil Trans. Voltage	Hartman Part No.	TE Part No.		
25	AC	115	3PDT	Side Stable	–	28	Hermetic	Cont.	–	DH-14B	1-1616522-4		
		115	3PDT	Side Stable	–	115V	Hermetic	Cont.	–	DHR-14B	1-1616037-2		
		115/200	3PDT	Side Stable	–	28-31	Hermetic	Cont.	42	DH-14B-3	1616037-1		
		115/200	3PDT	Side Stable	–	115V	Hermetic	Cont.	–	DHR-14BA	1-1616037-3		
		115/200	3PST NO	Side Stable	–	28	Hermetic	Cont.	42	DH-14CE	1616017-1		
30	AC	115	3PDT	Center Off	–	115V	Hermetic	Cont.	–	DHR-18-1	1616050-9		
		115	DPDT	Side Stable	–	115V	Hermetic	Cont.	–	DHR-7K	1616522-2		
		115	3PDT	Side Stable	SPST NO	28	Hermetic	Cont.	–	DH-7BB	1616037-7		
		115/200	3PDT	Side Stable	DPDT	18-32	Hermetic	Cont.	50	DH-7ZAB	1-1616037-1		
		120/208	3PDT	Side Stable	–	115V	Hermetic	Cont.	–	DHR-7B	1-1616037-6		
		120/208	3PDT	Side Stable	–	115V	Hermetic	Cont.	–	DHR-7BE	1-1616037-7		
		115	3PST	Center Off	–	28	Gasket/Vented	Cont.	20	D-18F	1616048-4		
		50	AC	115/200	3PDT	Center Off	–	28	Gasket/Vented	Cont.	–	D-18	1616048-1
				115/200	3PDT	Center Off	SPST NO Each Side	28	Gasket/Vented	Cont.	–	D-180A	1616048-2
				115/200	3PDT	Center Off	–	28	Gasket/Vented	Cont.	45	D-18AA	1616048-3
				115/200	3PDT	Center Off	6PDT	28	Gasket/Vented	Cont.	45	D-18ZZC	1-1616957-3
115	3PDT			Center Off	–	28	Hermetic	Cont.	–	DH-18	1616050-1		
115/200	3PDT			Center Off	–	28-30	Hermetic	Cont.	–	DH-18Y	1616524-3		
115	SPDT			Center Off	–	35	Gasket/Vented	Cont.	–	DR-18E-5	1616099-1		
115/200	3PST			Side Stable	–	28	Gasket/Vented	Cont.	50	D-7M	1616016-2		
115/230	SPST			Side Stable	–	28	Gasket/Vented	Cont.	–	D7MA	1616016-3		
115/200	3PST NC			Side Stable	SPDT	28	Gasket/Vented	Cont.	45	D-7MM	1616016-4		
115/200	3PST NO			Side Stable	SPST NO SPST NC	115	Gasket/Vented	Cont.	–	DR-7VC	1616018-1		
115	3PST NO			Side Stable	SPST NO	28	Hermetic	Cont.	–	DH-7N	1616017-9		
115	3PST NO			Side Stable	SPST NO(2) SPST NC	28	Hermetic	Cont.	50	DH-7ZG-1	1-1616017-0		
115	3PST NO			Side Stable	–	120V	Hermetic	Cont.	–	DHR-7M	1616518-2		
50	AC			115	3PST NO	Side Stable	DPST NC SPST NO	115V	Hermetic	Cont.	–	DHR-7ZG	1-1616017-2
				115/200	3PDT	Side Stable	SPDT	28-30	Hermetic	Cont.	50	DH-7GR	1616037-9
				115/200	3PDT	Side Stable	SPDT	28	Gasket/Vented	Cont.	45	D-7GRZ	1616036-5
		115/208	3PDT	Side Stable	–	18-30	Gasket/Vented	Cont.	–	D-7BS	1616036-1		
		115/208	3PDT	Side Stable	SPDT	28	Gasket/Vented	Cont.	–	D-7GR	1616036-2		
		115/208	SPDT	Side Stable	SPDT	28	Gasket/Vented	Cont.	–	D-7GR-2	1616036-3		
		115/208	3PDT	Side Stable	SPDT	28	Gasket/Vented	Cont.	45	D-7GR-3	1616036-4		
		115	3PDT	Side Stable	SPST NC	18-30	Hermetic	Cont.	–	DH-7BC	1616037-8		
		115	3PST NO	Side Stable	–	28	Hermetic	Cont.	–	BH-316	1616008-4		
		115	3PST NO	Side Stable	1NO, 1NC	28	Hermetic	Cont.	–	BH-316A	1616008-5		
		115	3PST NO	Side Stable	–	28	Hermetic	Cont.	45	BH-316C	1-1616520-0		
60	AC	115/200	TPST NO	Side Stable	–	28	Hermetic	Cont.	–	BH-316D	1616008-6		
		200	3PDT	Side Stable	SPDT	28	Gasket/Vented	Cont.	–	B-138BH	1616028-1		
		200	3PDT	Side Stable	DPDT	28	Gasket/Vented	Cont.	–	B-138XAH	1616028-2		
		115/200	3PDT	Side Stable	DPDT	28	Gasket/Vented	Cont.	42	B-138XEH	1616028-3		
		200	3PDT	Center Off	SPST NO	28	Gasket/Vented	Cont.	–	B-140V	1-1616043-0		
		115/200	3PDT NO	Center Off	DPST NC	28	Gasket/Vented	Cont.	–	B-140BH	1616043-9		
		120/208	3PDT NO	Center Off	6PDT	28	Gasket/Vented	Cont.	75	B-140AP-1	1616043-7		
		115/200	3PST NO	Side Stable	4PDT	28	Gasket/Vented	Cont.	45	B-138S	1616002-5		

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

Cross Reference (Continued)

Main Current Rating	AC/DC	Rating	Main Contact Config.	Operating Mode	Aux. Contact Config.	Coil Voltage (VDC)	Seal Type	Duty Cycle	Coil Trans. Voltage	Hartman Part No.	TE Part No.		
100	AC	115/200	3PDT	Side Stable	SPST NC	28	Gasket/Vented	Cont.	–	D-25BD	1616034-3		
		115/200	3PDT	Side Stable	–	28	Hermetic	Cont.	–	DH-25B	1616037-2		
		115/200	3PDT NC	Side Stable	DPDT	28	Hermetic	Cont.	–	DH-25BA	1616037-3		
		115/200	3PDT	Side Stable	–	115	Hermetic	Cont.	–	DHR-25BG	1-1616037-5		
		115/200	3PDT	Center Off	–	28	Gasket/Vented	Cont.	–	D-31C	1616049-1		
120	AC	115/200	3PDT	Center Off	5PST NC	28	Gasket/Vented	Cont.	–	D-31TH	1616524-5		
		115/208	3PDT	Center Off	6PDT	28	Gasket/Vented	Cont.	42	D-31DB	1616049-2		
		115/208	3PDT	Center Off	4PDT	18-30	Hermetic	Cont.	42	DH-31DAA	1616050-6		
		115/200	3PDT	Center Off	6PDT	28	Hermetic	Cont.	–	DH-31A	1616050-4		
		115/208	3PDT	Center Off	4PDT	18-30	Hermetic	Cont.	42	DH-31DA	1616050-5		
		115/200	3PDT	Center Off Latching	6PDT	18-30	Hermetic	Cont.	50	DHL-31B	1616050-8		
		115/200	3PST NO	Side Stable	(1)SPST NC (1) SPDT	28	Gasket/Vented	Cont.	–	D-25CF	1616015-1		
		115/200	3PST NO	Side Stable	(1)SPST NO (1) SPST NC	28	Hermetic	Cont.	42	DH-25CU	1616017-4		
		125	AC	115/200	3PDT	Side Stable	DPDT	28	Gasket/Vented	Cont.	45	D-25BAH	1616034-2
		130	AC	115/200	3PST NO	–	3PST NO	28	Gasket	Cont.Econ	–	B309A	1-1616975-7
175	AC	115/200	3PST	Mag Latching	6PDT	15-30	Gasket/Vented	Cont.	42	B-451	1616023-3		
175	AC	253/440	3PST NO	–	DPDT	28	Gasket/Vented	Cont.Econ.	45	B-312DB	1616004-7		
		115	3PST NO	Side Stable	2PDT	28	Gasket/Vented	Cont. Econ.	–	SA-136F	1616948-7		
		115/200	3ST NO	Side Stable	2DT	28	Gasket	Cont. Econ.	42	KA175B3C	2-1616960-7		
200	AC	115	3PST NO	–	4PST NC	28	Gasket/Vented	Cont. Econ.	45	B-312CV	1616004-5		
260	AC	120/208	3PDT	Center Off	4PST NO 2PST NC	28	Gasket/Vented	Cont. Econ.	45	B-393T	1616044-5		
		115/200	3PST NO	Side Stable	(5)SPST NO (9) SPST NC	28	Gasket/Vented	Cont. Econ.	45	B-429W	1616005-6		
275	AC	115/200	3PST	Mag Latching	(7)SPST NO (7)2PST NC	28	Gasket/Vented	Cont. Econ.	45	B-430-1	1616023-1		
		115/200	3PST	Mag Latching	(12)SPST NO (14) SPST NC	28	Gasket/Vented	Cont. Econ.	45	B-430Z	1616023-2		
275	AC	115/200	3PST NO	Side Stable	(8)SPST NO	28	Gasket/Vented	Cont. Econ	45	B-429-1	1616005-1		
350	AC	120/208	3PST NO	Side Stable	4SPDT	28	Gasket/Vented	Cont.	45	B-429CA	1616005-4		
500	AC	115/200	3PST	Mag Latching	(12)SPST NO (14)2PST NC	15-29	Gasket/Vented	Cont.	45	B-484	1616023-4		
		115/200	3PST	Mag Latching	(12)SPST NO (14) SPST NC	15-29	Gasket/Vented	Cont.	45	B-484C	1616023-5		

For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.