



# INSTALITE Molded Boots with Rayaten Shielding

Rugged, Reliable and EMI Enhanced Molded Parts  
for Sealed Harness Applications

# INSTALITE Molded Boots with Rayaten Shielding

Rugged, Reliable And EMI Enhanced Molded Parts



## VERSATILE

- Fits most circular connectors and backshells
- Approximately 2:1 shrink ratio
- Straight, right-angled, and transitional shapes available
- D Subminiature options for rectangular connector backshells

## RUGGED

- Abrasion resistant
- Resists most common military fuels, oils, and greases

## ENHANCED EMI PERFORMANCE

- 70 dB of attenuation up to 1 Ghz
- EMI continuity from harness braid through the backshell

## LIGHTWEIGHT

- Improved coating
- Coatings can be custom designed

## Description

TE Connectivity (TE) now offers the Rayaten family of high performance, rugged, versatile, heat-shrinkable molded parts, that offer lightweight screening capability of 70 db of attenuation up to 1 Ghz. When looking for high reliability, excellent strain relief and enhanced EMI performance, in a small, rugged, environmentally sealed product, you can count on the Rayaten family of molded parts. Rayaten molded parts are available in standard -25 (System 25) compound, and -100 (System 100) Zero Halogen, low fire hazard compound.

This next generation Rayaten product provides the same level of shielding and performance as the original Rayaten series, with improved installation properties, making it easier to use.

## Customization

For less (or more) demanding EMI applications, TE can customize the EMI shielding level of the product to meet specific customer requirements. Please contact your TE sales representative to discuss such requirements.

## End to End Solutions

Rayaten product family is part of our wide portfolio of INSTALITE heat-shrinkable molded shapes, lightweight braids, and compatible adhesives, backshells, terminations and heat-shrinkable tubings. These products allow us to bring both expertise and knowledge in end-to-end sealed harnessing solutions for the Aerospace, Defense & Marine Markets.

## APPLICATIONS

- Military Ground Vehicles
- Missile and Missile Launchers
- Naval Shipboard
- Flight Control Systems
- Radar Systems
- C4ISR Systems

## TE Components . . . TE Technology . . . TE Know-how . . .

AMP | AGASTAT | CII | HARTMAN | KILOVAC | MICRODOT | NANONICS | POLAMCO | Raychem  
SEACON | Rochester | DEUTSCH


Empower Engineers to Solve Problems, Moving the World Forward.



## Screening Effectiveness

Ultraconductive coating material tested on 202S152 molded parts

Terminated using S1184 adhesive

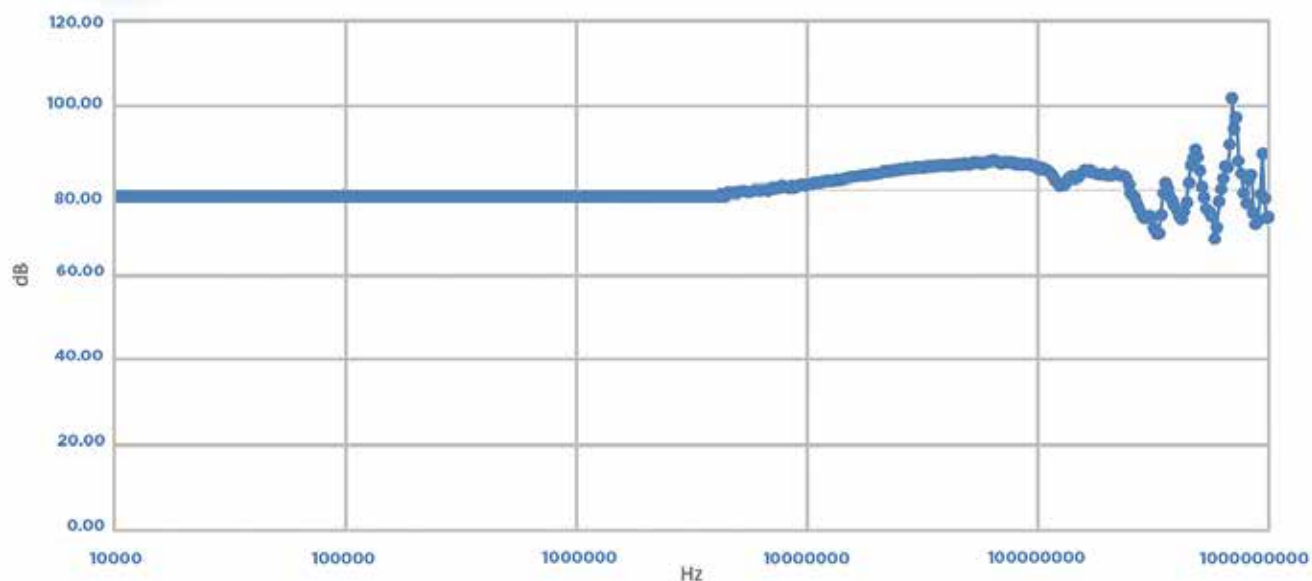

Cross Sectional Area

## PERFORMANCE CHARACTERISTICS

### Product Specification

RW-3046 (-100C)

RW-3047 (-25C)

### ELECTRICAL

#### Screening performance:

Boots: 3kHz-30 MHz 75 dB min >30 MHz-100 MHz

70 dB min: Transitions 3 kHz-100 MHz 65 dB min

Physical Properties (including thermal, mechanical and environmental testing)

Meets performance requirements of System 25 and System 100. See product specifications.

### CONTINUOUS OPERATING TEMPERATURE

-75°C to +150°C (System 25)

-30°C to +105°C (System 100)

## INSTALLATION INSTRUCTIONS

**ELE-3COP-505:** Installation of Coated Straight, 90° and 45° Molded Parts

**ELE-3COP-508:** Installation of Coated Molded Parts onto D-Subminiature Connectors

**ELE-3COP-573:** Installation of Coated Transition Molded Parts

## LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. Just call your local support number or visit [te.com](http://te.com) to chat with a Product Information Specialist.

## Technical Support

[te.com/support-center](http://te.com/support-center)

|                      |                 |              |                    |
|----------------------|-----------------|--------------|--------------------|
| North America        | +1 800 522 6752 | Asia Pacific | +86 400 820 6015   |
| North America (Toll) | +1 717 986 7777 | Japan        | +81 044 844 8180   |
| EMEA/South Africa    | +800 0440 5100  | Australia    | +61 2 9554 2695    |
| EMEA (Toll)          | +31 73 624 6999 | New Zealand  | +64 (0) 9 634 4580 |
| India (Toll-Free)    | +800 440 5100   |              |                    |

[te.com/rayaten](http://te.com/rayaten)

INSTALITE, Rayaten, AMP, AGASTAT, CII, DEUTSCH, HARTMAN, KILOVAC, MICRODOT, NANONICS, POLAMCO, Raychem, SEACON, TE, TE Connectivity and the TE connectivity (logo) are trademarks of TE Connectivity. Other products, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information herein, nothing herein constitutes any guarantee that such information is error-free, or any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. The TE entity issuing this publication reserves the right to make any adjustments to the information contained herein at any time without notice. All implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose are expressly disclaimed. The dimensions herein are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice.

Consult TE for the latest dimensions and design specifications.

© 2018 TE Connectivity All Rights Reserved.

1-1773953-5 05/18