



NEW PRODUCT BRIEF

Bourns® Model BID Series Insulated Gate Bipolar Transistors (IGBTs)

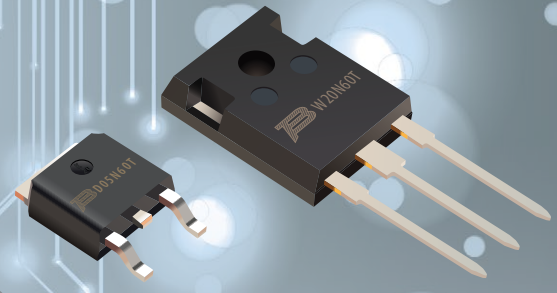

INTRODUCTION

The [Bourns® Model BID Series](#) discrete insulated gate bipolar transistor (IGBT) products combine technology from a MOSFET gate and a bipolar transistor, resulting in an optimum solution for high voltage and high current applications. These devices use Trench-Gate Field-Stop (TGFS) technology providing excellent control of dynamic characteristics while resulting in a lower collector-emitter saturation voltage ($V_{CE(sat)}$) and lower switching losses. In addition, the devices provide a lower thermal resistance ($R_{th(j-c)}$) due to the thermally efficient TO-252, TO-247 and TO-247N packages. These cost-effective, industry-leading products are also RoHS compliant.

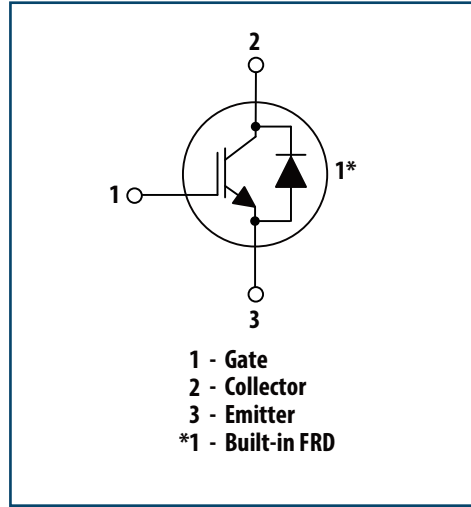

APPLICATIONS

Bourns® BID Series is designed to address the power management needs of several high-volume, high-growth applications including home appliances, industrial motor drives, and welding.

Through advanced trench-gate-field-stop technology that enables low conduction and switching losses, these Bourns® IGBTs address the growing need for cost-effective power efficiency.

FEATURES

- Discrete IGBT co-packed with Fast Recovery Diode (FRD)
- Advanced Trench-Gate Field-Stop (TGFS) technology
- Low saturation voltage drop ($V_{CE(sat)}$)
- Low switching loss
- TO-252, TO-247 and TO-247N packages
- Qualified according to JEDEC standard for power switching products
- RoHS compliant*

MARKET TRENDS

The discrete IGBT market eclipsed \$1.3 billion in sales in 2020 and is expected to exceed \$1.6 billion by 2026. (Reference: Yole Development 2021), driven by strong growth in home appliances, welding, industrial motor drives, and automotive applications.

Together, discrete IGBT devices and IGBT modules are projected to achieve a worldwide compound annual growth rate (CAGR) of 7.5 % from 2020 to 2026 (Reference: Yole Development 2021) despite the concurrent proliferation of SiC-MOSFETs and GaN solutions. In general, medium- and high-voltage applications use IGBT modules, while consumer and other low-voltage applications prefer discrete components.

HOW TO ORDER

B I D W 50 N 65 T

B = Bourns
I = IGBT
Type
D = Discreet
Package Code
W = TO-247-3L
Current Rating
50 - 50 A
Device Type
N = N-Channel
Nominal Voltage (divided by 10)
65 = 650 V
Optimization
T = Medium Speed

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

NEW PRODUCT BRIEF



Bourns® Model BID Series Insulated Gate Bipolar Transistors (IGBTs)



TO-252 SMD IGBT ($T_C = 25^\circ\text{C}$, Unless Otherwise Specified)

Model Number	Photo	Package	Type	V_{CES} (V)	I_C @ $T=100^\circ\text{C}$ (A)	Typ. $V_{CE(sat)}$ @ $I_C, V_{GE}=15\text{ V}$ (V)	I_F @ $T_C=100^\circ\text{C}$ (A)	Operating Junction Temperature
BIDD05N60T		TO-252	Medium Speed	600	5	1.5	–	-55°C to $+150^\circ\text{C}$

TO-247 DIP IGBT ($T_C = 25^\circ\text{C}$, Unless Otherwise Specified)

Model Number	Photo	Package	Type	V_{CES} (V)	I_C @ $T=100^\circ\text{C}$ (A)	Typ. $V_{CE(sat)}$ @ $I_C, V_{GE}=15\text{ V}$ (V)	I_F @ $T_C=100^\circ\text{C}$ (A)	Operating Junction Temperature
BIDW20N60T		TO-247	Medium Speed	600	20	1.7	20	-55°C to $+150^\circ\text{C}$
BIDW30N60T		TO-247	Medium Speed	600	30	1.65	30	-55°C to $+150^\circ\text{C}$
BIDW50N65T		TO-247	Medium Speed	650	50	1.65	50	-55°C to $+150^\circ\text{C}$
BIDNW30N60H3		TO-247N	High Speed	600	30	1.65	12	-55°C to $+150^\circ\text{C}$

IGBT Product Portfolio

V_{CES}, I_C (V) / (A)	TO-252	TO-247	TO-247N
600 V, 5 A	BIDD05N60T	–	–
600 V, 20 A	–	BIDW20N60T	–
600 V, 30 A	–	BIDW30N60T	BIDNW30N60H3
650 V, 50 A	–	BIDW50N65T	–

www.bourns.com

Americas: Tel +1-951 781-5500
Email americus@bourns.com

EMEA: Tel +36 88 885 877
Email eurocus@bourns.com



Asia-Pacific: Tel +886-2 256 241 17
Email asiacus@bourns.com

COPYRIGHT © 2022 • BOURNS, INC. • 08/22 • e/ESD2242
"Bourns" is a registered trademark of Bourns, Inc. in the U.S. and other countries.