


MISSION-CRITICAL  
INTERCONNECT  
SOLUTIONS

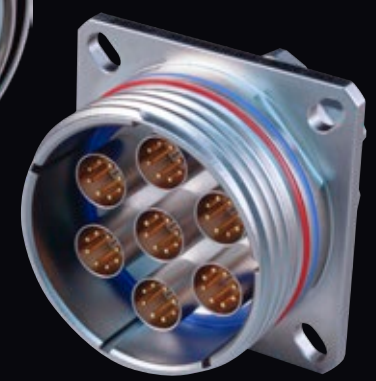

*Glennair*  
SIGNATURE SERIES


# High-Speed Interconnect Solutions

Rugged Electrical, Optical, and Hybrid Solutions for  
Mission-Critical Aerospace and Defense Applications

# Rugged High-Speed Interconnect Solutions

Electrical, Optical, and Hybrid Solutions for Mission-Critical Aerospace and Defense Applications

## EL OCHITO® HIGH-SPEED OCTAXIAL CONTACTS AND CONNECTOR PACKAGING

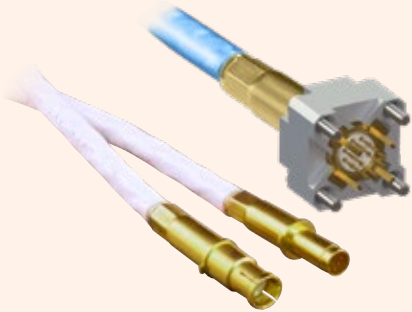

El Ochito® high-speed octaxial contacts



SuperFly nano miniature with El Ochito®



Series 792 micro miniature with El Ochito®



Series 806 Mil-Aero micro miniature with El Ochito®

## EL OCHITO® PACKAGING (continued)



Series 23 SuperNine® with El Ochito®

## SIGNATURE HIGH-SPEED CONNECTOR SOLUTIONS



Series 23 SuperNine® with SpeedMaster™ 10G high-speed contacts




Octobyte™ industrial-strength Ethernet connectors

## SIGNATURE HIGH-SPEED CONNECTOR SOLUTIONS (continued)



SuperSeal™ RJ45 Ethernet and USB ruggedized field connectors



Micro-D form-factor connector with VersaLink™ differential Twinax *plus* VersaLink™ Bridge



High-Speed Micro-D high-density SWaP solution

**GLENAIR SIGNATURE BUTT-JOINT FIBER OPTIC INTERCONNECT SOLUTIONS**



Rugged MIL-DTL-38999 type fiber optic



Glenair High Density (GHD) rugged fiber optic



Glenair Front Release (GFR) rugged fiber optic

**SIGNATURE FIBER OPTIC SOLUTIONS (continued)**



Rugged MT Ferrule solutions for 38999 and Series 791

**RUGGED HIGH-SPEED ELECTRICAL-OPTICAL MEDIA CONVERTERS**




Copper-to-fiber media converters for video applications



Copper-to-fiber media converters for Ethernet applications


**RUGGED PCB-MOUNT TRANSCEIVERS FOR ETHERNET, HIGH-SPEED VIDEO, AND STORAGE**




EMI shielded and radiation-tolerant transceivers



Dual transceivers, quad transmitters, quad receivers




Bi-directional transceivers

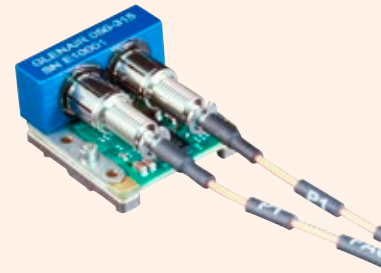

Small form-factor, high-vibration, high-temperature tolerant


**RF-OVER FIBER AND HIGH-DATARATE PARALLEL OPTICAL TRANSCEIVERS**

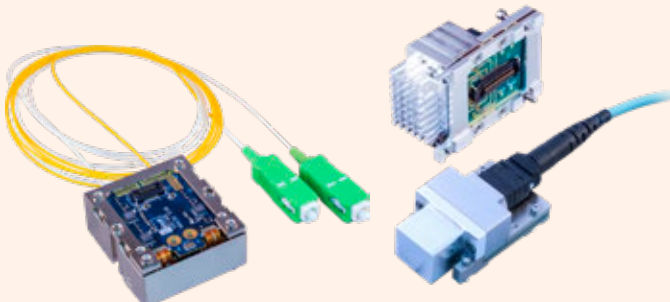

RF-over-fiber low-noise PCB-mount transceiver

Parallel optical 40 Gb/s PCB-mount transceivers

**SIZE #8 PHOTONIC TRANSMITTER AND RECEIVER CONTACTS FOR HIGH-SPEED DATA**


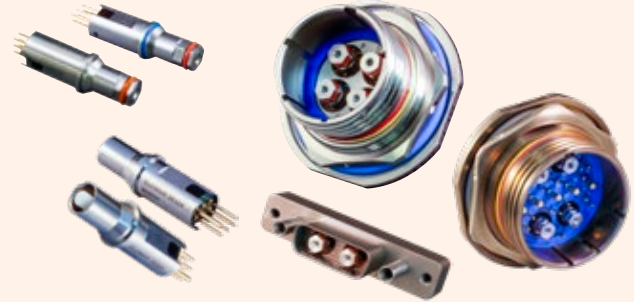


Opto-electronic receptacle connectors populated with Size #8 Photonic transmitter and receiver contacts

HIGH-SPEED  
OCTAXIAL  
CONTACTS

# El Ochito®

High-speed octaxial contacts for Ethernet,  
SuperSpeed USB and multi-gigabit datalinks

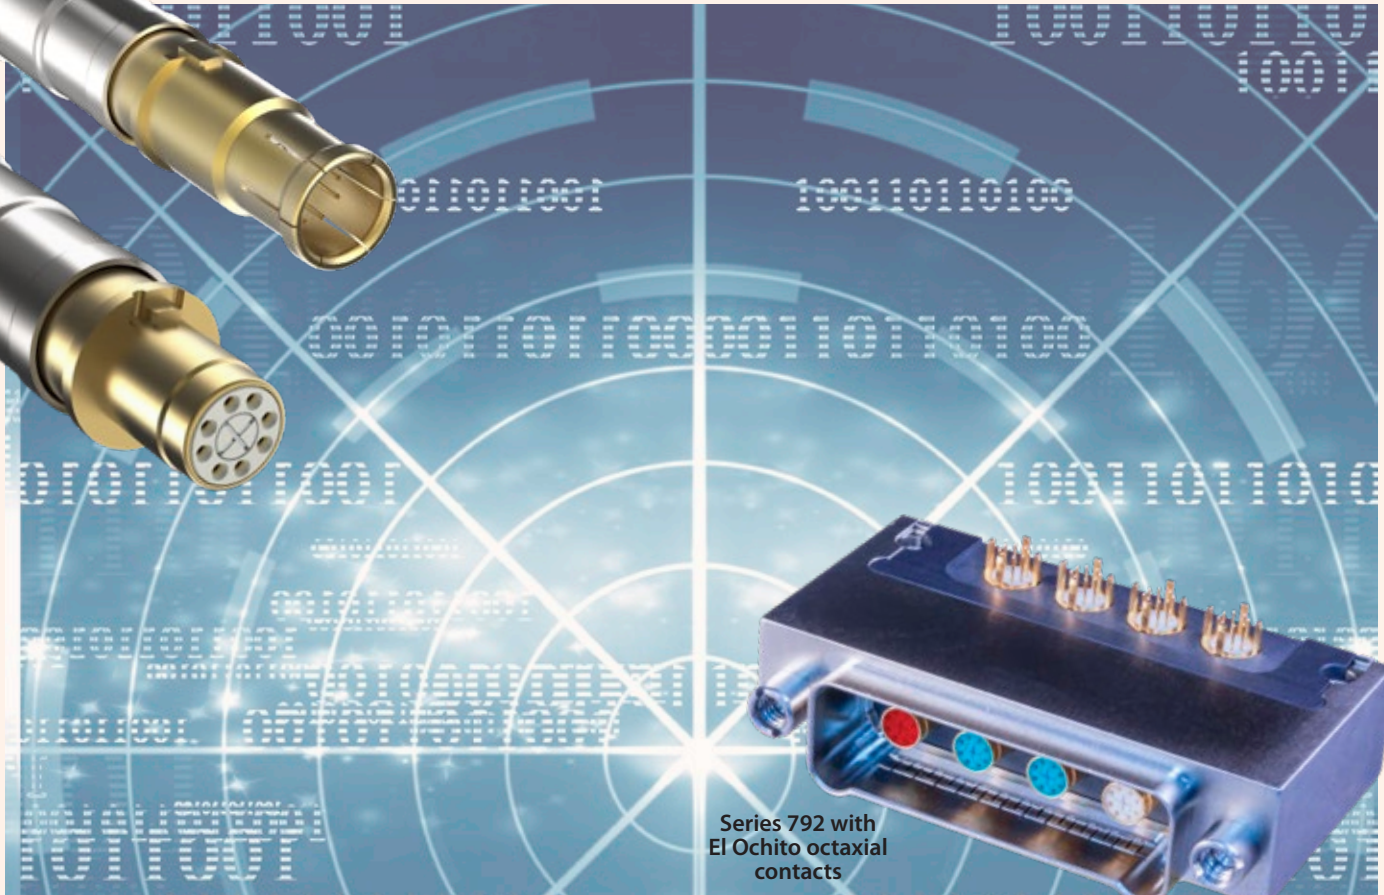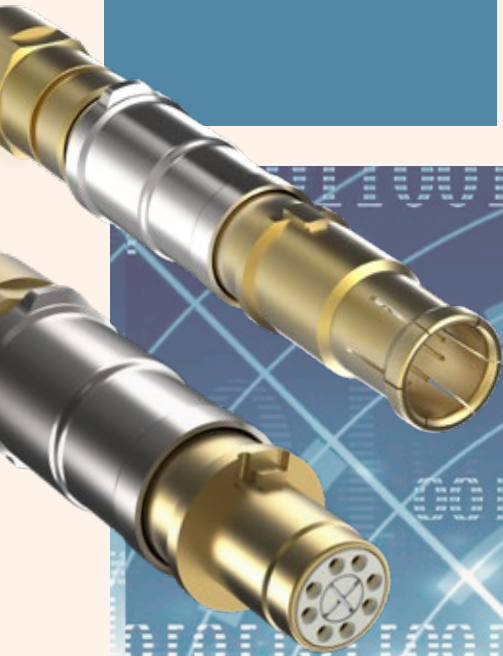

Series 792 with  
El Ochito octaxial  
contacts

High speed, harsh environment El Ochito® octaxial contacts save size and weight in aircraft avionics, weapons systems, satellites, radars, and communications equipment.

## AVAILABLE SIGNATURE CONNECTOR PACKAGING INCLUDES



SuperFly  
Nanominiature

806 Mil-Aero  
Micro miniature

SuperNine  
"Better than QPL" 38999

- 10GbE, SuperSpeed USB, and multi-gigabit shielded pairs
- Universal drop-in for keyed size #8 connector cavities
- Data-pair isolation for optimal signal integrity
- Crimp or threaded shield termination contact types
- Snap-in, rear release
- Environmentally sealed
- Aerospace-grade cable assemblies
- 50% cable / contact reduction compared to Quadrax

## Protocols, exploded views of Type I and Type II contacts

### El Ochito® White



#### 1000BASE-T, 10GBASE-T

El Ochito® White octaxial contacts provide 10GbE in a single size #8 contact cavity (compared to two Quadrax) for 100BASE-T solutions.

### El Ochito® Blue



#### SuperSpeed USB

*Low-dielectric material. 90 ohms.* El Ochito® Blue octaxial contacts provide an aerospace-grade solution for SuperSpeed USB 3.0

### El Ochito® Red




#### HDMI, DisplayPort, SATA


*Low-dielectric material. Up to 5 Gbps. 100 ohms.* El Ochito® Red octaxial contacts provide an aerospace-grade solution for multi-gigabit data rates.

## El Ochito® Type I Contacts, Non-Serviceable

26 AWG, Crimp Wire Shield Termination

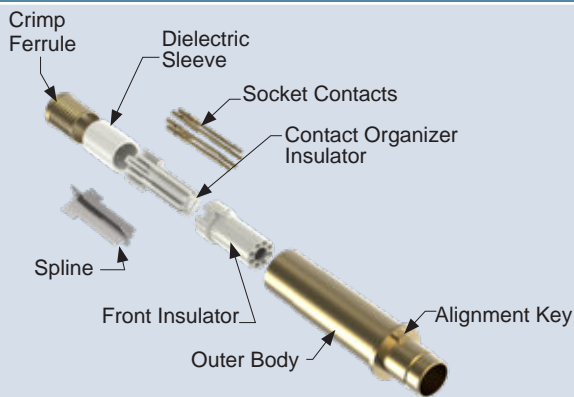


### Type I Pin Contact

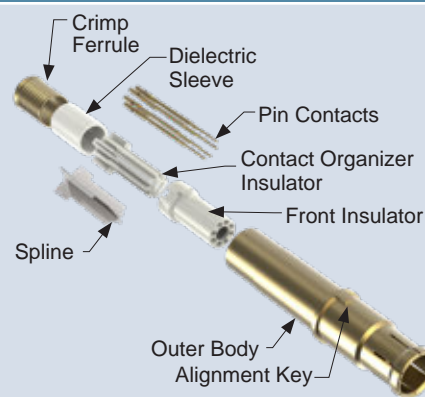


### Type I Socket Contact

## El Ochito® Type II Contacts, Serviceable

24-26 AWG, Threaded Wire Shield Termination, Integral Contact Release Sleeve

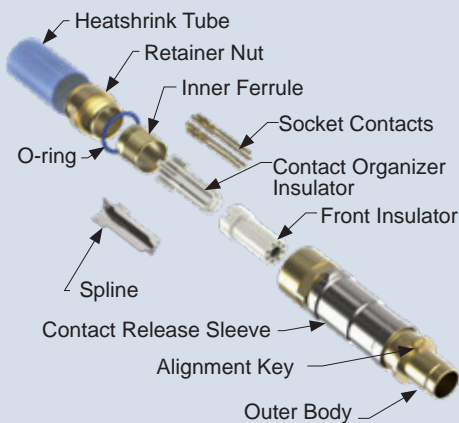

### Type II Pin Contact

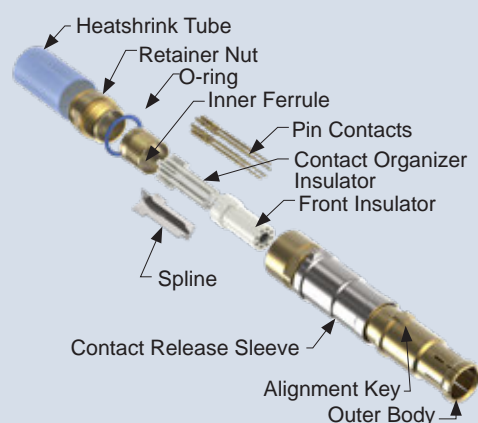

### Type II Socket Contact

# HIGH-SPEED OCTAXIAL El Ochito® White Contacts



## How To Order

### El Ochito® Contacts: How To Order



**Data Protocol: 10G Ethernet**  
El Ochito® White

Connector Type	Wire Size	Cable Type	Cable		El Ochito® Type I		El Ochito® Type II	
			Glenair Part No. <i>(Mfr. P/N)</i>	Cable Dia.	Pin Contact <i>Assembly Instr.</i>	Skt Contact <i>Assembly Instr.</i>	Pin Contact <i>Assembly Instr.</i>	Skt Contact <i>Assembly Instr.</i>
ARINC 600	26	S/UTP	963-003-26 (PIC E6A3826)	.220 (5.56)	858-009-01 AI85074-01	858-010-01 AI85074-01		
		S/FTP	963-033-26 (Gore RCN9047-26)	.220 (5.56)	858-009-02 AI85084-01	858-010-02 AI85084-01		
Series 23 SuperNine®	24	S/UTP	963-037-24	.260 (6.60)			858-005-03 AI85097-03	858-006-03 AI85097-03
		S/FTP	963-033-24	.260 (6.60)			858-005-04 AI85097-04	858-006-04 AI85097-04
Series 801 and 805 Mighty Mouse	26	S/UTP	963-003-26 (PIC E6A3826)	.220 (5.56)	858-003-01F AI85048-01	858-004-01F AI85048-01	858-005-01 AI85097-01	858-006-01 AI85097-01
		S/FTP	963-033-26 (Gore RCN9047-26)	.220 (5.56)	858-003-02F AI85048-02	858-004-02F AI85048-02	858-005-02 AI85097-01	858-006-02 AI85097-01
Series 792	24		963-037-24 (PIC E6A3824)	.260 (6.60)			858-043-03 AI85134-03	858-042-03 AI85134-03
			963-033-24 (Gore RCN9047-24)	.260 (6.60)			858-043-04 AI85134-04	858-042-04 AI85134-04
	26	S/UTP	963-003-26 (PIC E6A3826)	.220 (5.56)	858-045-01F AI85048-01	858-046-01F AI85048-01	858-043-01 AI85134-01	858-042-01 AI85134-01
		S/FTP	963-033-26 (Gore RCN9047-26)	.220 (5.56)	858-045-02F AI85048-02	858-046-02F AI85048-02	858-043-02 AI85134-02	858-042-02 AI85134-02
Series 806	24	S/UTP	963-037-24 (PIC E6A3824)	.260 (6.60)			858-051-03 AI85149-03	858-052-03 AI85149-03
		S/FTP	963-033-24 (Gore RCN9047-24)	.260 (6.60)			858-051-04 AI85149-04	858-052-04 AI85149-04
	26	S/UTP	963-003-26 (PIC E6A3826)	.220 (5.56)	858-045-01F AI85048-01	858-046-01F AI85048-01	858-051-01 AI85149-01	858-052-01 AI85149-01
		S/FTP	963-033-26 (Gore RCN9047-26)	.220 (5.56)	858-045-02F AI85048-02	858-046-02F AI85048-02	858-051-02 AI85149-02	858-052-02 AI85149-02
EPXB	26	S/UTP	963-003-26 (PIC E6A3826)	.220 (5.56)	858-014-02F AI85099-01	858-015-02F AI85099-01		
		S/FTP	963-033-26 (Gore RCN9047-26)	.220 (5.56)	858-014-01F AI85105-01	858-015-01F AI85105-01		

# HIGH-SPEED OCTAXIAL El Ochito® Blue and Red Contacts



## How To Order

### El Ochito® Contacts: How To Order



#### Data Protocol: SuperSpeed USB El Ochito® Blue

Connector Type	Wire Size	Cable Type	Cable		El Ochito® Type I	
			Glenair Part No.	Cable Dia.	Pin Contact Assembly Instr.	Socket Contact Assembly Instr.
Series 792 and 806	26	Commercial Grade (PVC Jacket)	963-118	.217 (5.51)	858-047-01F AI85114-02	858-048-01F AI85114-02
		Aerospace Grade (Fluoropolymer Jacket)	963-110	.236 (5.99)	858-047-02F AI85090-01	858-048-02F AI85090-01
Series 23 SuperNine® Series 801 and 805 Mighty Mouse Series 28 HiPer-D®	26	Commercial Grade (PVC Jacket)	963-118	.217 (5.51)	858-028-01F AI85114-02	858-029-01F AI85114-02
		Aerospace Grade (Fluoropolymer Jacket)	963-110	.236 (5.99)	858-028-02F AI85090-01	858-029-02F AI85090-01
ARINC 600	26	Commercial Grade (PVC Jacket)	963-118	.217 (5.51)	858-038-01 AI85124-01	858-035-01 AI852124-01
		Aerospace Grade (Fluoropolymer Jacket)	963-110	.236 (5.99)	858-038-02 AI85124-02	858-035-02 AI85124-02



#### Data Protocol: HDMI/SATA/DisplayPort/General High-Speed El Ochito® Red

Connector Type	Wire Size	Cable Type	Cable		El Ochito® Type I	
			Glenair Part No.	Cable Dia.	Pin Contact Assembly Instr.	Socket Contact Assembly Instr.
Series 792 and 806	26	4 Pair S/FTP	1Gb/s and above 963-122-X*	.299 (7.59)	858-049-01F* AI85048-02	858-050-01F* AI85048-02
Series 23 SuperNine® Series 801 and 805 Mighty Mouse Series 28 HiPer-D®			Up to 1Gb/s 963-033-26	.220 (5.56)	858-030-02F* AI85048-02	858-031-02F* AI85048-02
ARINC 600			HDMI/Display Port 963-120-X* 963-127-X*	.429 (10.9) .330 (8.38)	858-039-01 AI85084-01	858-037-01 AI85084-01
Series 792 and 806	26	Parallel Pair Twinax	SATA 963-043-26 [2 pcs.]	.116 x .071 (2.95 x 1.80)	858-049-02 AI85084-02	858-050-02 AI85084-02
Series 23 SuperNine® Series 801 and 805 Mighty Mouse Series 28 HiPer-D®					858-030-03 AI85084-03	858-031-03 AI85084-03
ARINC 600					858-039-02 AI85084-02	858-037-02 AI85084-02

\* Omit F when using this cable

HIGH-SPEED  
ULTRA  
MINIATURE  
I/O DATALINKS

# SUPERFLY DATALINK



The Nano Miniature 10G Ethernet, USB 3.0,  
and DisplayPort Connector with El Ochito®  
Octaxial Contact Technology



High speed, harsh environment SuperFly® Datalink connectors—  
with shielded El Ochito® octaxial contacts for 10Gb Ethernet,  
SuperSpeed USB, and high data rate video display protocols—  
deliver outstanding signal integrity and save significant size and  
weight compared to Quadrax.



**SuperFly Datalink  
White**

1000BASE-T Ethernet  
10G Ethernet



**SuperFly Datalink  
Blue**

USB 2.0  
SuperSpeed USB 3.0



**SuperFly Datalink  
Red**

eSATA / SATA  
DVI-D (single)  
HDMI • DisplayPort

- Ultra-small size
- Shielded Octaxial contacts
- Up to 5 Gbps
- 10Gb Ethernet and SuperSpeed USB
- New Red insert for high-speed video, consult factory for layouts
- Environmentally protected
- Factory-terminated cables or discrete contacts and cables for customer assembly

The high-speed nano miniature connector for harsh environments

**CONNECTOR CONFIGURATIONS**

Quick-disconnect “push-pull” versions are ideal for tactical gear. Threaded-coupling versions are intended for aircraft and space-grade applications where secure mating is a requirement.



Quick Disconnect



Threaded Coupling



Straight PC Tails




Right Angle PC Tails




**Conformal-coating-compliant panel mount connectors**

**Push-Pull Quick-Disconnect**

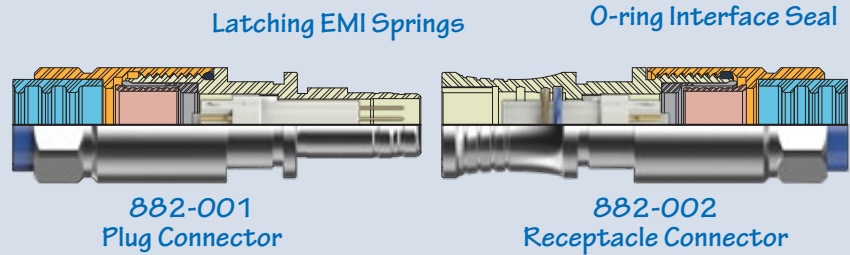

Push-pull SuperFly Datalink receptacle connectors feature two canted coil springs for secure mating and excellent EMI protection. A fluorosilicone O-ring provides watertight sealing when mated.

**Cable Connector**

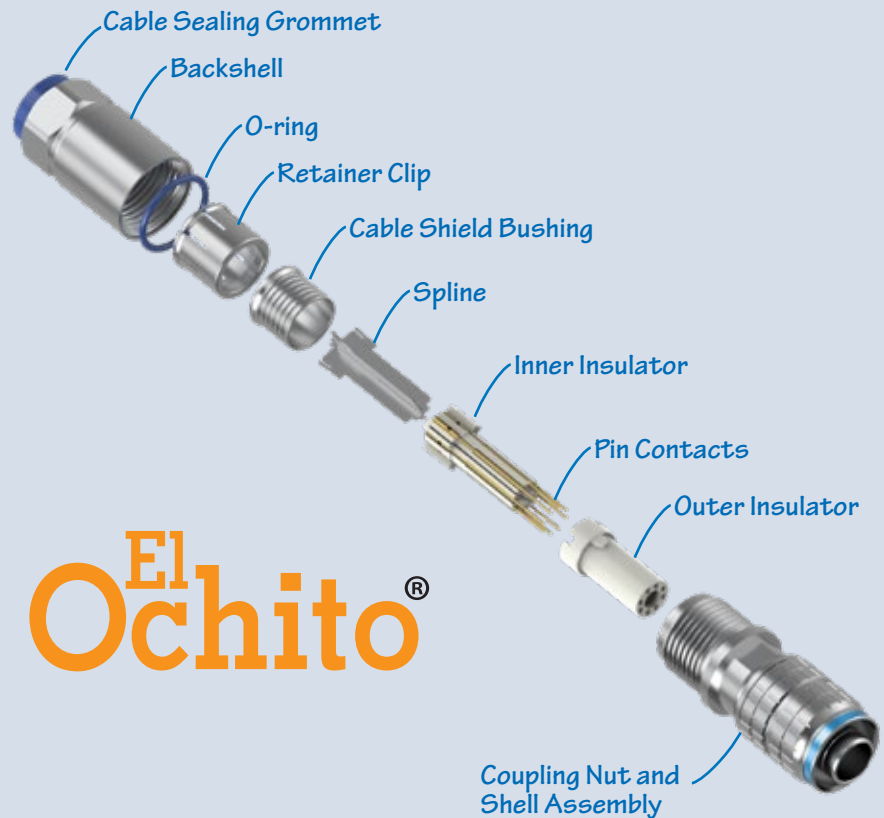

**EI Ochito®**

Cable connectors feature gold-plated crimp contacts, precision insulators, integral backshell, sealing grommet and machined shells.

**Selection Guide: SuperFly Datalink White for Ethernet**



**SuperFly Datalink Connectors, Octaxial, White**

White dielectric indicates 100 ohm differential impedance for Ethernet protocols. Ideal for 1000BASE-T and 10GBASE-T applications in hostile environments with temperature extremes, high vibration, electromagnetic interference, as well as moisture exposure. Compatible with SAE AS6070 200°C flight-grade cable. Accepts 24 AWG or 26 AWG wire sizes. Available with secure threaded coupling or push-pull mating.

**Quick Disconnect for 10Gb Ethernet**



**882-001 Cable Plug**

Integral backshell and cable grommet. Supplied as unassembled kit for termination to Cat 6A Ethernet cable.



**882-002 Cable Receptacle**

Integral backshell and cable grommet. Supplied as unassembled kit for termination to Cat 6A Ethernet cable. Mates to 881-001.



**882-005 Panel Receptacle, PCB**

Rear panel jam nut mount receptacle has O-ring seals and epoxy potting for watertight sealing. Mates with 882-001.



**882-008 Panel Receptacle, 90° PCB**

Rear panel jam nut mount receptacle has O-ring seals and epoxy potting for watertight sealing. Mates with 882-001.



**8571-0007 Cordset, Single-Ended**

Pre-wired with aerospace-grade CAT 6A Ethernet cable. Cable has plug or receptacle on one end, other end is unterminated.



**8571-0008 Cordset, Double-Ended**

Pre-wired with aerospace-grade CAT 6A Ethernet cable. Cable has plug on one end and receptacle on the other end.



**8571-0009 RJ45 Patchcord, Ground**

Pre-wired with commercial-grade CAT 6A Ethernet cable. Cable has RJ45 plug on one end and plug or receptacle on the other end.



**8571-0010 RJ45 Patchcord, Flight**

Pre-wired with flight-grade CAT 6A Ethernet cable. Cable has RJ45 plug on one end and plug or receptacle on the other end.

**Threaded Coupling for 10Gb Ethernet**



**882-003 Cable Plug**

Integral backshell and cable grommet. Supplied as unassembled kit for termination to Cat 6A Ethernet cable.



**882-006 Cable Receptacle**

Integral backshell and cable grommet. Supplied as unassembled kit for termination to Cat 6A Ethernet cable. Mates with 882-003.



**882-004 Panel Receptacle, PCB**

Rear panel jam nut mount receptacle has O-ring seals and epoxy potting for watertight sealing. Mates with 882-003.



**882-007 Panel Receptacle, 90° PCB**

Rear panel jam nut mount receptacle has O-ring seals and epoxy potting for watertight sealing. Mates with 882-003.



**8571-0012 Cordset, Single-Ended**

Pre-wired with aerospace-grade CAT 6A Ethernet cable. Cable has plug or receptacle on one end, other end is unterminated.



**8571-0013 Cordset, Double-Ended**

Pre-wired with aerospace-grade CAT 6A Ethernet cable. Cable has plug on one end and receptacle on the other end.



**8571-0015 RJ45 Patchcord, Ground**

Pre-wired with commercial-grade CAT 6A Ethernet cable. Cable has RJ45 plug on one end and plug or receptacle on the other end.



**8571-0016 RJ45 Patchcord, Flight**

Pre-wired with flight-grade CAT 6A Ethernet cable. Cable has RJ45 plug on one end and plug or receptacle on the other end.

**Flight-Grade 100 Ohm Ethernet Cable**



**963-033 S/FTP Cable**

24 and 26 AWG. S/FTP construction, foil shielded data pairs. High performance shielded cable is AS6070/5 and /6 approved.



**963-003 and 963-037 S/UTP Cable**

24 and 26 AWG. S/UTP construction with fluoropolymer spline. Meets FAA flammability requirements.

Selection Guide: SuperFly Datalink Blue for USB 3.0



**SuperFly Datalink Connectors, Octaxial, Blue**

Blue dielectric indicates 90 ohm differential impedance for SuperSpeed USB. Ideal for USB 3.0 applications in hostile environments with temperature extremes, vibration, electromagnetic interference and moisture exposure. Designed for use with high performance aerospace grade USB 3.0 cable. Available with threaded coupling or push-pull mating.

**Quick Disconnect for USB 3.0**

**882-009 Cable Plug**

Integral backshell and cable grommet. Supplied as unassembled kit for termination to USB 3.0 cable.



**882-010 Cable Receptacle**

Integral backshell and cable grommet. Supplied as unassembled kit for termination to USB 3.0 cable. Mates to 881-009.



**882-013 Panel Receptacle, PCB**

Rear panel jam nut mount receptacle has O-ring seals and epoxy potting for watertight sealing. Mates with 882-009.



**882-016 Panel Receptacle, 90° PCB**

Rear panel jam nut mount receptacle has O-ring seals and epoxy potting for watertight sealing. Mates with 882-009.



**8572-0006 Cordset, Single-Ended**

Pre-wired with aerospace-grade or commercial-grade USB 3.0 cable. Cable has plug or receptacle on one end, other end is unterminated.



**8572-0007 Cordset, Double-Ended**

Pre-wired with aerospace-grade or commercial-grade USB 3.0 cable. Cable has plug on one end and receptacle on the other end.



**8572-0008 Patchcord, USB**

Pre-wired with commercial-grade USB 3.0 cable. Cable has standard USB connector on one end, other end is SuperFly Datalink.



**Threaded Coupling for USB 3.0**

**882-011 Cable Plug**

Integral backshell and cable grommet. Supplied as unassembled kit for termination to USB 3.0 cable.



**882-014 Cable Receptacle**

Integral backshell and cable grommet. Supplied as unassembled kit for termination to USB 3.0 cable. Mates with 882-011.



**882-012 Panel Receptacle, PCB**

Rear panel jam nut mount receptacle has O-ring seals and epoxy potting for watertight sealing. Mates with 882-011.



**882-015 Panel Receptacle, 90° PCB**

Rear panel jam nut mount receptacle has O-ring seals and epoxy potting for watertight sealing. Mates with 882-011.



**8572-0010 Cordset, Single-Ended**

Pre-wired with aerospace-grade or commercial-grade USB 3.0 cable. Cable has plug or receptacle on one end, other end is unterminated.



**8572-0011 Cordset, Double-Ended**

Pre-wired with aerospace-grade or commercial-grade USB 3.0 cable. Cable has plug on one end and receptacle on the other end.



**8572-0013 Patchcord, USB**

Pre-wired with commercial-grade USB 3.0 cable. Cable has standard USB connector on one end, other end is SuperFly Datalink.



**90 Ohm USB 3.0 Cable**

**963-110 Flight-Grade Cable**

High temperature, high performance, fluoropolymer materials, shielded. High speed pairs have braid shields. -65° to +200°C.



**963-118 Commercial-Grade Cable**

Black PVC jacket, foamed PE wire insulation. High speed pairs have foil shields. 0 to +80°C.




HIGH-SPEED  
RACK-AND-PANEL  
CONNECTOR  
WITH EL OCHITO®  
OCTAXIAL CONTACTS



The next-generation micro miniature rectangular connector with El Ochito contacts for high-speed aerospace applications



The Series 792 connector brings high-speed data-rate performance to the Glenair Series 79 rectangular family. Size 8 cavities accept standard Quadrax or El Ochito® shielded octaxial contacts making it a perfect choice for radars, weapons systems, mission computers and displays, communications gear, and more.

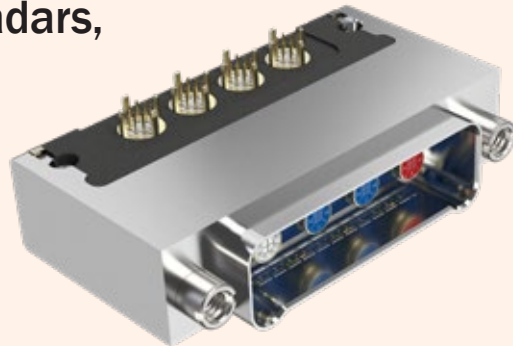

**El Ochito®**

- High-speed Ethernet, USB 3.0, HDMI, and DisplayPort
- PCB-mount and cable connectors
- Scoop-proof interface
- 12 arrangements and 6 shell sizes
- Precision-machined dual-lobe polarized shells
- Environmentally sealed
- Integrated EMI shielding and grounding
- Blind mating



# HIGH-SPEED Series 792

The next-generation micro miniature rectangular for high-speed / high-data rate aerospace applications



## Save Size and Weight with Series 792 Connectors

The Multi-Port Multi-Protocol Connector with El Ochito® Contacts

### About The Series 792

The Series 792 brings high-speed board-to-wire capability to the Glenair Series 79 family of ultraminiature rectangular connectors. The Series 792 is intended for avionics and aerospace equipment exposed to high-vibration and hostile environments.

The 792 supports quadrax contacts for ARINC 664 and El Ochito® octaxial contacts for 10Gb Ethernet, USB 3.0, HDMI and other protocols.

Machined aluminum alloy shells feature dual lobes for polarization. Pin contacts are recessed to prevent scooping damage. Crimp contacts conform to M39029 requirements and are rear release.

An optional ground spring in the receptacle minimizes EMI. Fluorosilicone face seals and wire grommets protect from moisture and contamination. Panel mount versions are available with an O-ring—or for improved panel bonding—a metal spring.


Board mount versions include straight or right angle terminals. Right angle PCB connectors feature an aluminum cover for added EMI protection.

#### Metal EMI Panel Spring

A gold-plated panel spring option is available for Series 792 connectors with panel mount flanges. This spring provides improved electrical bonding.



**Twinax, Quadrax and El Ochito®** Connectors are available in three configurations: twinax for a single high-speed wire pair, quadrax for two data pairs, and El Ochito® for four data pairs.

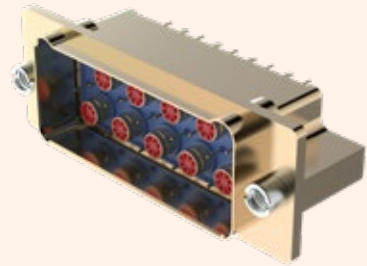

#### Up to 9 data ports

The Series 792 Size F with nine ports is the largest connector in the series and is the only two row version. Sizes A – E, with one to five ports, are single row.



#### PCB Connectors

Series 792 PCB connectors have straight or right angle PC tails. Contacts are non-removable and are epoxy sealed. Right-angle connectors eliminate the need for board-to-panel I/O jumpers.



#### Panel Mount

Panel mount connectors have an O-ring and threaded mounting holes for easy installation. Suitable for blind mate modules, the Series 792 is available with guide pins and float mounts.



El Ochito® White	El Ochito® Blue	El Ochito® Red
GbE 10GbE	USB 3.0	HDMI, SATA, DisplayPort

#### El Ochito® Contacts

Series 792 connectors feature El Ochito® octaxial contacts for Ethernet, SuperSpeed USB, HDMI, DisplayPort, SATA and other multi-gigabit protocols. Multiple protocols can be supported in a single multi-port connector.



#### Cable Connectors

Quadrax and El Ochito® contacts snap into Series 792 cable connectors and are easily removed with a standard plastic tool. Alignment keys provide correct orientation.

# HIGH-SPEED Series 792



The next-generation micro miniature rectangular for high-speed / high-data rate aerospace applications

**Cable Connectors**  
Snap-in crimp contacts

Plug	Receptacle
<b>792-001</b>	<b>792-002</b>

**Panel Mount Connectors**  
Snap-in crimp contacts

Plug	Receptacle
<b>792-003</b>	<b>792-004</b>

**Float Mount Connectors**  
Snap-in crimp contacts

Plug	Receptacle
<b>792-013</b>	<b>792-014</b>

**EI Ochito® Printed Circuit Board Connectors with Octaxial Contacts**  
Epoxy-sealed non-removable PCB terminals

<b>Straight PCB</b>		<b>Panel Mt Straight PCB</b>		<b>90° PCB</b>		<b>Panel Mount 90° PCB</b>	
Plug	Receptacle	Plug	Receptacle	Plug	Receptacle	Plug	Receptacle
<b>792-005</b>	<b>792-006</b>	<b>792-007</b>	<b>792-008</b>	<b>792-009</b>	<b>792-010</b>	<b>792-011</b>	<b>792-012</b>

**Quadrax Printed Circuit Board Connectors**  
Epoxy-sealed non-removable PCB terminals

<b>Straight PCB</b>		<b>Panel Mt Straight PCB</b>		<b>90° PCB</b>		<b>Panel Mount 90° PCB</b>	
Plug	Receptacle	Plug	Receptacle	Plug	Receptacle	Plug	Receptacle
<b>792-018</b>	<b>792-019</b>	<b>792-020</b>	<b>792-021</b>	<b>792-022</b>	<b>792-023</b>	<b>792-024</b>	<b>792-025</b>

**Series 792 High-speed Ultraminiature Rectangular Connectors with EI Ochito® Octaxial Contacts**

EI Ochito® White GbE 10GbE	EI Ochito® Blue USB 3.0	EI Ochito® Red HDMI, SATA, DisplayPort

- 10GbE, SuperSpeed USB, and multi-gigabit shielded pairs
- Crimp shield termination and threaded contact types
- Snap-in, rear release
- Environmentally protected
- Aerospace-grade performance

**RECOMMENDED BACKSHELL**

**799-164**  
Split EMI Banding Backshell

NEXT-GENERATION  
HIGH-SPEED  
MICRO  
MINIATURE  
CONNECTORS

SERIES  
**806**  
MIL-AERO

Advanced performance,  
reduced size and weight  
connector series IAW  
MIL-DTL-38999



Innovative design meets key performance benchmarks for harsh vibration, shock, and environmental settings—as well as high-altitude, unpressurized aircraft zones with aggressive voltage ratings and altitude immersion standards.

**El Ochito®**

- High-speed Ethernet, USB 3.0, HDMI, and DisplayPort
- Next-generation small form factor aerospace-grade circular connector
- Upgraded environmental, electrical and mechanical performance
- Integrated anti-decoupling technology
- High-Speed El Ochito® and hybrid #22HD contact arrangements

**SAVE SIZE AND WEIGHT WITH SERIES 806 CONNECTORS**

Series 806 Mil-Aero  
Smallest Size  
.500 In. Mating Threads  
3 #20 Contacts or 7 #22  
contacts







MIL-DTL-38999  
Smallest Size  
.625 In. Mating Threads  
3 #20 Contacts or 6 #22  
contacts

# HIGH-SPEED Series 806 Mil-Aero Micro Miniature Circular Connectors with El Ochito® octaxial contacts



## Series 806 with El Ochito® contact arrangements








Insert Arrangement  
No. of Contacts

10-1  
1x #8

14-20A  
1x #8 | 19x #22HD

16-2  
2x #8

16-22  
2x #8 | 20x #22HD








Insert Arrangement  
No. of Contacts

18-3  
3x #8

18-21  
3x #8 | 18x #22HD

20-4  
4x #8

20-28  
4x #8 | 24x #22HD



Insert Arrangement  
No. of Contacts

22-5  
5x #8

22-44  
4x #8 | 40x #22HD

24-8  
8x #8

24-97  
4x #8 | 93x #22HD

### Polarizing Positions

Position	A°	B°	C°	D°
A	105	140	215	265
B	102	170	248	305
C	80	150	230	295
D	68	140	205	275
E	64	155	234	304
F	72	120	200	298


### FEATURES

- Triple-start stub ACME mating thread
- El Ochito® Octaxial and hybrid High density #22HD arrangements for reduced size / weight and high-speed performance
- Aerospace-grade materials, construction, and performance

### CONNECTOR CONSTRUCTION

- Shell and coupling nut: aluminum or stainless steel
- Contacts: copper alloy, gold plating
- Wire grommet: fluorosilicone
- Dielectric inserts: high grade rigid dielectric
- Peripheral seal: fluorosilicone
- Ground spring: copper alloy, nickel plating
- Contact retention clips: copper alloy
- Ratchet springs: stainless steel, passivated
- Retainer rings: stainless steel, passivated
- Clinch nuts: stainless steel, passivated


### RECOMMENDED BACKSHELL

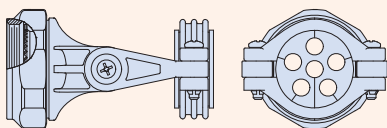


**627-259**

Swing-Arm 3-in-1 strain relief  
with cable bushing (consult factory)


# HIGH-SPEED Series 806 Mil-Aero Micro Miniature Circular Connectors with El Ochito® octaxial contacts

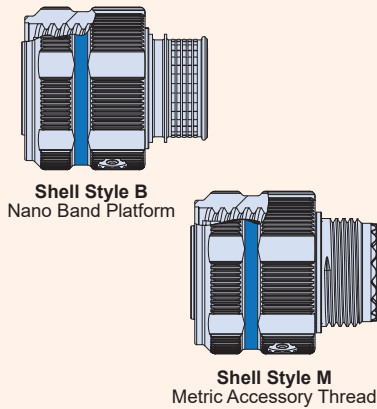

How To Order Series 806 El Ochito® Plugs						
SAMPLE PART NUMBER	806-012	-ME	18-3	S	M	A
<b>Product</b>	806-012 = Cable Plug					
<b>Shell Material and Finish</b>	ME = Aluminum, Electroless Nickel MT = Aluminum, Ni/PTFE ZR = Aluminum, Black Zinc-Nickel NF = Aluminum, Olive Drab Cadmium Z1 = Stainless Steel, Passivated					
<b>Arrangement Number (Shell Size - Insert Arr.)</b>	See Contact Arrangements Table					
<b>Contact Type</b>	Connector supplied without contacts A = Pin B = Socket					
<b>Shell Style</b>	M = Metric accessory threads B = Nano Band platform					
<b>Polarizing Position</b>	A B C D E F					

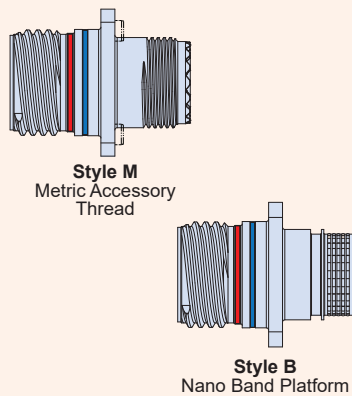


How To Order Series 806 El Ochito® Square Flange Receptacles							
SAMPLE PART NUMBER	806-013	-MT	18-21	P	B	C	A
<b>Product</b>	806-013 = Panel Receptacle, Square Flange, Crimp						
<b>Shell Material and Finish</b>	ME = Aluminum, Electroless Nickel MT = Aluminum, Ni/PTFE ZR = Aluminum, Black Zinc-Nickel NF = Aluminum, Olive Drab Cadmium Z1 = Stainless Steel, Passivated						
<b>Arrangement Number (Shell Size - Insert Arr.)</b>	See Contact Arrangements Table						
<b>Contact Type</b>	Connector supplied without contacts A = Pin B = Socket						
<b>Shell Style</b>	M = Metric accessory threads B = Nano Band platform						
<b>Mounting Hole Style</b>	T = Thru holes C = Clinch nut, #4-40 (rear panel mounting)						
<b>Polarizing Position</b>	A B C D E F						

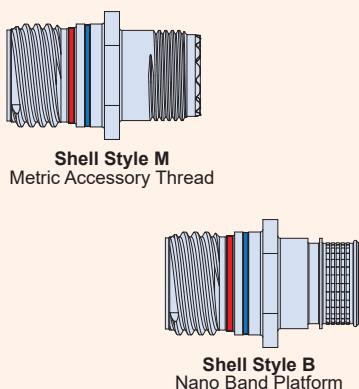

How To Order Series 806 El Ochito® In-Line Receptacles						
SAMPLE PART NUMBER	806-019	-MT	18-21	P	B	A
<b>Product</b>	806-019 = In-Line Receptacle					
<b>Shell Material and Finish</b>	ME = Aluminum, Electroless Nickel MT = Aluminum, Ni/PTFE ZR = Aluminum, Black Zinc-Nickel NF = Aluminum, Olive Drab Cadmium Z1 = Stainless Steel, Passivated					
<b>Arrangement Number (Shell Size - Insert Arr.)</b>	See Contact Arrangements Table					
<b>Contact Type</b>	Connector supplied without contacts A = Pin B = Socket					
<b>Shell Style</b>	M = Metric accessory threads B = Nano Band platform					
<b>Polarizing Position</b>	A B C D E F					

# HIGH-SPEED Series 806 Mil-Aero Micro Miniature Circular Connectors with El Ochito® octaxial contacts

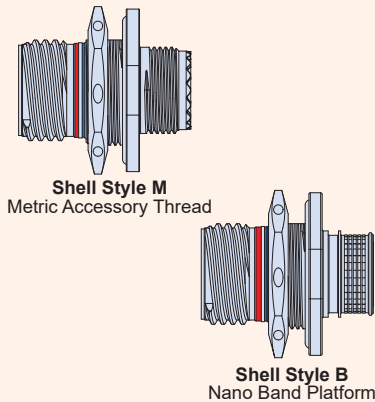



How To Order Series 806 El Ochito® Jam Nut Receptacles							
SAMPLE PART NUMBER		806-020	-MT	18-21	P	B	A
<b>Product</b>	806-020 = Jam Nut Receptacle						
<b>Shell Material and Finish</b>	ME = Aluminum, Electroless Nickel MT = Aluminum, Ni/PTFE ZR = Aluminum, Black Zinc-Nickel NF = Aluminum, Olive Drab Cadmium Z1 = Stainless Steel, Passivated						
<b>Arrangement Number (Shell Size - Insert Arr.)</b>	See Contact Arrangements Table						
<b>Contact Type</b>	Connector supplied without contacts A = Pin B = Socket						
<b>Shell Style</b>	M = Metric accessory threads B = Nano Band platform						
<b>Polarizing Position</b>	A B C D E F						

**Table VI - Ochito Contact Positions**

B = Blue, R = Red, W = White

SYM	El Ochito Contact Designator							
	A	B	C	D	E	F	G	H
E	W	W	W	W	W	W	W	W
E2	B	W	W	W	W	W	W	W
E3	R	W	W	W	W	W	W	W
E4	B	B	W	W	W	W	W	W
E5	R	B	W	W	W	W	W	W
E6	R	R	W	W	W	W	W	W
E7	B	B	B	W	W	W	W	W
E8	R	B	B	W	W	W	W	W
E9	R	R	B	W	W	W	W	W
E10	R	R	R	W	W	W	W	W
E11	B	B	B	B	W	W	W	W
E12	R	B	B	B	W	W	W	W
E13	R	R	B	B	W	W	W	W
E14	R	R	R	B	W	W	W	W
E15	R	R	R	R	W	W	W	W
E16	B	B	B	B	B	W	W	W
E17	R	B	B	B	B	W	W	W
E18	R	R	B	B	B	W	W	W
E19	R	R	R	B	B	W	W	W
E20	R	R	R	R	B	W	W	W
E21	R	R	R	R	R	W	W	W
E22	B	B	B	B	B	B	W	W
E23	R	B	B	B	B	B	W	W
E24	R	R	B	B	B	B	W	W
E25	R	R	R	B	B	B	W	W
E26	R	R	R	R	B	B	W	W
E27	R	R	R	R	R	B	W	W
E28	R	R	R	R	R	R	W	W
E29	B	B	B	B	B	B	B	W
E30	R	B	B	B	B	B	B	W
E31	R	R	B	B	B	B	B	W
E32	R	R	R	B	B	B	B	W
E33	R	R	R	R	B	B	B	W
E34	R	R	R	R	R	B	B	W
E35	R	R	R	R	R	R	B	W
E36	R	R	R	R	R	R	R	W
E37	B	B	B	B	B	B	B	B
E38	R	B	B	B	B	B	B	B
E39	R	R	B	B	B	B	B	B
E40	R	R	R	B	B	B	B	B
E41	R	R	R	R	B	B	B	B
E42	R	R	R	R	R	B	B	B
E43	R	R	R	R	R	R	B	B
E44	R	R	R	R	R	R	R	B
E45	R	R	R	R	R	R	R	R

How To Order Series 806 El Ochito® PCB Receptacles									
SAMPLE PART NUMBER		806-039	-MT	14	E	-	20A	P	A
<b>Product</b>	806-039 = Jam Nut 806-040 = Square-Flange								
<b>Shell Material and Finish</b>	ME = Aluminum, Electroless Nickel MT = Aluminum, Ni/PTFE ZR = Aluminum, Black Zinc-Nickel NF = Aluminum, Olive Drab Cadmium Z1 = Stainless Steel, Passivated								
<b>Shell Size</b>	10, 14, 16, 18, 20, 22, 24								
<b>Contact Type</b>	See Table VI								
<b>Ground Option</b>	G = Common Ground - = None								
<b>Contact Arrangement Number</b>	See Contact Arrangements Table								
<b>Contact Gender</b>	P = Pin S = Socket								
<b>Panel Mount Thru-Hole Style</b>	(for 806-040 square-flange only) T = Thru-Hole C = Clinch Nuts for Rear Panel Mount Omit for 806-039 Jam Nut								
<b>Polarizing Position</b>	A B C D E F								



“Better than QPL” MIL-DTL-38999  
High-Speed Solution



## SuperNine® high-speed connectors with special inserts to accommodate El Ochito® octaxial contacts

- **Tooled and ready-to-ship high-speed and hybrid insert arrangement connectors for size #8 El Ochito shielded contacts. Arrangements for #8, #12, and #16 Coax, Twinax, and Quadrax also available**
- **Supported applications: 10/100/1G/10G BASE-T Ethernet, HDMI, DisplayPort, SATA, USB 3.0 , 1553 databus and general RF or differential data transmission**


## El Ochito®



### EL OCHITO CONTACT REFERENCE GUIDE

Contact Type	White, Type I	White, Type II	Blue, Type I	Red, Type I
Pin	858-003	858-005	858-028	858-030-01
Socket	858-004	858-006	858-029	858-031

### RECOMMENDED BACKSHELL



**377HS121**

Series 37 Aluminum Backshell for SuperNine plug and receptacle connectors. Straight, 45°, and 90° configurations available.

“BETTER THAN QPL”

# High-Speed SuperNine® MIL-DTL-38999



with El Ochito® octaxial contacts

How To Order SuperNine® High-Speed Connectors with El Ochito contacts										
<b>Sample Part Number</b>	<b>233-217</b>									
<b>Series / Basic Part No.</b>	233-217 with Accessory Thread <b>233-224</b> Integral Banding Porch									
<b>Connector Style</b>	G6 Plug, EMI spring <b>05</b> in-line receptacle <b>07</b> jam-nut recpt. 00 wall mt. recpt., slotted holes <b>CM</b> wall mt. recpt., metric clinch nuts CS wall mt. recpt., std. clinch nuts <b>DO</b> wall mt. recpt., thru holes HM wall mt. recpt., metric helicoils <b>HS</b> wall mt. recpt., std. helicoils									
<b>Material/Finish</b>	NF = Cad/O.D. <b>ME</b> = Electroless Nickel <b>MT</b> = Nickel PTFE <b>ZR</b> = Black Zinc Nickel									
<b>Shell Size</b>	9, 11, 13, 17, 19, 21, 23, 25									
<b>Ground Option</b>	G = Common Ground - = None									
<b>Insert Arrangement</b>	See insert arrangement tables, next pages									
<b>Insert Designator</b>	A = Pin insert, less contacts <b>B</b> = Socket insert, less contacts									
<b>Alternate Polarization*</b>	A, B, C, D, E, N = Normal (IAW MIL-DTL-38999 Series III)									
<b>Optional Mod Code</b>	909XX = Supplies connector with contacts									

How To Order SuperNine® High-Speed Quick-Disconnect Connectors with El Ochito contacts										
<b>Sample Part Number</b>	<b>233-260</b>									
<b>Series / Basic Part No.</b>	233-260 High-Speed Quick Disconnect									
<b>Connector Style</b>	G6 = Quick Disconnect Plug									
<b>Material/Finish</b>	NF = Cad/O.D. <b>ME</b> = Electroless Nickel <b>MT</b> = Nickel PTFE ZR = Black Zinc Nickel <b>Z1</b> = SST, Passivated									
<b>Shell Size</b>	9, 11, 17, 19, 21, 23, 25									
<b>Ground Option</b>	G = Common Ground - = None; See Note 8									
<b>Insert Arrangement</b>	See insert arrangement tables, next pages									
<b>Lanyard Length Code</b>	consult factory or SuperNine catalog									
<b>Contact Style</b>	A = Pin Less Contact <b>B</b> = Socket Less Contact									
<b>Alternate Polarization*</b>	A, B, C, D, E, N = Normal (IAW MIL-DTL-38999 Series III)									
<b>Optional Mod Code</b>	909ES = Connector with El Ochito Socket contacts <b>909EP</b> Connector with El Ochito Pin contacts									

How To Order SuperNine® High-Speed PC-Tail Threaded Standoff Receptacles with El Ochito contacts										
<b>Sample Part Number</b>	<b>233-218</b>									
<b>Series / Basic Part No.</b>	High-Speed PC tail wall mount receptacles, threaded standoffs									
<b>Connector Style</b>	07 jam-nut <b>00</b> wall-mount, slotted holes <b>CM</b> wall mt., metric clinch nuts CS wall mt., std. clinch nuts <b>HM</b> wall mt., metric helicoils <b>HS</b> wall mt., std. helicoils									
<b>Material/Finish</b>	NF = Cad/O.D. <b>ME</b> = Electroless Nickel <b>MT</b> = Nickel PTFE <b>ZR</b> = Black Zinc Nickel									
<b>Shell Size</b>	9, 11, 13, 15, 17, 19, 21, 23, 25									
<b>Contact Type</b>	E = El Ochito <sup>7</sup>									
<b>Ground Option</b>	G = Common Ground - = None									
<b>Insert Arrangement</b>	See insert arrangement tables, next pages									
<b>Contact Style</b>	P = Pin, PC Tail <b>S</b> = Socket, PC Tail									
<b>Alternate Polarization*</b>	A, B, C, D, E, N = Normal (IAW MIL-DTL-38999 Series III)									

How To Order SuperNine® High-Speed Wall Mount Receptacles with El Ochito contacts										
<b>Sample Part Number</b>	<b>233-225</b>									
<b>Series / Basic Part</b>	SuperNine® High-Speed, dual flange wall-mount receptacle									
<b>Connector Style*</b>	07 jam-nut <b>00</b> wall-mount, slotted holes/stand off, std. threads 10 Wall-mount, slotted holes/stand off, metric threads CM wall-mount, metric clinch nuts <b>CS</b> wall mount, std. clinch nuts HM wall mount, metric helicoils <b>HS</b> wall mount, std. helicoils									
<b>Material/Finish</b>	NF = Cad/O.D. <b>ME</b> = Electroless Nickel <b>MT</b> = Nickel PTFE <b>ZR</b> = Black Zinc Nickel									
<b>Shell Size</b>	9, 11, 13, 17, 19, 21, 23, 25									
<b>Contact Type</b>	E = El Ochito									
<b>Ground Option</b>	G = Common Ground - = None									
<b>Insert Arrangement</b>	Per MIL-STD-1560, see page C-5 and C-6									
<b>Contact Style</b>	P = Pin, PC Tail <b>S</b> = Socket, PC Tail									
<b>Alternate Polarization*</b>	A, B, C, D, E, N = Normal (IAW MIL-DTL-38999 Series III)									

# SuperNine® High-speed connectors

## High-speed size #8 and hybrid insert arrangements (note: size #8 cavities keyed for contact polarization)


**Contact Legend**  
 #23 ● #22D ○  
 #16 ⊕ #20 ⊖  
 #12 ◐ #8 ◑



Insert Arrangement	9G5*	11-1	13-14		17-2
No. of Contacts	1x #8	1x #8	1x #8	14x #23	1x #8   38x #22D


\*Only available with ground plane option

**Contact Legend**  
 #23 ● #22D ○  
 #16 ⊕ #20 ⊖  
 #12 ◐ #8 ◑

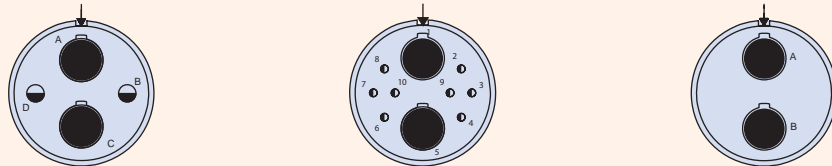


Insert Arrangement	17-22		17-60		17-75
No. of Contacts	2x #8	2x #12	2x #8	8x #22	2x #8

**Contact Legend**  
 #23 ● #22D ○  
 #16 ⊕ #20 ⊖  
 #12 ◐ #8 ◑

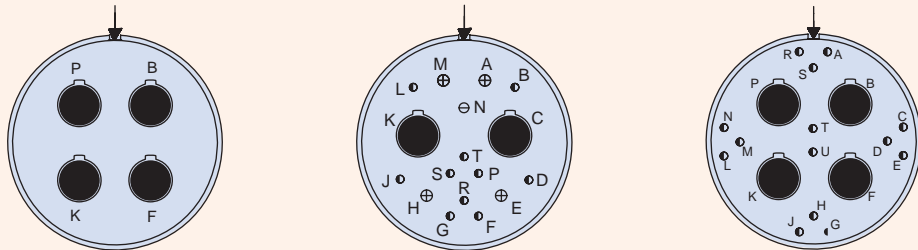

Insert Arrangement	19-4	19-17			19-18		
No. of Contacts	4x #8	2x #8	4x #16	1x #20	10x #22D	4x #8	14x #22D

**Contact Legend**  
 #23 ● #22D ○  
 #16 ⊕ #20 ⊖  
 #12 ◐ #8 ◑

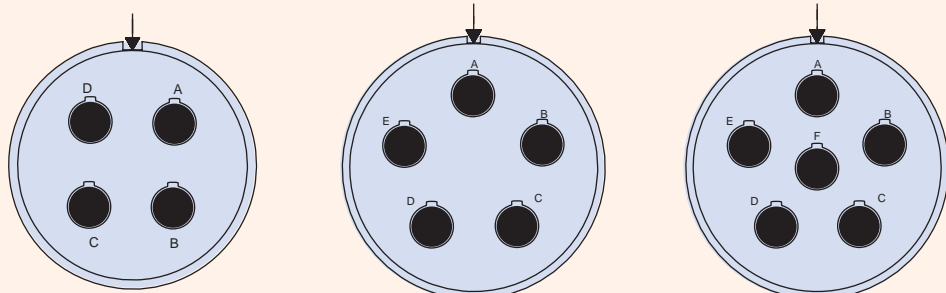


Insert Arrangement	21-75	23-5	23-6
No. of Contacts and Size	4x #8	5x #8	6x #8

# SuperNine® High-speed connectors




High-speed size #8 and hybrid insert arrangements  
(note: size #8 cavities keyed for contact polarization)

Contact Legend  
 #23 ● #22D ○  
 #16 ⊕ #20 ⊖  
 #12 ◐ #8 ◑

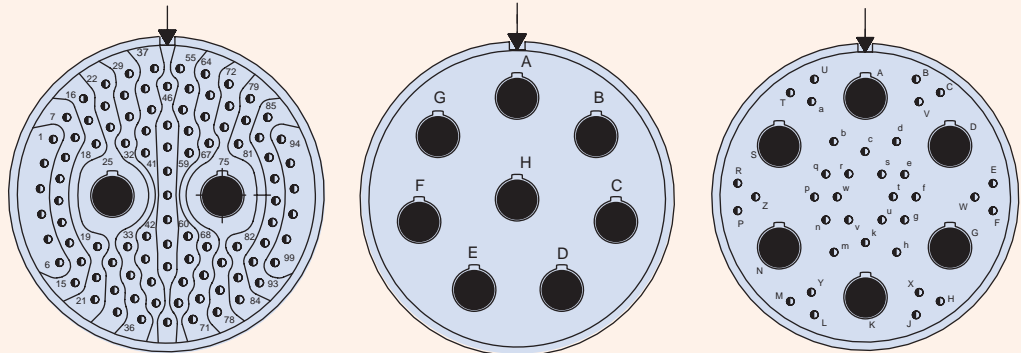


Insert Arrangement	25-7		25-8		25-17	
No. of Contacts and Size	2x #8	97x #22	8x #8	6x #8	36x #22	

Contact Legend  
 #23 ● #22D ○  
 #16 ⊕ #20 ⊖  
 #12 ◐ #8 ◑

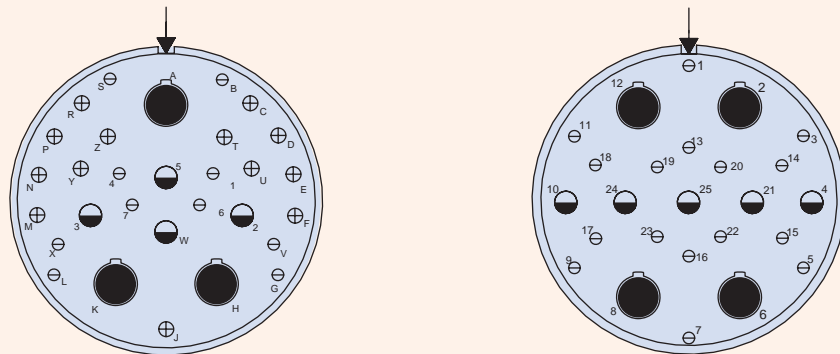

Insert Arrangement	25-20				25-26		
No. of Contacts and Size	3x #8	4x #12	13x #16	10x #20	4x #8	5x #12	16x #20

Contact Legend  
 #23 ● #22D ○  
 #16 ⊕ #20 ⊖  
 #12 ◐ #8 ◑

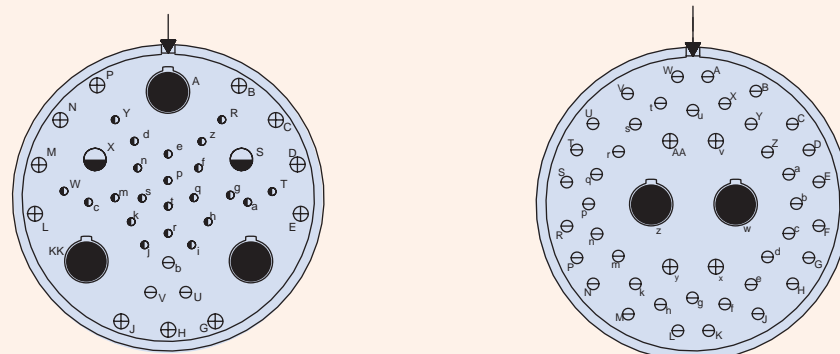

Insert Arrangement	25-41					25-46		
No. of Contacts and Size	3x #8	2x #12	11x #16	3x #20	22x #22D	2x #8	4x #16	40x #20

10G HIGH-SPEED  
CONTACT MODULES  
FOR GLENAIR  
SIGNATURE SERIES  
CONNECTORS



# SPEEDMASTER™

High-speed 10G connection system for  
Glenair SuperNine, Mighty Mouse, and  
HiPer-D connectors



SpeedMaster™ is a dedicated contact module and insert package for SuperNine®, Mighty Mouse, and HiPer-D connectors. Optimized for high-speed Cat 6A Ethernet, the SpeedMaster™ 10G system offers industry-leading NEXT, return loss and insertion loss performance

- Utilizes aerospace industry standard #22D contacts, tools, and widely available Ethernet flight cable
- Significant weight reduction compared to Quadrax solutions (reduces cable requirement by half)



SpeedMaster Mighty Mouse  
Locking Push/Pull Connectors



SpeedMaster HiPer-D Rectangular  
(M24308 intermountable)




SpeedMaster SuperNine  
"better than QPL" connectors

# SpeedMaster™ High-Speed 10G Connection System



for Glenair SuperNine, Mighty Mouse, and HiPer-D connectors

## SPEEDMASTER 10G NEXT-GENERATION HIGH-SPEED CONNECTION SYSTEM

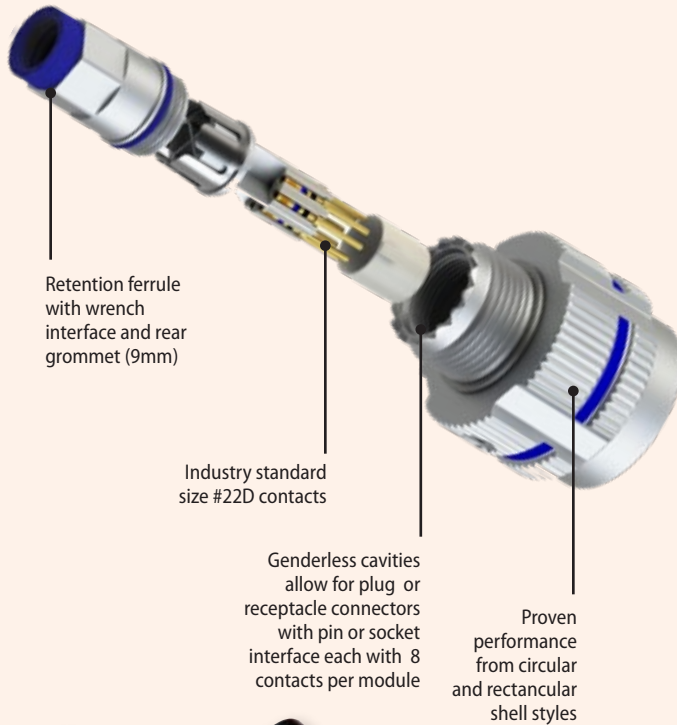

### The SpeedMaster Difference

SpeedMaster, the high-speed multi-contact solution for the Mighty Mouse, HiPer-D and SuperNine 38999 type family of connectors. Each SpeedMaster module consists of 4 pairs of pins or sockets incorporating industry standard size 22D contacts to provide 10G performance. Each module is individually shielded within the shell, and retained in place with a threaded ferrule. Additionally, module cavities are genderless allowing pin or socket interface for plugs or receptacles. Glenair offers these SpeedMaster contacts in 3 connector packages, including our small form factor Mighty Mouse Series 824 Locking Push/Pull, HiPer-D (M24308) hi-performance rectangular D-Sub, and our 38999 type “better than QPL” connectors allowing you to adapt and fit your application needs. These features result in a two fold benefit. An easily removable and repairable, shielded high performance contact packaged within robust industry standard connectors, helping to reduce network downtime and providing a connectorized solution to improve the overall network function and performance. Meet the demand for the next generation Cat 6A networks with SpeedMaster, the next generation contact system from Glenair.



SpeedMaster 10G modular inserts are available for Series 23 SuperNine – 38999, Series 80 Mighty Mouse – Locking Push / Pull and Series 28 HiPer-D – M24308 rectangular D-Sub connectors

The SpeedMaster 10G is optimized for high-speed Ethernet performance and incorporates standard M39029 #22D contacts isolated for superior NEXT, return loss and insertion loss performance

Cable Size			
Cable Size	Cable Ø	Cable Size	Cable Ø
1	.280 (7.11)	5	.240 (6.10)
2	.270 (6.86)	6	.230 (5.84)
3	.260 (6.60)	7	.220 (5.59)
4	.250 (6.35)		

SpeedMaster™ High-Speed Cable					
Cable P/N	Cabel Category	Cable Construction	Wire Gage	Cable Dia.	Assembly Instruction
963-003-24	Cat 6A	SF/UTP	24	.280	AI85082
963-003-26	Cat 6A	SF/UTP	26	.220	
963-037	Cat 6A	SF/UTP	24	.260	
963-033-24	CAT 6A	S/FTP	24	.260	
933-033-26	CAT 6A	S/FTP	26	.220	

# HIGH-SPEED SpeedMaster™ Pre-wired 10G high-speed contacts

## 858-102 10GBase-T Cat 6A Contacts




Pre-wired SpeedMaster assemblies are 100% tested and ready for use. Compatible with Glenair Series 80 Mighty Mouse, Series 28 HiPer-D or Series 23 SuperNine connectors with keyed size #8 cavities, these assemblies are available with three termination options: single-ended, SpeedMaster contacts on both ends, or with an RJ45 plug on one end. Contacts are wired per the guidelines of ARINC 664 Part 2 Appendix N.


### Connector Compatibility

- Glenair 824-009 and -010 Mighty Mouse
- Glenair 280-098 thru -103 HiPer-D
- Glenair 233-219, 233-220 SuperNine

### Contact Positions



Mating Face of Pin Contacts




Mating Face of Socket Contacts


### Part Number Development

Sample Part Number	8575-0001	-A	C	-1	-12
<b>Product</b>	8575-0001				
<b>End A Contact Type</b>	-A = 858-101 SpeedMaster pin -B = 858-100 SpeedMaster socket				
<b>End B Contact/Connector</b>	A = SpeedMaster pin B = SpeedMaster socket C = RJ45 plug N = No connector				
<b>Cable Option</b>	-1 = 963-003-24    -5 = 963-033-24 -2 = 963-003-26    -6 = 963-033-26 -4 = 963-037				
<b>Length</b>	Overall length in inches				



## 8575-0001 SPEEDMASTER™ WIRING DIAGRAMS

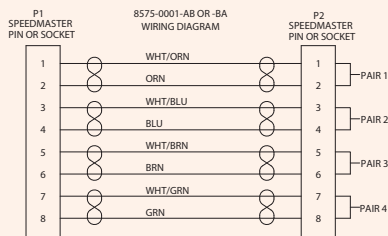

SPEEDMASTER TO SPEEDMASTER IS 1 TO 1. MUST BE PIN TO SOCKET OR SOCKET TO PIN. OMIT P2 FOR 8575-0001-AN OR -BN.



SPEEDMASTER PIN OR SOCKET TO RJ45 PLUG

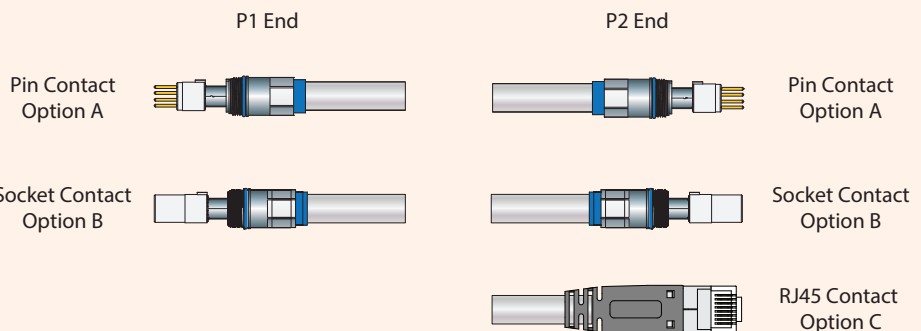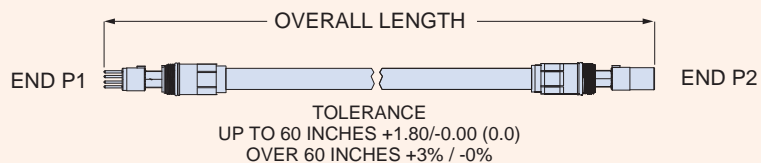

### Specifications

- Operating temperature: -65°C. to +200°C. (SpeedMaster) or -40°C. to +85°C (RJ45); cable dependent
- Meets EIA/TIA 568C.2-10 and IEC 60603-7-51 Cat 6A 500 MHz
- Characteristic Impedance: 100 ohms
- Insulation resistance: 200 megohms min.
- Durability: 500 mating cycles

# HIGH-SPEED SpeedMaster™ Available connector packaging




## MIGHTY MOUSE 824 LOCKING PUSH-PULL



- Quick-disconnect coupling
- Audible, visual, and tactile full-mate indicators

### Available connector configurations

- 824-009-06 Plug
- 824-010-01 In-line Receptacle
- 824-010-00 Front Panel Mount, Jam Nut Receptacle
- 824-010-07 Rear Panel Mount, Jam Nut Receptacle



### Single Contact Module Insert Arrangement

Ideally suited for CAT5E or CAT6A Ethernet applications

## HIPER-D M24308 INTERMOUNTABLE



- Advanced temperature, vibration and EMC/ electrical performance
- Rugged machined one-piece shell

### Series 28 In-Line Connectors

- 280-101M Plug
- 280-098F Receptacle

### Series 28 Rear Panel Mount Connectors

- 280-102M Plug
- 280-099F Receptacle

### Series 28 Float Mount Connectors

- 280-103M Plug
- 280-100F Receptacle

### SpeedMaster HiPer-D Insert Arrangements



## SUPERNINE D38999 SERIES III TYPE




- Advanced performance, "better than QPL" D38999 Series III type bodies and shells
- Optimized for SpeedMaster contact modules

### 233-219 SpeedMaster SuperNine connectors

- G6** = Plug 38999/26
- 05** = Receptacle, in-line
- 07** = Receptacle, jam-nut 38999/24
- 00** = Receptacle, wall mount 38999/20
- CM** = Receptacle, wall mount, metric clinch nuts
- CS** = Receptacle, wall mount, standard clinch nuts
- DO** = Receptacle, wall mount, thru holes
- HM** = Receptacle, wall mount, metric helicoils
- HS** = Receptacle, wall mount, standard helicoils
- TO** = Receptacle, wall mount, tapped holes

### 233-220 SpeedMaster SuperNine PC Tail connectors

- 00** = Wall mount receptacle with slotted holes, standard standoff threads
- 10** = Wall mount receptacle with slotted holes, metric standoff threads
- CM** = Wall mount receptacle with metric clinch nuts
- CS** = Wall mount receptacle with standard clinch nuts
- HM** = Wall mount receptacle with metric helicoils
- HS** = Wall mount receptacle with standard helicoils
- 07** = Jam-nut receptacle

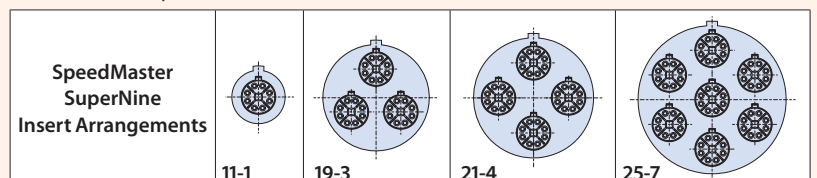

## RECOMMENDED BACKSHELL

**377NS119** Aluminum Alloy Backshell

ETHERNET-READY  
HIGH-SPEED  
INDUSTRIAL-  
STRENGTH



The faster ruggedized 4/8 pole interconnect system for Ethernet data applications



**G**lenair series ITH connectors with Ethernet-ready Octobyte™ contacts are available for harsh-environment mass transit applications that depend on sealed environmental (IP67) connector performance. Octobyte contacts, packaged in ruggedized ITH reverse-bayonet connectors, deliver both dedicated Ethernet datalink as well as mixed serial databus and power for high-speed data applications

Octobyte™ contacts are vibration resistant and designed to work with Ethernet cables from CAT 5 to CAT 7A, MVB-WTB, and RG58 Coax. Reverse-bayonet ITH series connectors with Octobyte™ contacts are easy and fast to assemble and deliver reliable locking performance in severe vibration and shock applications.

- For harsh-environment transit, industrial, or marine/subsea applications
- RF Coax applications (RG58 and RG59U cables)
- High-speed interconnect solution for audio, video, and digital displays
- Qualified for use in safety systems, sensors, detection devices, and control panels
- Tested in accordance with:  
ISO F0 STP: CAT 7A  
EN50173-1 F600-STP: CAT 7  
EN50173-1 D STP: CAT 5E



Tested for compliance IAW EN50173-1 standards for CAT5E and CAT7.  
Proven performance in numerous rail applications (consult factory for references)

**OCTOBYTE CONTACTS FOR ETHERNET CAT 5 • CAT 6 • CAT 7 • COAX • MVB-WBT**

How To Order OctoByte contacts	
Sample Part Number	Q 0 8 P -A B1 -XXX -7A
Product Series	OctoByte contacts
Contact Size	0 = contact size 0
Number of Contacts	8 = 8 poles 4 = 4 poles CX = Coax
Contact Gender	P = Male S = Female
Cable O.D. Range/ Coax Cable Type	A = O.D. 6-7 B = O.D. 7-8 C = O.D. 8-9 RG58 = 50 Ohm RG59U = 75 Ohm [Coax only]
Plating	B1 = gold plating
Alternative Color (Cat 7A only)	G14 = Black G14GN = Green G14GY = Grey G14R = Red G14Y = Yellow Omit for standard
Ethernet	7A = Cat 7A AD = Ethernet MVB - WBT Contacts Omit for Cat 5



**SERIES ITH CONNECTORS FOR OCTOBYTE CONTACTS**

# Reverse bayonet-lock connectors

Rugged environmental performance — the perfect OctoByte packaging solution



Dozens of contact arrangements available including hybrid OctoByte, power, and signal.

- Rugged MIL-DTL-5015 type design with fast reverse bayonet coupling
- Rigid dielectric inserts with contact retention clips
- Positive lock technology provides reliable vibration and shock resistance
- Proven performance in even the most rugged applications
- Conforms to the European VG 95234 standard, French (NFF 61030) and British (BS 6853) electrical standards and EEC compliance directives
- Threaded coupling version available, contact factory for ordering information

Ethernet-ready OctoByte solutions for rail and transit applications are available as discrete contacts, packaged in rugged reverse-bayonet ITH series connectors, or as turnkey inside-the-box or environmental cable assemblies, tested and ready for immediate use.




Available flop-lid protective cover

RadGrip rubber-covered coupling nuts available in a wide range of colors including safety red


## How to order - Super ITS-ITH Octobyte connectors

### SUPER ITS - ITH OCTOBYTE CONNECTORS

Precision machined connectors with 4/8 pole Octobyte contacts provide high-speed Ethernet connectivity for extreme environmental exposure and corrosion resistance typically needed in rail, mining, and other industrial applications. Convenient reverse bayonet mating provides easy intermateability while the locking three pin bayonet coupler prevents the connector from demating under high shock and high vibration conditions. Accessory thread for attachment of backshells and adapters.

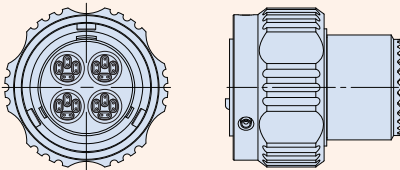

03 - Plug

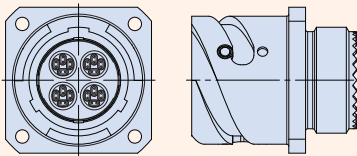

030 - Rear Panel Mount Wall Mount Receptacle

How To Order	
<b>Sample Part Number:</b>	<b>ITH 030 A 5C 32Q4 S B0 N0 F6</b>
<b>Series</b>	<b>ITH</b>
<b>Contact Size</b>	030 = Rear Panel Mount Wall Mount Receptacle 06 = Straight Plug
<b>Environmental</b>	A = Non environmental R = Environmental
<b>Number of Keys</b>	5C = 5 keys
<b>Insert Arrangements</b>	18-Q1, 32-Q4, 36-Q5, 40-Q7
<b>Contact Gender</b>	P = Pin contacts (male) S = Socket contacts (female)
<b>Connector less contact</b>	B0 = contact not supplied (order the contact separately)
<b>Accessory</b>	N0 = without Backshell. Please consult the factory
<b>Plating</b>	F6 = Electrodeposited black paint (cataphoresis), RoHS compliant F7 = Black Zinc Nickel, RoHS compliant

### FRONT VIEW RECEPTACLE CONNECTORS



18-Q1



32-Q4




36-Q5




40-Q7

## How to order - Super ITS-ITH Octobyte connectors

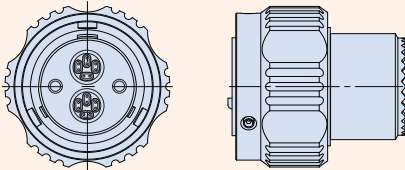

03 - Plug

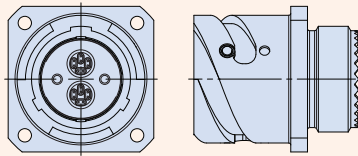

030 - Rear Panel Mount Wall Mount Receptacle

### SERIES ITS - ITH OCTOBYTE CONNECTORS

Precision machined connectors with 4/8 pole Octobyte, high-speed Ethernet contacts and power contacts provide both network connectivity and power distribution in one connector. Designed for extreme environmental exposure and corrosion resistance typically needed in rail, mining, and other industrial applications. Convenient reverse bayonet mating provides easy intermateability while the locking three pin bayonet coupler prevents the connector from demating under high shock and high vibration conditions. Accessory thread for attachment of backshells and adapters.

		How To Order								
Sample Part Number:		ITH	030	A	5C	28-OB4	S	B0	N0	F6
Series	ITH									
Contact Size	030 = Rear Panel Mount Wall Mount Receptacle 06 = Straight Plug									
Environmental	A = Non environmental R = Environmental									
Number of Keys	5C = 5 keys									
Insert Arrangements	28-OB4, 36-OB7									
Contact Gender	P = Pin contacts (male) S = Socket contacts (female)									
Connector less contact	B0 = contact not supplied (order the contact separately)									
Accessory	N0 = without Backshell. Please consult the factory									
Plating	F6 = Electrodeposited black paint (cataphoresis), RoHS compliant F7 = Black Zinc Nickel, RoHS compliant									

### FRONT VIEW PLUG CONNECTORS



**28-OB4**  
2 OCTOBYTE  
2 SIZE 8 CONTACTS



**36-OB7**  
3 OCTOBYTE  
4 SIZE 8 CONTACTS

RUGGEDIZED  
RJ45 / USB  
FIELD  
CONNECTORS



SuperSeal RJ45 and USB field connectors. Now available for USB SuperSpeed 3.0



Military-grade, ruggedized field connectors that deliver improved environmental sealing, EMI/RFI grounding, and a broader range of wire termination options for RJ45 and USB—now for SuperSpeed 3.0



Available ruggedized memory stick  
32GB, 64GB, and 128GB versions

- New SuperSpeed USB 3.0 protocol support
- Superior sealing—IP67 unmated—for complete system protection against water, sand and dust
- Highly durable SuperSeal™ insert design, provides enhanced operating temperature, increased life-cycle, and rugged vibration and shock performance
- Crimp, solder-cup, PC tail and cable assemblies

# SuperSeal High-Speed Ruggedized RJ45/USB connectors and cables



## SuperSpeed USB 3.0

### NEW SUPERSPEED USB 3.0 RUGGEDIZED FIELD CONNECTORS



Cable plug

Wall mount receptacle with metric clinch nuts

Wall mount receptacle with slotted holes

Wall mount receptacle with round holes

Jam nut mount Receptacle

### TURNKEY SUPERSPEED USB 3.0 CABLE ASSEMBLIES AND JUMPERS



#### Glenair SuperNine USB 3.0 cable jumpers, SuperSeal to standard USB Type A and Micro-B connectors

SuperSeal USB 3.0 connectors are available as turnkey cable jumpers. Rugged field connector styles—including plug, wall mount and jam-nut receptacles—may be cabled with commercial 3.0 connector types including male Type A, female Type A, and male Micro B. Assemblies may be ordered with straight or right angle cable exit. In addition, the USB 3.0 insert may be ordered in horizontal or vertical orientation to provide protection against mis-mating. Maximum overall length is 15 feet.

### SUPPORTED USB 3.0 CONNECTOR TYPES




USB 3.0 male Type A

USB 3.0 female Type A

USB 3.0 male Micro B

### USB ORIENTATION OPTIONS

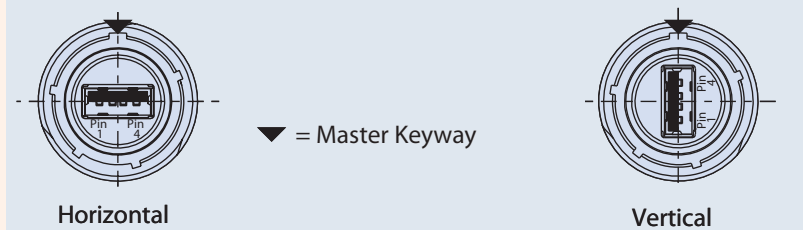

Horizontal

Vertical

# SuperSeal High-Speed Ruggedized RJ45/USB connectors and cables

Available connector packaging



## AVAILABLE TERMINATION OPTIONS



Solder Cup



PC tail



Crimp Contact



Jack-to-Jack



EMI Filtered



Quadrax



MIL-STD-1560 Arrangements



Turnkey Cordsets



**SuperSeal™ MIL-DTL-38999 Series III Type RJ45 Connectors and Cordsets plus NEW Transient Voltage Suppression Solutions**



**SuperSeal™ MIL-DTL-Series 39999 Series III Type USB 2.0 Connectors and Cordsets**



**ITS SuperSeal™ (5015 Intermountable) Reverse-Bayonet RJ45 Connectors**



**ITS SuperSeal™ (5015 Intermountable) Reverse-Bayonet USB 2.0 Connectors**

# SuperSeal High-Speed Ruggedized RJ45/USB connectors and cables



Available connector packaging



**IPT SuperSeal™ MIL-DTL-26482 Type Bayonet RJ45 Connectors**



**IPT SuperSeal™ MIL-DTL-26482 Type Bayonet USB Connectors**



**SuperSeal™ MIL-DTL-28840 Type RJ12/RJ45 and USB Shipboard Connectors**



**SuperSeal™ Series 801, 804 and 805 Mighty Mouse Micro USB 2.0 Connectors**



**SuperSeal™ Series 801, 804 and 805 Mighty Mouse RJ45 Connectors**



**SuperSeal™ Series 801, 804 and 805 Mighty Mouse Standard USB 2.0 Connectors**

HIGH-SPEED  
VERSALINK™  
DIFFERENTIAL  
TWINAX



Ultra Miniature Micro-D  
Connectors with High-  
Speed VersaLink  
Contact Technology



## Innovative differential Twinax contact technology in ruggedized, high-density mil-spec connector packaging

High-speed serial data protocols (USB 3.1 Gen2, USB-C, SATA, PCIe, DisplayPort, and HDMI) all have transmission rates in the 10Gb/s+ range for each data pair. In order to provide truly high-speed signal integrity for these bandwidth-dependent protocols, Glenair has invented a new contact technology called VersaLink™ which delivers outstanding impedance matching and cross-talk isolation at both the cable-to-connector interface, as well as between connector and board. VersaLink is a highly-engineered differential Twinax contact module that may be packaged in a wide range of both circular and rectangular connector formats such as the MIL-DTL-83513 Micro-D. This high-density package solution provides mating reliability, ruggedness, signal integrity, and deployment simplicity.

Data-intensive servers, computers and peripheral devices in mission-critical applications require a new generation of shielded contact technology and tried-and-true connector package performance. Both are exquisitely realized in the VersaLink Micro-D.


- VersaLink: shielded differential Twinax interconnect solution
- Signature Glenair design intermountable in standard Micro-D footprints
- Higher speed and density than mil-spec style Twinax solutions
- Individually shielded pairs result in virtually zero cross talk
- Hybrid arrangements with VersaLink contact modules and standard Micro-D inserts for signal and power

# HIGH-SPEED VersaLink™ Micro-D




## Military-standard Micro-D connectors with “zero crosstalk” VersaLink™ Twinax contact modules

### CONNECTOR CONFIGURATIONS

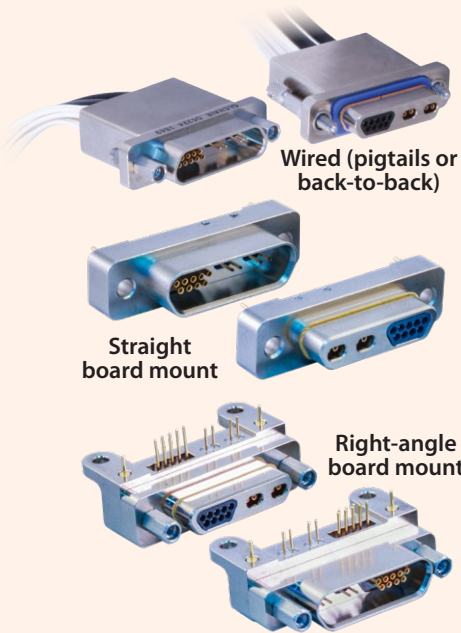


### EMI SHIELDING AND ENVIRONMENTAL SEALING

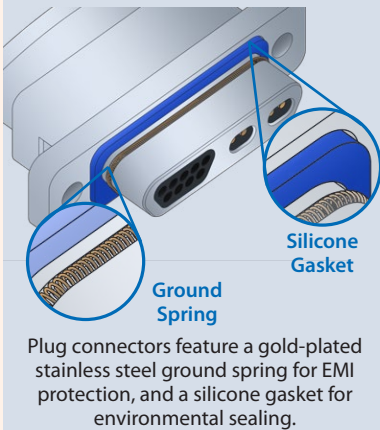

### SUPPORTED HIGH-SPEED PROTOCOLS AND APPLICATIONS

Networking Protocols	Peripheral and Display Protocols	
10Gb Ethernet 40Gb Ethernet	DVI (Digital Visual Interface) HDMI 2.0 (High-Definition Multimedia Interface) DisplayPort 1.2 SATA 3 (Serial AT Attachment)	USB 3.0 (Universal Serial Bus) USB 3.1 Type C (Universal Serial Bus) USB 3.2 (Universal Serial Bus) PCIe 3 (Peripheral Component Interconnect)

### CONTACT ARRANGEMENTS

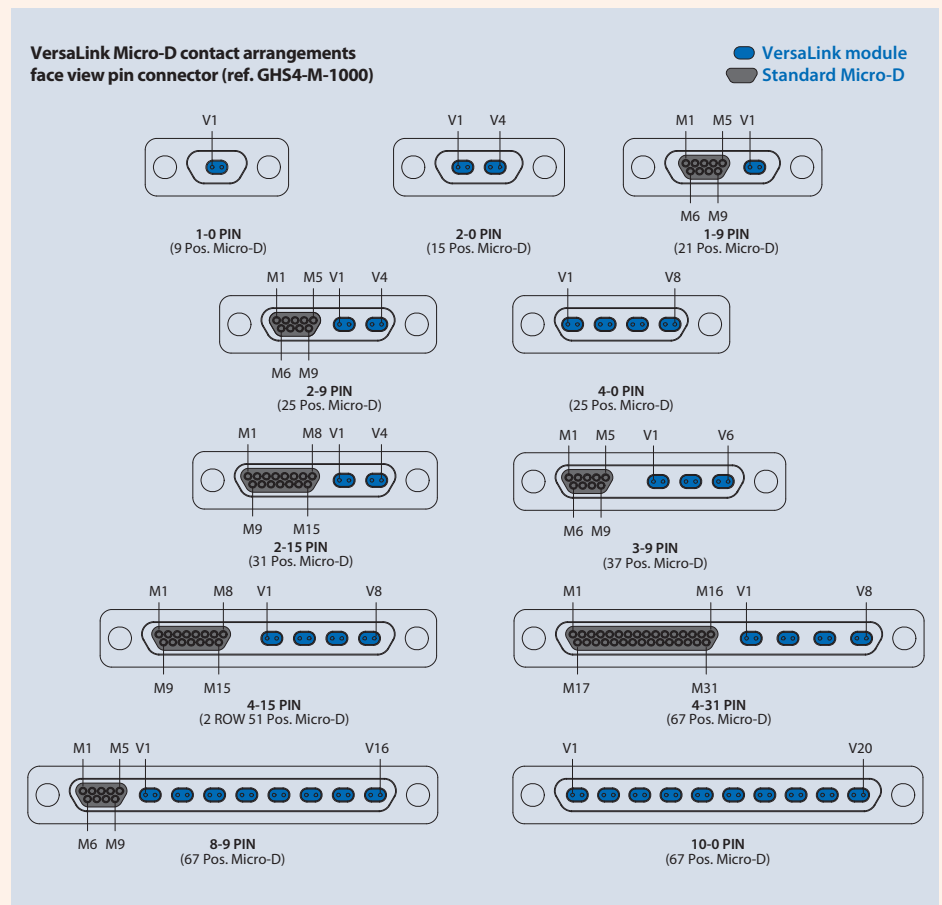

### MATERIALS AND FINISHES

Connector Shell: Aluminum Alloy 6061  
 Insulator (V): Rigid Dielectric. Insulator (M): Liquid Crystal Polymer (LCP) or Polyphenylene Sulfide (PPS)  
 Flange Seal: Fluorosilicone Rubber, Blue  
 Pin Contact: Copper Alloy, Gold over Nickel Plating  
 Socket Contact: Copper Alloy, Gold over Nickel Plating  
 Ground Spring: Stainless Steel, Gold Plating  
 Ground Pin: Copper Alloy, Gold Over Nickel Plating  
 Hardware: 300 Series Stainless Steel, Passivated  
 Encapsulant: Epoxy Resin Hysol EE4215

### PERFORMANCE SPECIFICATIONS


Current Rating: 3 Amp (Micro-D pins)  
 DWV (Contact M): 600 VAC Sea Level  
 Insulation Resistance (Contact M): 5000 Megohms Minimum  
 Contact Resistance (Contact M): 8 Milliohms Maximum  
 Low Level Contact Resistance: 32 Milliohms Maximum  
 Operating Temperature: -55°C To 125°C  
 Mating Force (Contact M): (10 Ounces) X (# Of Contacts)  
 Mating Force (Contact V): (5 Ounces) X (# Of Contacts)

# HIGH-SPEED VersaLink™ Micro-D



## How-to-order Wired connectors

How To Order VersaLink Micro-D Wired Connectors	
<b>Sample Part Number</b>	<b>GHS4-M 2 L- 2-9 P A 6 J I -18 K N</b>
<b>Series</b>	<b>GHS4-M</b> = Glenair VersaLink Micro-D
<b>Shell Finish</b>	<b>2</b> = Nickel <b>5</b> = Gold
<b>Insulator Material</b>	<b>L</b> = LCP or PPS
<b>Contact Layout (V-M)</b>	<b>1-0, 2-0, 1-9, 2-9, 4-0, 2-15, 3-9, 4-15, 4-31, 8-9, 10-0</b>
<b>Contact Type<sup>1</sup></b>	<b>P</b> = Pin (Single-End Plug) <b>S</b> = Socket (Single-End Receptacle) <b>GP</b> = Double-End Cable, Pin Connectors Both Ends <b>GS</b> = Double-End Cable, Socket Connectors Both Ends <b>CS</b> = Double-End Cable, Pin and Socket [designation is for Micro-D contacts, see note 1 below]
<b>VersaLink Cable Type</b>	<b>A</b> = Glenair Cable 963-043-26 (100 Ohm, +105°C Max)
<b>Discrete Wire Gage (AWG)<sup>2</sup></b>	<b>4</b> = #24 <b>6</b> = #26 <b>8</b> = #28 <b>0</b> = #30 (J Wire Type Only)
<b>Discrete Wire Type<sup>2</sup></b>	<b>K</b> = M22759/11 600 VRMS Teflon (TFE) <b>J</b> = M22759-33 600 VRMS Modified Cross-Linked Tefzel (ETFE) <b>E</b> = NEMA HP3-EB 600 VRMS Type E M16878/4 (TFE)
<b>Discrete Wire Color<sup>2</sup></b>	<b>1</b> = White <b>5</b> = Color-Coded Stripes per MIL-STD-681 <b>7</b> = Ten Color Repeating
<b>Wire Length</b>	Wire Length in Inches, 6 Inch Minimum
<b>Hardware<sup>3</sup></b>	<b>P, M, M1, S, S1, L, K</b> (See Mounting Hardware Designations table below)
<b>Shield and Jacket Option</b>	<b>X</b> - ArmorLite Braided Microfilament Stainless Steel shield with E-CTFE Halar "Expando" Jacket <b>W</b> - ArmorLite Braided Microfilament Stainless Steel shield <b>Z</b> - 75% Braided AmberStrand shield with E-CTFE Halar "Expando" Jacket <b>V</b> - 75% Braided AmberStrand shield <b>T</b> - 100% Braided AmberStrand shield with E-CTFE Halar "Expando" Jacket <b>S</b> - 100% Braided AmberStrand shield <b>C</b> - Braided shield (Nickel Over Copper) with E-CTFE Halar "Expando" Jacket <b>A</b> - Braided shield (Nickel over Copper) <b>N</b> - No Shield, No Jacket (customer to install)
<p>1 - Plug connector uses Pin Micro-D contacts and Socket VersaLink contacts. Receptacle uses Socket Micro-D contacts and Pin VersaLink contacts. GP and GS cable ends rotated 180° out of phase due to connector symmetry.</p> <p>2 - Omit wire information for VersaLink-only contact layouts (1-0, 2-0, 4-0, 10-0)</p> <p>3 - Hardware is always required to ensure connector pair is fully mated when installed</p>	

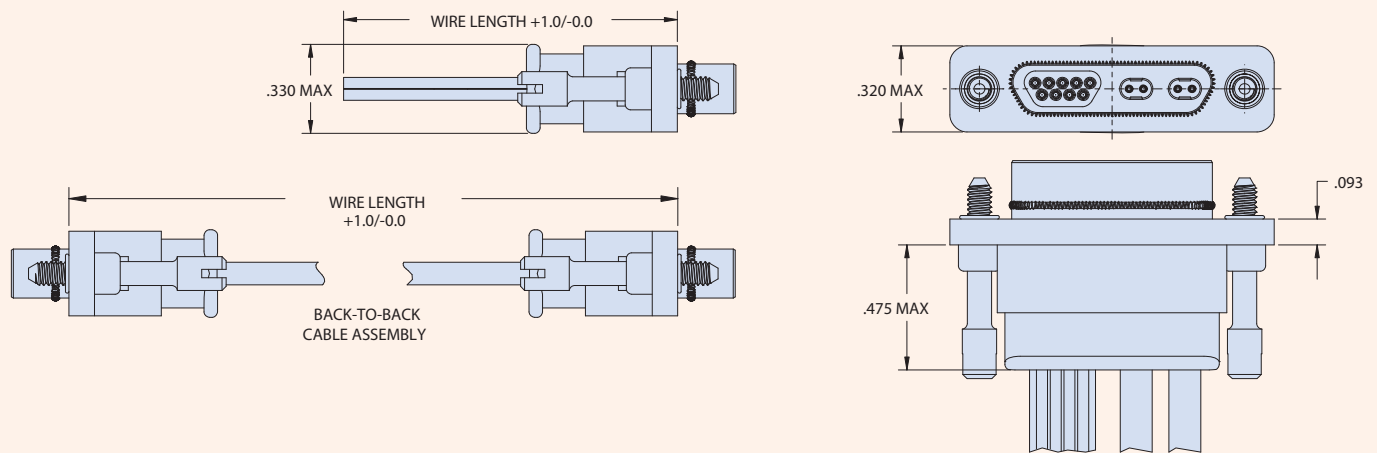


Mounting Hardware Designations						
<b>P</b> Jackpost	<b>M</b> Hex Head Jackscrew	<b>M1</b> Hex Head Jackscrew, Extended	<b>S</b> Slot Head Jackscrew	<b>S1</b> Slot Head Jackscrew, Extended	<b>L</b> Hex Head Jackscrew, Non- Removable	<b>K</b> Slot Head Jackscrew, Non- Removable Extended

## How-to-order PCB connectors, straight and right-angle

### How To Order VersaLink Micro- D Straight Board-Mount Connectors

Sample Part Number	GVLM	2	L-	2-9	P	BS	PN	-110
<b>Series</b>	GVLM = Glenair VersaLink Micro-D							
<b>Shell Finish</b>	2 = Nickel 5 = Gold							
<b>Insulator Material</b>	L = LCP or PPS							
<b>Contact Layout (V-M)</b>	1-0, 2-0, 1-9, 2-9, 4-0, 2-15, 3-9, 4-15, 4-31, 8-9, 10-0							
<b>Contact Type<sup>1</sup></b>	P = Pin (Plug) S = Socket (Receptacle) [designation is for Micro-D contacts, see note 1 below]							
<b>Termination Type</b>	BS = Board Straight							
<b>Hardware<sup>2</sup></b>	PN = Extended Jackpost with Hex Nut and Lockwasher							
<b>PC Tail Length<sup>3</sup></b>	-.080, -.110, -.140 (Length in Inches ±.015)							


1 - Plug connector uses Pin Micro-D contacts and Socket VersaLink contacts. Receptacle uses Socket Micro-D contacts and Pin VersaLink contacts  
 2 - Hardware is always required to ensure connector pair is fully mated when installed 3 - PC Tails solder-dipped in 60/40 Tin-Lead solder

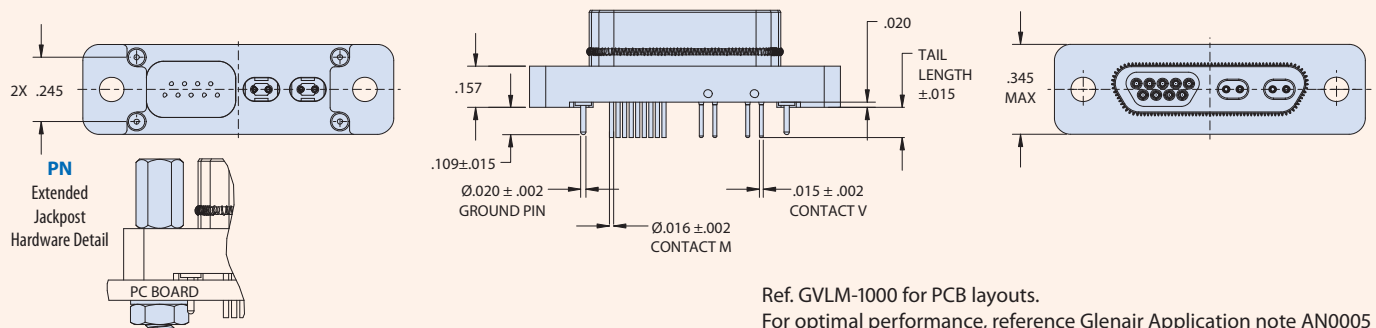

### How To Order VersaLink Micro-D Right-Angle Board-Mount Connectors

Sample Part Number	GVLM	2	L-	2-9	P	BR	P	T	-110
<b>Series</b>	GVLM = Glenair VersaLink Micro-D								
<b>Shell Finish</b>	2 = Nickel 5 = Gold								
<b>Insulator Material</b>	L = LCP or PPS								
<b>Contact Layout (V-M)</b>	1-0, 2-0, 1-9, 2-9, 4-0, 2-15, 3-9, 4-15, 4-31, 8-9, 10-0								
<b>Contact Type<sup>1</sup></b>	P = Pin (Plug) S = Socket (Receptacle) [designation is for Micro-D contacts, see note 1 below]								
<b>Termination Type</b>	BR = Board Right Angle								
<b>Hardware<sup>2</sup></b>	P = Jackpost								
<b>Threaded Insert Option</b>	T = Threaded Insert in Board-Mount Hole Omit for Through-Hole								
<b>PC Tail Length<sup>3</sup></b>	.080, .110, .140 (Length in Inches ±.015)								


1 - Plug connector uses Pin Micro-D contacts and Socket VersaLink contacts. Receptacle uses Socket Micro-D contacts and Pin VersaLink contacts  
 2 - Hardware is always required to ensure connector pair is fully mated when installed  
 3 - PC Tails solder-dipped in 60/40 Tin-Lead solder

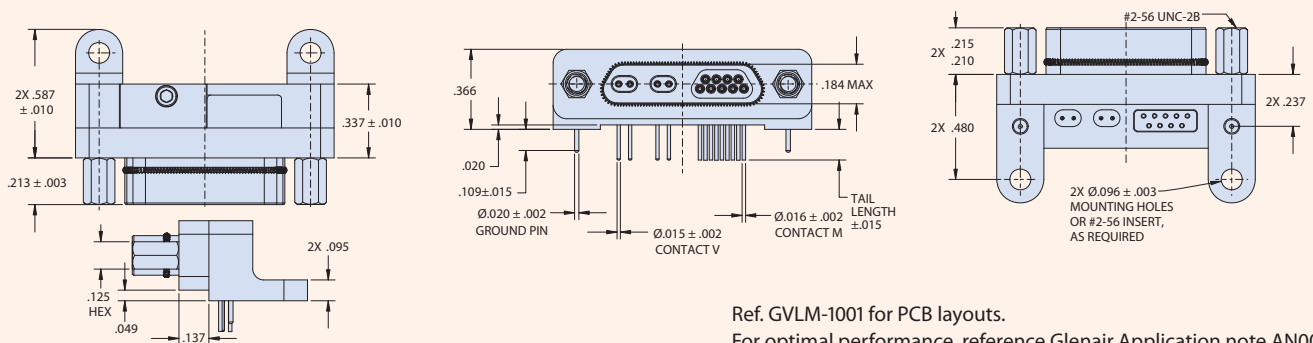

HIGH-SPEED  
VERSALINK™  
DIFFERENTIAL  
TWINAX BYPASS  
JUMPERS



VersaLink Bridge: 100 Ohm connectors and jumpers for high-speed board applications

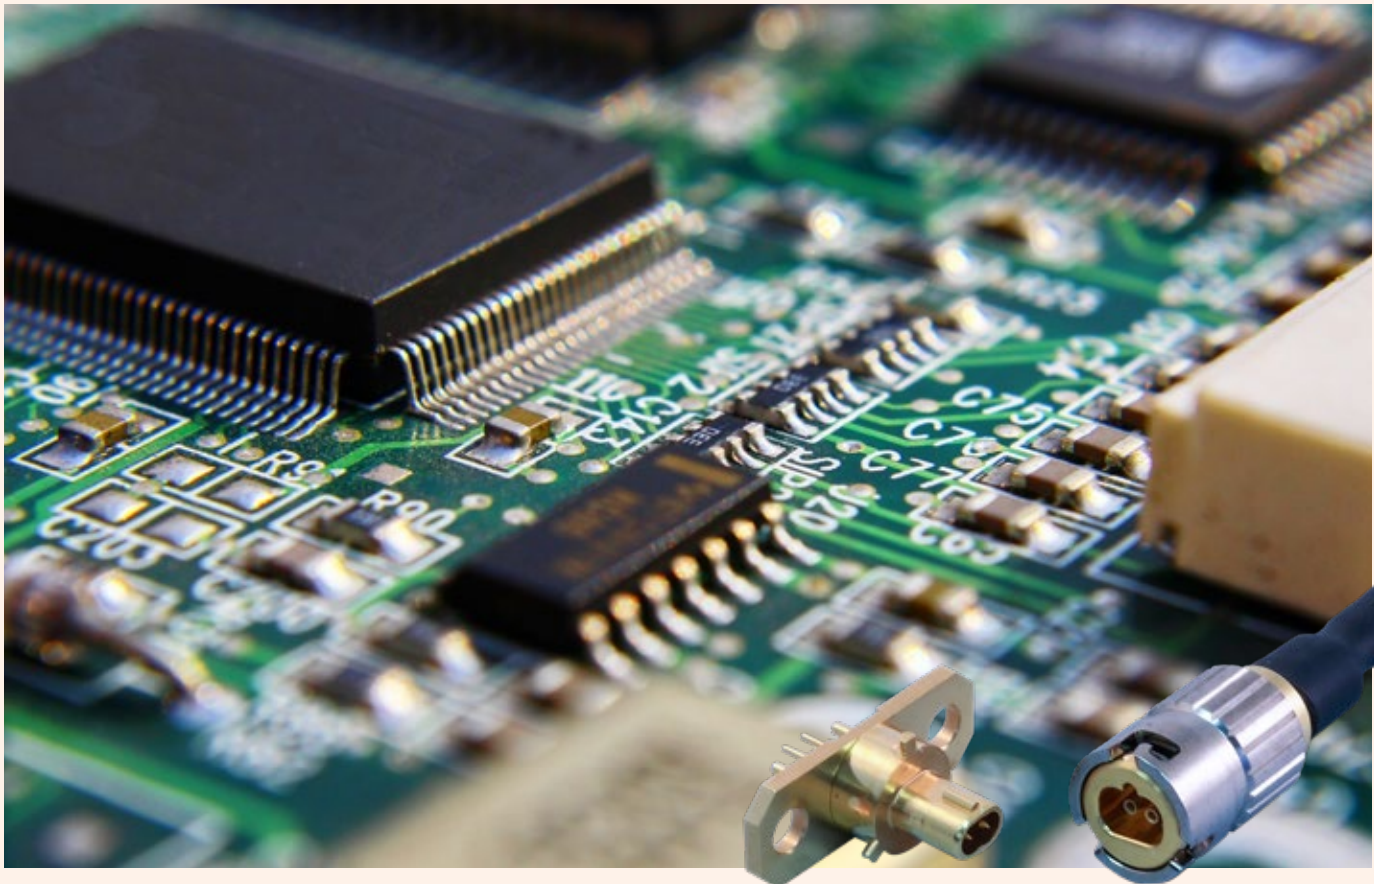

## VersaLink Bridge: bypass high-loss board traces with a low insertion-loss and low signal-latency point-to-point Twinax jumper

High-speed data transmission from one PCB to another, from one side of a backplane to another, or even from one side of a complex embedded system to another, is frequently accomplished by routing high-speed traces on a dedicated high-speed signal layer. This is a complex assignment—fraught with potential for impedance discontinuities and unacceptable insertion loss—as traces must navigate difficult and/or long routing paths around via columns and other board irregularities. The Glenair VersaLink Bridge is a high-density, micro-form factor twinax connector / jumper assembly used to bridge the gap between point A and point B on the board (such as between two SML integrated circuit chips) with better signal integrity than native board traces can ever deliver. VersaLink Bridge is equally capable of dramatically reducing insertion loss and signal latencies for data traffic between an ASIC and the I/O.

Right-angle bayonet-lock version for high shock and vibrate applications

### VERSALINK BRIDGE FEATURES

- Small footprint, high-density solution
- Versatile solder-mount or screw-mount board termination
- 100 Ohm differential Twinax
- Push-pull mating or bayonet-lock for high vibration and shock applications
- Keyed polarization prevents mis-mating
- Low insertion loss and low signal latencies for high data rate board transmissions

# HIGH-SPEED VersaLink™ Bridge



## Differential Twinax “bypass” connector and jumper assemblies

### AVAILABLE CONFIGURATIONS: QUICK-DISCONNECT

Quick-disconnect plug	QDC Jack board pin straight screw mount	QDC Jack board pin straight solder mount	QDC Jack board pin right-angle screw mount	QDC Jack board pin right-angle solder mount

### AVAILABLE CONFIGURATIONS: BAYONET-LOCK

Bayonet-lock plug	Bayonet-lock Jack board pin straight screw mount	Bayonet-lock Jack board pin straight screw mount

Recommended Cable for Plug Connectors				
Cable P/N	Cable Construction	Wire Gauge	Impedance	Max. Overall Size
963-043-26	Twinax In-Line	26	100 Ω	.121" X .076"


### MATERIALS AND FINISHES

Contacts: Copper alloy / gold  
 Insulators: Superior rigid dielectric  
 Body: Copper alloy / gold  
 Ferrules (plugs): Copper alloy / electroless nickel  
 Spring (plugs): Music wire

### ELECTRICAL PARAMETERS

(for Board Connectors)

Impedance: 100 Ohms  
 DWV: 500 RMS  
 IR: 5000 Megaohms min. at 200 VDC

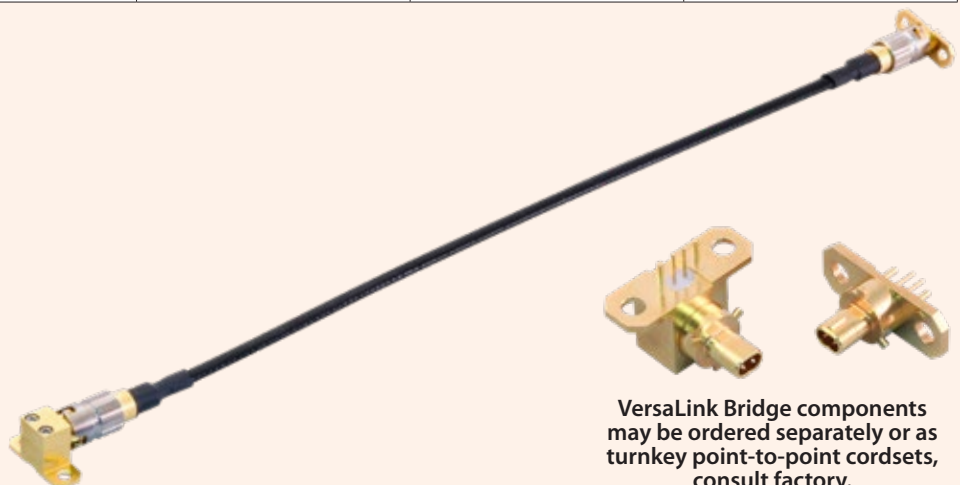

VersaLink Bridge components may be ordered separately or as turnkey point-to-point cordsets, consult factory.


# HIGH-SPEED VersaLink™ Bridge

## QDC Differential Twinax “bypass” connectors How-to-order






### How To Order VersaLink Bridge Quick-Disconnect Plug Connectors

<b>Sample Part Number</b>	<b>853-051</b>
<b>Series</b>	<b>853-051</b> VersaLink Bridge Plug socket QDC connectors

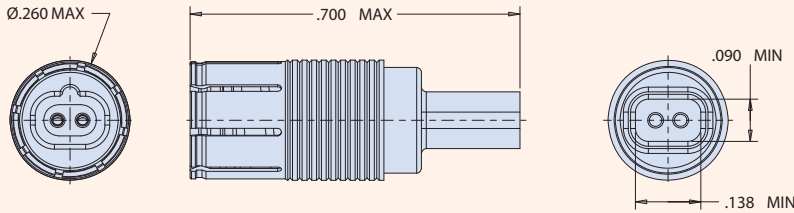


### How To Order VersaLink Bridge Quick-Disconnect Straight Board Connectors

<b>Sample Part Number</b>	<b>853-052</b> -1 <b>G</b> -.140
<b>Series</b>	<b>853-052</b> VersaLink Bridge straight board pin QDC connectors
<b>Mounting Style</b>	<b>1</b> = Solder Mount <b>2</b> = Screw Mount
<b>PC Tail Finish</b>	<b>S</b> = Solder dipped in 63/37 Tin/Lead <b>G</b> = Gold Plated
<b>PC Tail Length</b>	<b>-.140, -.110, -.080</b> (length in inches)





SOLDER MOUNT

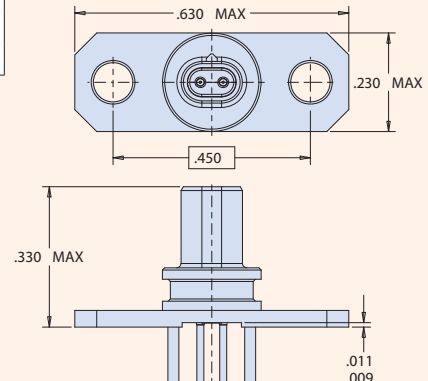


SCREW MOUNT

### How To Order VersaLink Bridge Quick-Disconnect Right-Angle Board Connectors

<b>Sample Part Number</b>	<b>853-054</b> -1 <b>G</b> -.140
<b>Series</b>	<b>853-054</b> VersaLink Bridge Right-angle board pin QDC connectors
<b>Mounting Style</b>	<b>1</b> = Solder Mount <b>2</b> = Screw Mount
<b>PC Tail Finish</b>	<b>S</b> = Solder dipped in 63/37 Tin/Lead <b>G</b> = Gold Plated
<b>PC Tail Length</b>	<b>-.140, -.110, -.080</b> (length in inches)

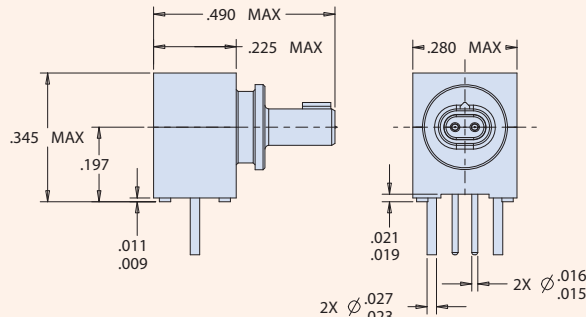

SOLDER MOUNT

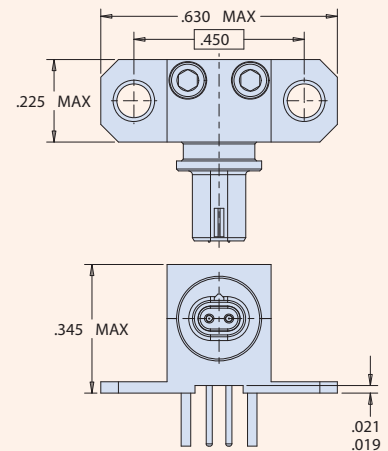

SCREW MOUNT


# HIGH-SPEED VersaLink™ Bridge



## Bayonet-Lock Differential Twinax “bypass” connectors How-to-order



### How To Order VersaLink Bridge Bayonet-Lock Plug Connectors

<b>Sample Part Number</b>	<b>853-064</b>
<b>Series</b>	<b>853-064</b> VersaLink Bridge Plug socket bayonet connectors

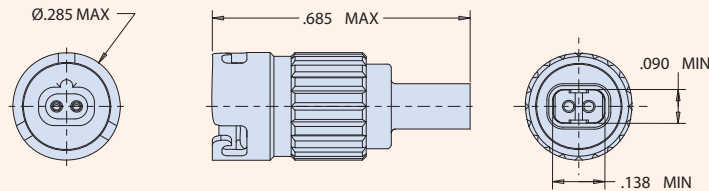



### How To Order VersaLink Bridge Bayonet-Lock Straight Board Connectors

<b>Sample Part Number</b>	<b>853-065</b>	<b>G</b>	<b>-.140</b>
<b>Series</b>	<b>853-065</b> VersaLink Bridge Bayonet-lock straight board pin connector		
<b>PC Tail Finish</b>	<b>S</b> = Solder dipped in 63/37 Tin/Lead <b>G</b> = Gold Plated		
<b>PC Tail Length</b>	<b>-.140, -.110, -.080</b> (length in inches)		

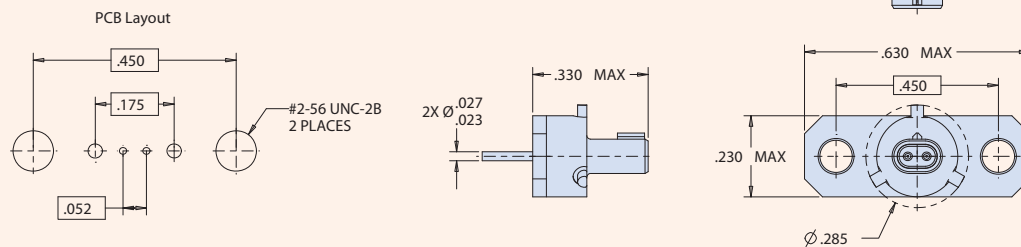

### How To Order VersaLink Bridge Bayonet-Lock Right-Angle Board Connectors

<b>Sample Part Number</b>	<b>853-067</b>	<b>G</b>	<b>-.140</b>
<b>Series</b>	<b>853-067</b> VersaLink Bridge Bayonet-lock right-angle board pin connector		
<b>PC Tail Finish</b>	<b>S</b> = Solder dipped in 63/37 Tin/Lead <b>G</b> = Gold Plated		
<b>PC Tail Length</b>	<b>-.140, -.110, -.080</b> (length in inches)		

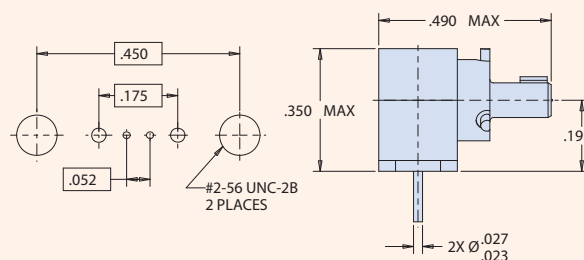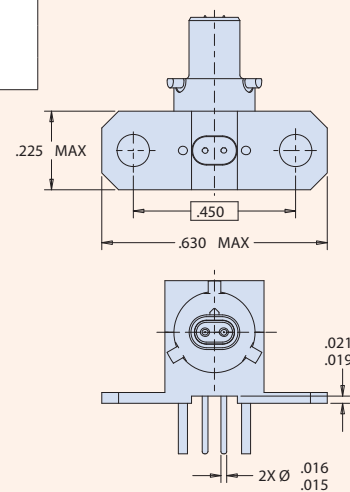

HIGH-SPEED  
MICRO-D



Smallest and lightest  
aerospace-grade  
high-speed  
connector solution



## Miniaturized Micro-D Connector / TwistPin contact solution with 10+ Gb/sec. performance per differential pair

High-speed datalink applications such as aircraft avionics and other high data rate and bandwidth equipment require both optimized data transmission performance as well as robust mechanical and EMC performance. Micro-D connector packaging with high-retention-force TwistPin contacts has a proven track record in standard signal and power applications. Now Glenair has developed a Micro-D solution—intermountable in existing Micro-D panel cutouts—that brings high-speed datalink performance to these mission-critical platforms. The High-Speed Micro-D is a 1 Amp pre-wired cable and PCB solution with 10+ Gb/sec. performance per differential pair. Auxiliary EMC ground springs on plug and integral contact separation architecture ensures data integrity and low attenuation performance.

High-Speed Micro-D connectors and cables are optimized for high-speed digital datalink protocols with machined-shell packaging, low attenuation contact spacing, and ultra low PPS dielectric insulators.



- Pre-wired factory cordsets and PCB connectors
- Unique contact isolation and spacing for optimal high-speed performance
- Standard layouts support maximum #28 AWG wire
- Ultra-low dielectric material combined with optimized contact size and spacing
- Precision-machined shells with gold or nickel plating
- Hybrid contact solutions available with 3 amp and 1 amp TwistPin contacts (perfect for USB 3.0 SuperSpeed applications)

# HIGH-SPEED Micro-D



The miniature high-speed connector with mil-spec pedigree connector and contact packaging

## SUPPORTED HIGH-SPEED PROTOCOLS


Shell Sizes and contact arrangements optimized for today's popular high-speed protocols



21	21	25	21
Display Port 1.2	HDMI 2.0	DVI-D Dual	DVI-D Single
9	15	9	15
eSATA/SATA 3	USB 3.0	USB 2.0	Up To: Cat 6A (10GBASE-T)

Micro-D High-Speed configurations include wired assemblies and straight or 90° PCB-mount connectors. Insert arrangements feature 1 Amp Nanominiature TwistPin contacts. Hybrid 1Amp/3Amp arrangements for USB 3.0 SuperSpeed are also available. All designs have been tested for today's popular high-speed protocols.


## EMI SHIELDING AND ENVIRONMENTAL SEALING

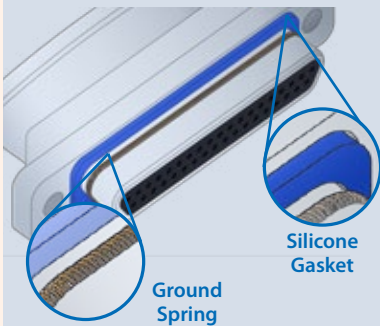

Plug connectors feature a gold-plated stainless steel ground spring for EMI protection, and a silicone gasket for environmental sealing.

## High-Speed Micro-D contact arrangements face view pin connector

- high-speed signal pair
- signal-pair drain wire
- low-speed signal or power contacts

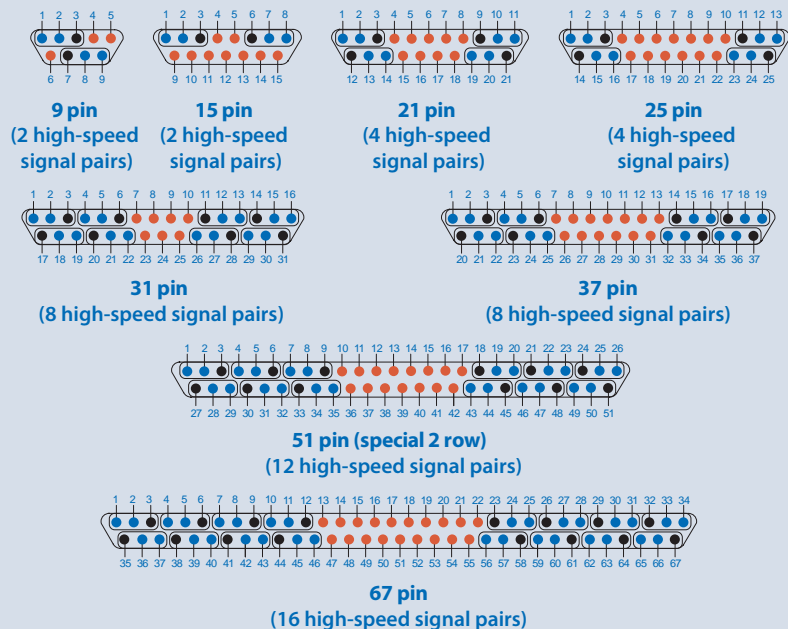

## MATERIALS AND FINISHES

Connector Shell: Aluminum Alloy 6061  
 Insulator: Polyphenylene Sulfide (PPS)  
 Flange Seal: Fluorosilicone Rubber, Blue  
 Pin Contact: Copper Alloy, Gold over Nickel Plating  
 Socket Contact: Copper Alloy, Gold over Nickel Plating  
 Ground Spring: Stainless Steel, Gold Plating  
 Hardware: 300 Series Stainless Steel, Passivated  
 Epoxy Resin Hysol EE4215 and Stycast 2850FT/Catalyst 11

\*Contact factory for custom configurations supporting up to 3 Amps.

\*\*Add (10 Ounces) X (# of 3 Amp Contacts) for mating force for configurations with 3 Amp contacts

## PERFORMANCE SPECIFICATIONS



Current Rating: 1 Amp\*  
 DWV: 600 VAC Sea Level  
 Insulation Resistance: 5000 Megohms Minimum (500 VDC)  
 Contact Resistance: 80 Milliohms Maximum  
 Operating Temperature: -55°C To 125°C  
 Mating Force: (7 Ounces) X (# of 1 Amp Contacts)\*\*  
 Durability: 500 Mating Cycles



# How-to-order GHSM Shielded Cable Assembly Connectors

How To Order High-Speed Micro-D Wired Connectors	
<b>Sample Part Number</b>	<b>GHSM 2 R -31 P -A 8 J 1 -18 L A</b>
<b>Series</b>	GHSM = Glenair High-Speed Micro-D
<b>Shell Finish</b>	2 = Nickel 5 = Gold
<b>Insulator Material</b>	R = PPS
<b>Contact Layout</b>	9, 15, 21, 25, 31, 37, 51-2, 67
<b>Contact Type</b>	P = Pin (Single-End Plug) S = Socket (Single-End Receptacle) GP = Double-End Cable, Pin Connectors Both Ends GS = Double-End Cable, Socket Connectors Both Ends CS = Double-End Cable, Pin and Socket
<b>High Speed Cable Type</b>	A = Glenair Cable 963-128-28 (100 Ohm) B = Glenair Cable 963-130-28 (90 Ohm)
<b>Discrete Wire Gage (AWG)</b>	8 = #28 0 = #30 (J Wire Type only)
<b>Discrete Wire Type</b>	K = M22759/11 600 VRMS Teflon (TFE) J = M22759/33 600 VRMS Modified Cross-Linked Tefzel (ETFE)
<b>Discrete Wire Color</b>	1 = White 7 = Ten Color Repeating
<b>Wire Length</b>	Wire Length in Inches, 6 Inch Minimum
<b>Mounting Hardware<sup>1</sup></b>	L, M, P, S, (See Mounting Hardware Designations table below)
<b>Shield and Jacket Option</b>	X - ArmorLite Braided Microfilament Stainless Steel shield with E-CTFE Halar "Expando" Jacket W - ArmorLite Braided Microfilament Stainless Steel shield Z - 75% Braided AmberStrand shield with E-CTFE Halar "Expando" Jacket V - 75% Braided AmberStrand shield T - 100% Braided AmberStrand shield with E-CTFE Halar "Expando" Jacket S - 100% Braided AmberStrand shield C - Braided shield (Nickel Over Copper) with E-CTFE Halar "Expando" Jacket A - Braided shield (Nickel over Copper) N - No Shield, No Jacket (customer to install)



1 - Hardware is always required to ensure connector pair is fully mated when installed

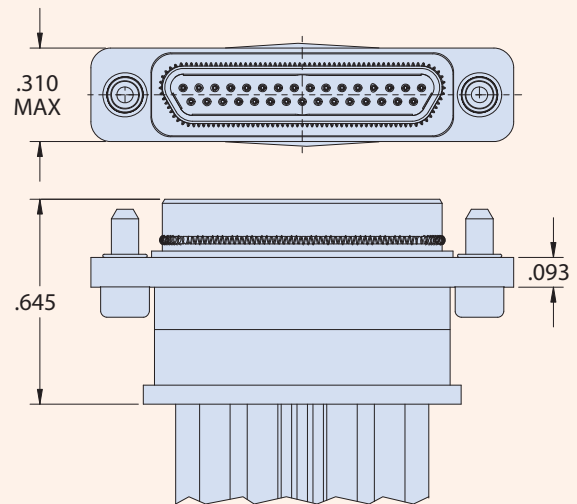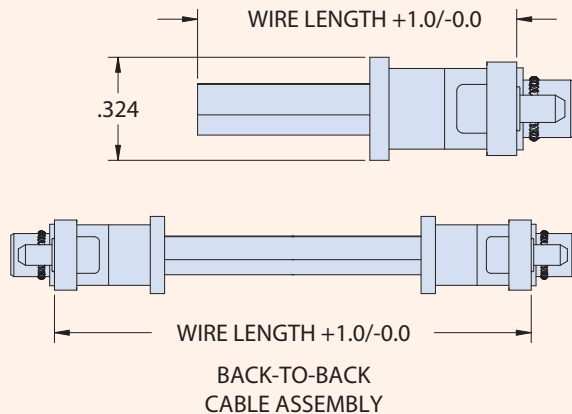

Mounting Hardware Designations			
<b>P</b> Jackpost	<b>M</b> Hex Head Jackscrew	<b>S</b> Slot Head Jackscrew	<b>L</b> Hex Head Jackscrew, Non-Removable

## How-to-order GHSM-BSS Board Straight Surface Mount Connectors

How To Order High-Speed Micro-D Board Straight Surface Mount Connectors	
<b>Sample Part Number</b>	<b>GHSM 2 R -25 S BSS PU</b>
<b>Series</b>	GHSM = Glenair High-Speed Micro-D
<b>Shell Finish</b>	2 = Nickel 5 = Gold
<b>Insulator Material</b>	R = PPS
<b>Contact Layout</b>	9, 15, 21, 25, 31, 37, 51-2, 67
<b>Contact Type</b>	P = Pin (Plug) S = Socket (Receptacle)
<b>Termination Type</b>	BSS = Board Straight Surface Mount
<b>Jackpost Option</b> (see table below)	PN = Extended Jackpost for .062" PCB RN = Extended Jackpost for .196" PCB PU = Short Jackpost and Threaded Insert Rear Panel Jackpost with Threaded Insert R1 = .032" Panel R2 = .047" Panel R3 = .062" Panel R4 = .093" Panel R5 = .125" Panel R6 = .080" Panel

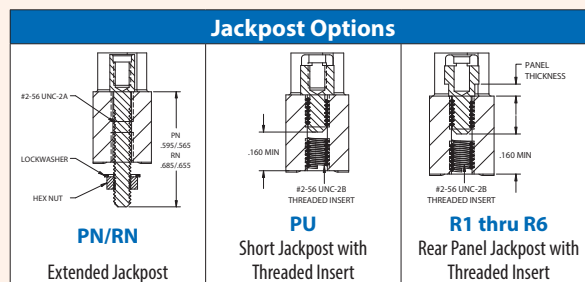
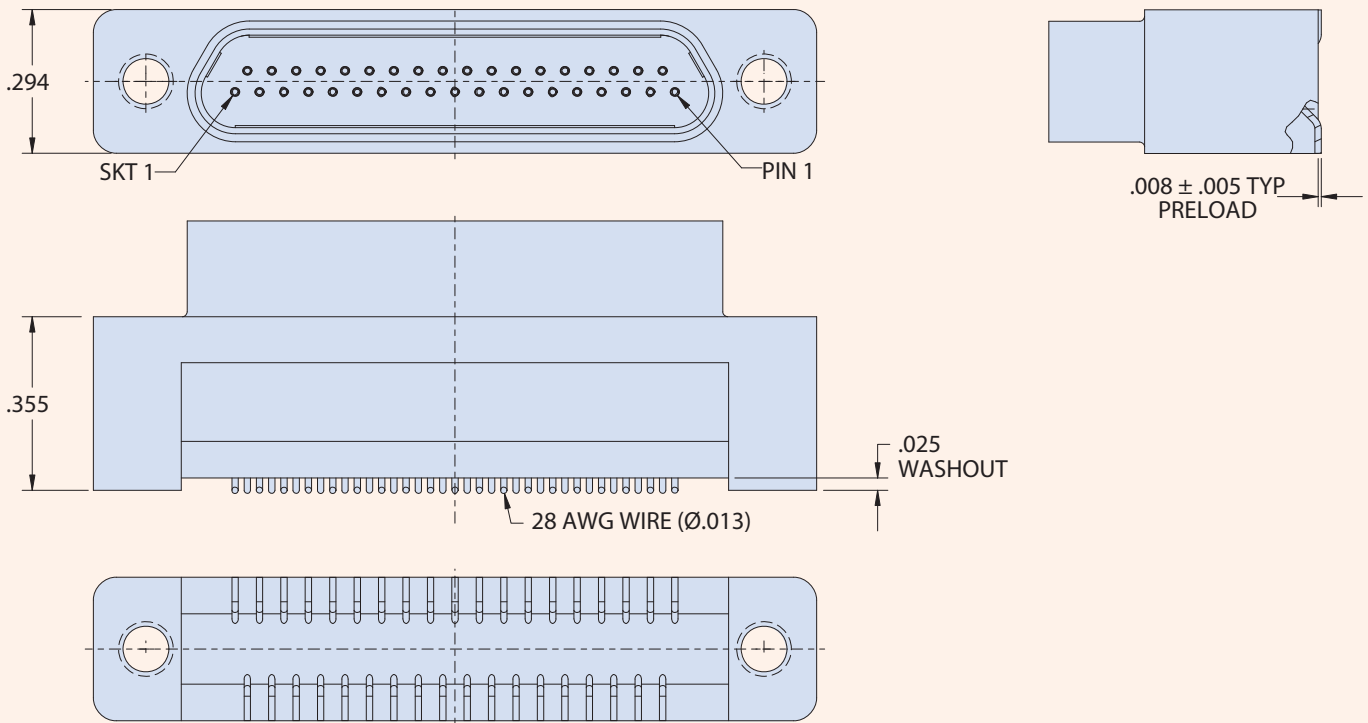


# HIGH-SPEED Micro-D






## How-to-order GHSM-HBR Hybrid Board Right-Angle connectors

How To Order High-Speed Micro-D Hybrid Board Right Angle Connectors										
<b>Sample Part Number</b>	<b>GHSM</b>	<b>2</b>	<b>R</b>	<b>-25</b>	<b>S</b>	<b>HBR</b>	<b>P</b>	<b>T</b>	<b>-110</b>	
<b>Series</b>	GHSM = Glenair High-Speed Micro-D									
<b>Shell Finish</b>	2 = Nickel 5 = Gold									
<b>Insulator Material</b>	R = PPS									
<b>Contact Layout</b>	9, 15, 21, 25, 31, 37, 51-2, 67									
<b>Contact Type</b>	P = Pin (Plug) S = Socket (Receptacle)									
<b>Termination Type</b>	HBR = Hybrid Board Right Angle									
<b>Jackpost Option (see table below)</b>	P = Jackpost		Jackposts for Rear Panel Mounting							
	L = Hex Head Jackscrew (non-removable)		R1 = .032" Panel	R2 = .047" Panel	R3 = .062" Panel	R4 = .093" Panel	R5 = .125" Panel	R6 = .080" Panel		
<b>Threaded Insert Option</b>	T = Threaded Insert in Board Mounting Hole Omit for Thru-Hole									
<b>Right-Angle Lead Length</b>	-.080, -.110, -.140, -.172 (Length in Inches ±.015)									

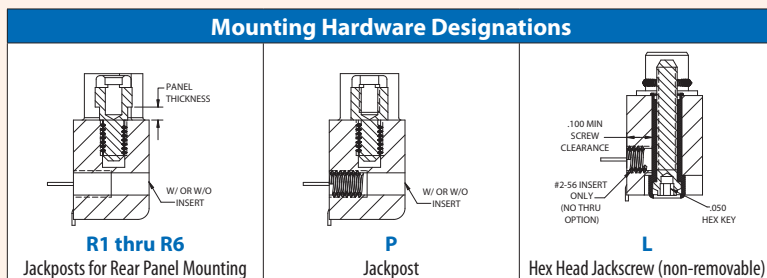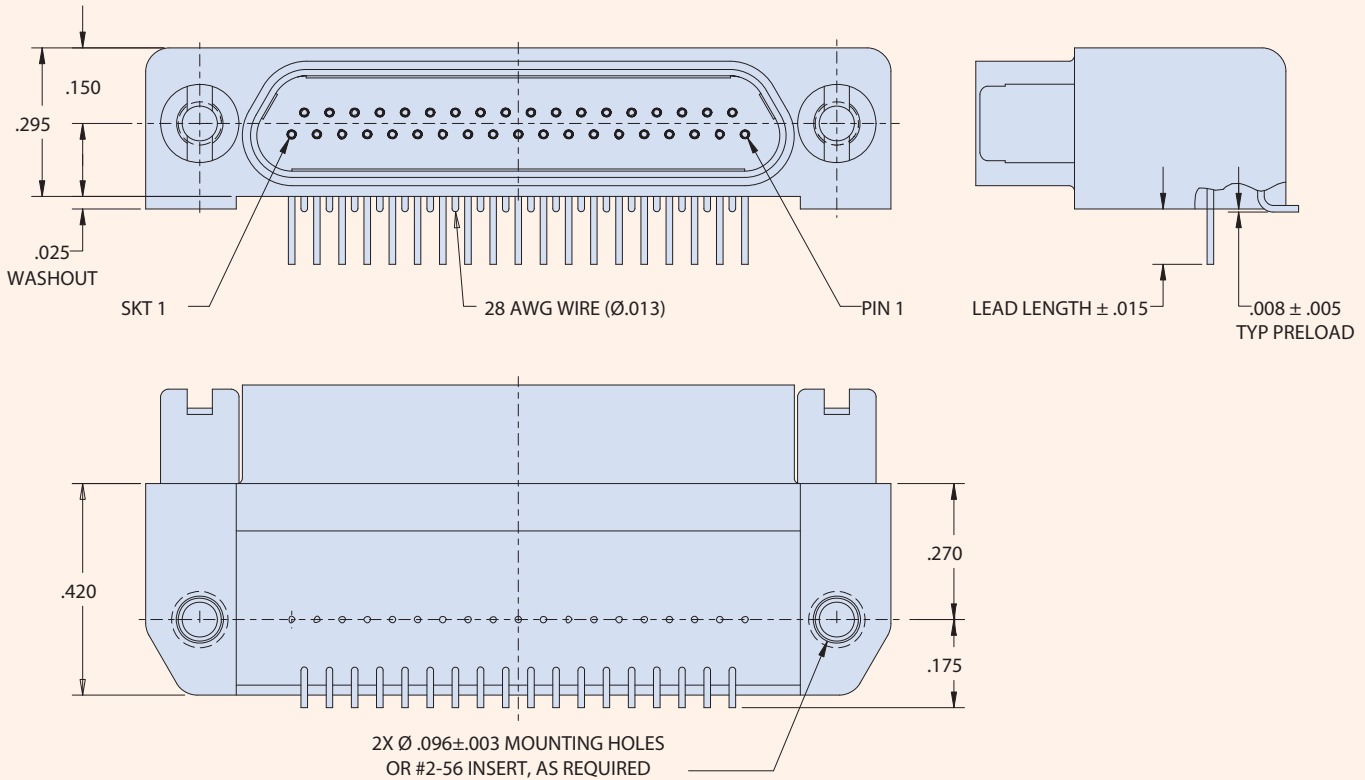

## How-to-order GHSRPM Rear-Panel Mount Cable Assembly Connectors

How To Order High-Speed Micro-D Wired Connectors	
<b>Sample Part Number</b>	<b>GHSRPM 2 R -31 P -A 8 J 1 -18 R3 N</b>
<b>Series</b>	<b>GHSRPM</b> = Glenair High-Speed Micro-D, Rear Panel Mount
<b>Shell Finish</b>	<b>2</b> = Nickel <b>5</b> = Gold
<b>Insulator Material</b>	<b>R</b> = PPS
<b>Contact Layout</b>	<b>9, 15, 21, 25, 31, 37, 51-2, 67</b>
<b>Contact Type</b>	<b>P</b> = Pin (Plug) <b>S</b> = Socket (Receptacle)
<b>High Speed Cable Type</b>	<b>A</b> = Glenair Cable 963-128-28 (100 Ohm) <b>B</b> = Glenair Cable 963-130-28 (90 Ohm)
<b>Discrete Wire Gage (AWG)</b>	<b>8</b> = #28 <b>0</b> = #30 (J Wire Type only)
<b>Discrete Wire Type</b>	<b>K</b> = M22759/11 600 VRMS Teflon (TFE) <b>J</b> = M22759/33 600 VRMS Modified Cross-Linked Tefzel (ETFE)
<b>Discrete Wire Color</b>	<b>1</b> = White <b>7</b> = Ten Color Repeating
<b>Wire Length</b>	Wire Length in Inches, 6 Inch Minimum
<b>Mounting Hardware</b>	<b>R1</b> = .032" Panel <b>R2</b> = .047" Panel <b>R3</b> = .062" Panel <b>R4</b> = .093" Panel <b>R5</b> = .125" Panel <b>R6</b> = .080" Panel
<b>O-Ring Material</b>	<b>C</b> = Conductive <b>N</b> = Non-Conductive (Nitrile)

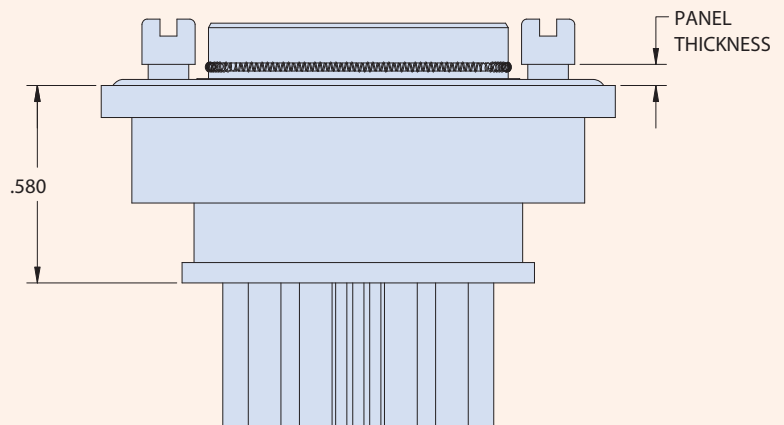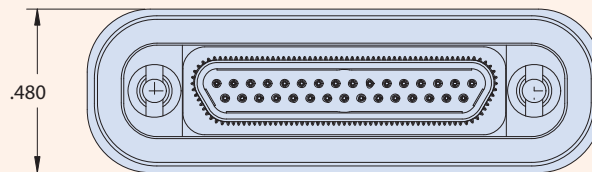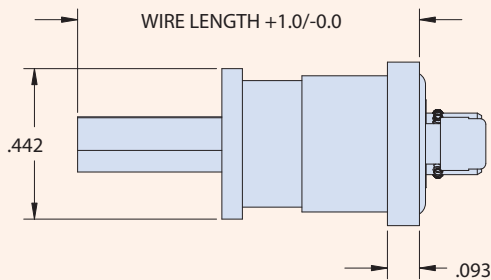





# HIGH-SPEED Micro-D



## How-to-order


## GHSRPM-BSS Rear-Panel Board Straight Surface Mount connectors

How To Order High-Speed Micro-D Board Straight Surface Mount Connectors	
<b>Sample Part Number</b>	<b>GHSRPM 2 R -25 P BSS R3 N</b>
<b>Series</b>	<b>GHSRPM</b> = Glenair High-Speed Micro-D, Rear Panel Mount
<b>Shell Finish</b>	<b>2</b> = Nickel <b>5</b> = Gold
<b>Insulator Material</b>	<b>R</b> = PPS
<b>Contact Layout</b>	<b>9, 15, 21, 25, 31, 37, 51-2, 67</b>
<b>Contact Type</b>	<b>P</b> = Pin (Plug) <b>S</b> = Socket (Receptacle)
<b>Termination Type</b>	<b>BSS</b> = Board Straight Surface Mount
<b>Rear Panel Mount Hardware Option</b>	<b>R2U</b> = .032" Panel <b>R3U</b> = .047" Panel <b>R4U</b> = .062" Panel <b>R5U</b> = .094" Panel <b>R6U</b> = .125" Panel <b>R7U</b> = .080" Panel
<b>O-Ring Material</b>	<b>C</b> = Conductive <b>N</b> = Non-Conductive (Nitrile)

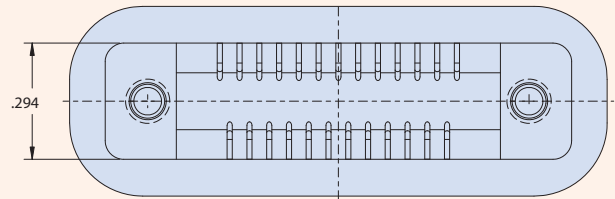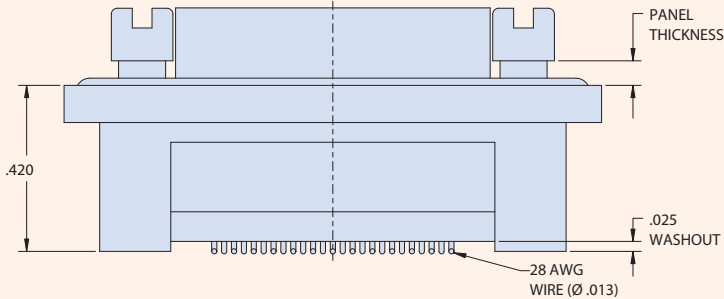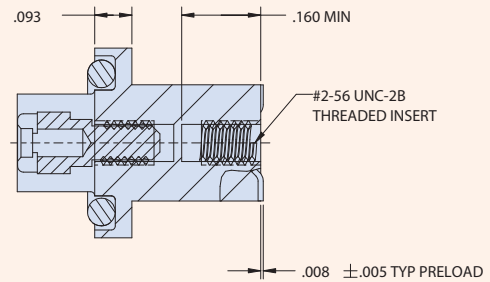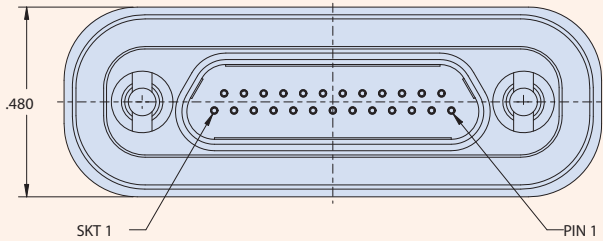


## How-to-order GHSRPM-HBR Rear-Panel Hybrid Board Right-Angle Connectors

How To Order High-Speed Micro-D Hybrid Board Right Angle Connectors											
<b>Sample Part Number</b>	GHSRPM 2 R -25 P HBR R3 T N -.110										
<b>Series</b>	GHSRPM = Glenair High-Speed Rear-Panel Micro-D										
<b>Shell Finish</b>	2 = Nickel 5 = Gold										
<b>Insulator Material</b>	R = PPS										
<b>Contact Layout</b>	9, 15, 21, 25, 31, 37, 51-2, 67										
<b>Contact Type</b>	P = Pin (Plug) S = Socket (Receptacle)										
<b>Termination Type</b>	HBR = Hybrid Board Right Angle										
<b>Rear Panel Mount Hardware Option</b>	R1 = .032" Panel R2 = .047" Panel R3 = .062" Panel R4 = .093" Panel R5 = .125" Panel R6 = .080" Panel										
<b>Threaded Insert Option</b>	T = Threaded Insert in Board Mounting Hole Omit for Thru-Hole										
<b>O-Ring Material</b>	C = Conductive N = Non-Conductive (Nitrile)										
<b>Right-Angle Lead Length</b>	-.080, -.110, -.140, -.172 (Length in Inches ±.015)										

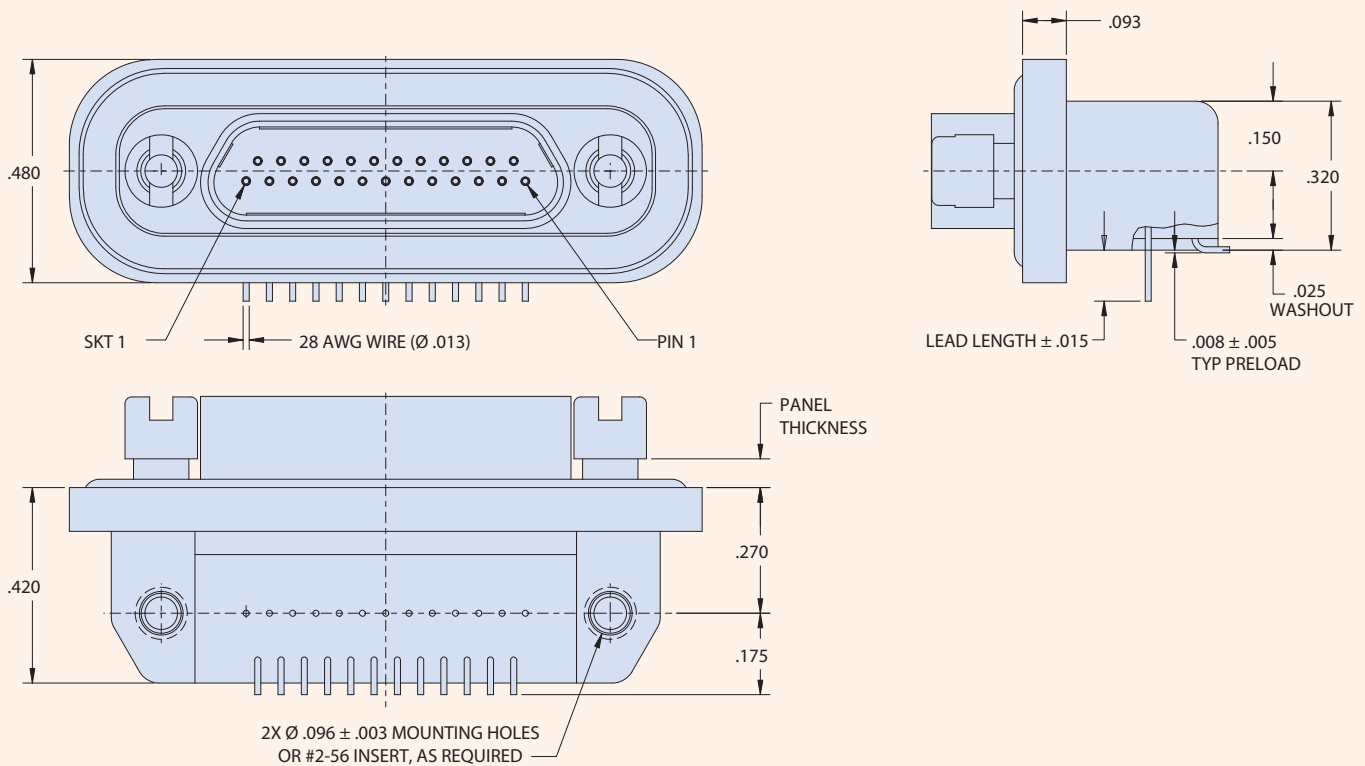

GLENAIR  
SIGNATURE  
FIBER OPTIC  
CONNECTION  
SYSTEMS

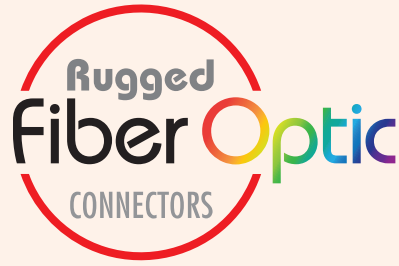

SuperNine®  
Tight-Tolerance  
MIL-DTL-38999 Sr. III  
Fiber Optic Connection  
System



The high-performance fiber optic interconnect system successfully deployed in hundreds of commercial and military aerospace and other applications—from F-16 upgrade systems to the revolutionary F-35 Joint Strike Fighter



Terminated and tested point-to-point and multibranch D38999 type fiber optic cable assemblies

- Composite, aluminum and stainless steel shells available
- Qualified size #16 MIL-PRF-29504 precision ceramic termini
- Singlemode and multimode fiber, from 9/125 to 1000 microns
- Ultra-low insertion loss values, <.50dB typical
- From 2 to 37 Termini
- Plug and In-Line, Jam Nut and Square Flange Receptacles
- Patented MIL-DTL-38999 fiber optic test probes and adapters


# SuperNine® MIL-DTL-38999 Series III Type



## Advanced fiber optic connection system




MIL-DTL-38999 type fiber optic connection system termination, inspection, test, and cleaning tools are available now from Glenair. We also offer comprehensive F/O training services for assembly and maintenance technicians.

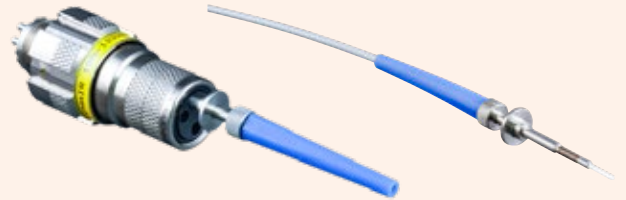

Glenair optical fiber test probes and connector adapters provide accurate and repeatable testing of MIL-DTL-38999 F/O assemblies

Glenair M29504/4 and /5 QPL termini are in stock and ready for immediate, same-day shipment

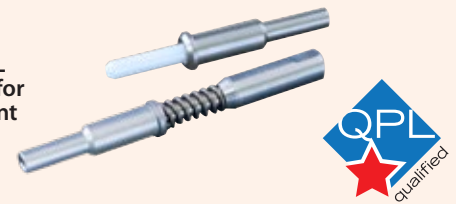


A complete range of metal and composite backshells and protective covers is available

MIL-PRF-29504/04 and /05 Fiber Optic Termini Performance Data	
Test Type	Performance Requirement
Operating Temperature	-55°C to +165°C (dependent on epoxy and cable)
Temperature Cycling	-65°C to +175°C
Thermal Shock	-55°C to +150°C, 5 cycles
Temperature Life	+150°C for 1,000 hours
Random Vibration	20-2,000 Hz, 42.2 g's
Shock (Half-sine Pulse)	300 g Peak Load
Mechanical Shock	MIL-S-901, Grade A, Type B, Class I
Mating Durability	500 cycles (cleaning after 100 matings)
Salt Spray	48 hours (Terminus only)
Cable Retention Force	22.0 lbs (dependent on cable construction)

Select SuperNine Fiber Optic Connector Part Numbers	
Glenair Dwg. Number*	Product Description
181-001	#16 Socket Terminus
181-002	#16 Pin Terminus
181-048	#16 Dummy Terminus
180-091 (05)	In-Line Receptacle Connector
180-091 (06)	Plug Connector
180-091 (08)	Jam Nut Mount Receptacle Connector
180-091 (H7)	Square Flange Wall Mount Receptacle with Round Holes
180-091 (S7)	Square Flange Wall Mount Receptacle with Slotted Holes
180-091 (T7)	Square Flange Wall Mount Receptacle with Tapped Holes

\* See fiber optic catalog for complete part number information


### INSERT ARRANGEMENTS

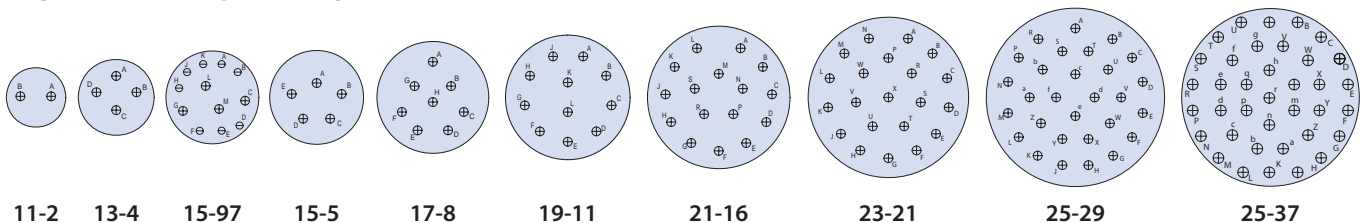

Per MIL-STD-1560. Mating face of pin insert shown.

# SuperNine® MIL-DTL-38999 Series III Type

## How to order Termini and Connectors



### M29504/04 TYPE, STYLE 1 PIN AND SOCKET TERMINI FOR MIL-DTL-38999 SERIES III



**181-002-XXX**  
Pin Terminus



**181-001-XXX**  
Socket Terminus



**181-048-16**  
Size 16 Dummy Terminus  
reduces weight and eliminates cost  
of using expensive contacts

Part Number	Fiber Size Core/Cladding/Coating (Microns)	Ø A (Microns)	Ref. M29504/04-XXXX
<b>181-00X-125</b>	9/125 (Singlemode)	125.5	M29504/04-4208
<b>181-00X-126S</b>	9/125 (Singlemode)	126.0	M29504/04-4209
<b>181-00X-126</b>	50/125 & 62.5/125	126.0	M29504/04-4210
<b>181-00X-127</b>	50/125 & 62.5/125	127.0	M29504/04-4040
<b>181-00X-142</b>	100/140	142.0	M29504/04-4043
<b>181-00X-144</b>	100/140	144.0	N/A
<b>181-00X-145</b>	100/140	145.0	M29504/04-4044
<b>181-00X-156</b>	62.5/125/155 (Polyimide)	156.0	M29504/04-4211
<b>181-00X-157</b>	62.5/125/155 (Polyimide)	157.0	M29504/04-4212
<b>181-00X-173</b>	100/140/172 (Polyimide)	173.0	M29504/04-4087
<b>181-00X-175</b>	100/140/172 (Polyimide)	175.0	M29504/04-4213
<b>181-00X-231</b>	200/230	231.0	N/A
<b>181-00X-236</b>	200/230	236.0	N/A
<b>181-00X-286</b>	200/280	286.0	N/A
<b>181-00X-448</b>	400/440	448.0	N/A
<b>181-00X-533</b>	486/500	533.0	N/A

### SUPERNINE FIBER OPTIC CONNECTORS



Part Number Development						
Sample Part Number	<b>180-091</b>	<b>XW</b>	<b>06</b>	<b>-17-8</b>	<b>P</b>	<b>N</b>
Series / Basic Part No.	D38999 Series III Type					
Material/Finish	See Material/Finish Table					
Connector Style	<b>06</b> = Plug Connector					
Shell Size/Insert Arr.*	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
Insert Designation	<b>P</b> = Pin <b>S</b> = Socket					
Alternate Key Position*	<b>A, B, C, D, E, N</b> = Normal; Per MIL-DTL-38999					




Part Number Development						
Sample Part Number	<b>180-091</b>	<b>XW</b>	<b>05</b>	<b>-17-8</b>	<b>P</b>	<b>N</b>
Series / Basic Part No.	D38999 Series III Type					
Finish	See Material/Finish Table					
Connector Style*	<b>05</b> = In-Line Receptacle					
Shell Size/Insert Arr.*	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
Insert Designation	<b>P</b> = Pin <b>S</b> = Socket					
Alternate Key Position*	<b>A, B, C, D, E, N</b> = Normal; Per MIL-DTL-38999					

# SuperNine® MIL-DTL-38999 Series III Type



## How to order Connectors



Part number development						
<b>Sample Part Number</b>	<b>180-091</b>	<b>XW</b>	<b>08</b>	<b>-17-8</b>	<b>P</b>	<b>N</b>
<b>Series / Basic Part No.</b>	D38999 Series III Type					
<b>Material/Finish</b>	See Material/Finish Table					
<b>Connector Style</b>	08 = Jam Nut Receptacle					
<b>Shell Size/Insert Arr.*</b>	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
<b>Insert Designation</b>	P = Pin S = Socket					
<b>Alternate Key Position*</b>	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					



Part number development						
<b>Sample Part Number</b>	<b>180-091</b>	<b>XW</b>	<b>H7</b>	<b>-17-8</b>	<b>P</b>	<b>N</b>
<b>Series / Basic Part No.</b>	D38999 Series III Type					
<b>Material/Finish</b>	See Material/Finish Table					
<b>Connector Style</b>	H7 = Wall Mount Receptacle with Round Holes (Std)					
<b>Shell Size/Insert Arr.*</b>	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
<b>Insert Designation</b>	P = Pin S = Socket					
<b>Alternate Key Position*</b>	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					




Part number development						
<b>Sample Part Number</b>	<b>180-091</b>	<b>XW</b>	<b>S7</b>	<b>-17-8</b>	<b>P</b>	<b>N</b>
<b>Series / Basic Part No.</b>	D38999 Series III Type					
<b>Material/Finish</b>	See Material/Finish Table					
<b>Connector Style</b>	S7 = Wall Mount Receptacle with Slotted Holes					
<b>Shell Size/Insert Arr.*</b>	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
<b>Insert Designation</b>	P = Pin S = Socket					
<b>Alternate Key Position*</b>	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					




Part number development						
<b>Sample Part Number</b>	<b>180-091</b>	<b>XW</b>	<b>T7</b>	<b>-17-8</b>	<b>P</b>	<b>N</b>
<b>Series / Basic Part No.</b>	D38999 Series III Type					
<b>Material/Finish</b>	See Material/Finish Table					
<b>Connector Style</b>	T7 = Wall Mount Receptacle with Threaded Insert Holes					
<b>Shell Size/Insert Arr.*</b>	IAW MIL-DTL-38999 Series III, Per MIL-STD-1560					
<b>Insert Designation</b>	P = Pin S = Socket					
<b>Alternate Key Position*</b>	A, B, C, D, E, N = Normal; Per MIL-DTL-38999					

GLENAIR  
SIGNATURE  
FIBER OPTIC  
CONNECTION  
SYSTEMS

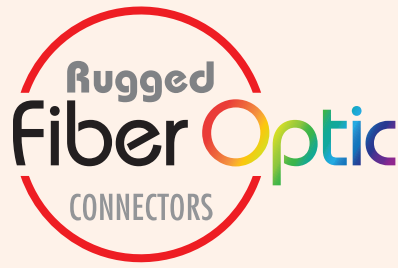


Glenair High Density (GHD): nearly double the density of standard mil-spec fiber optic designs

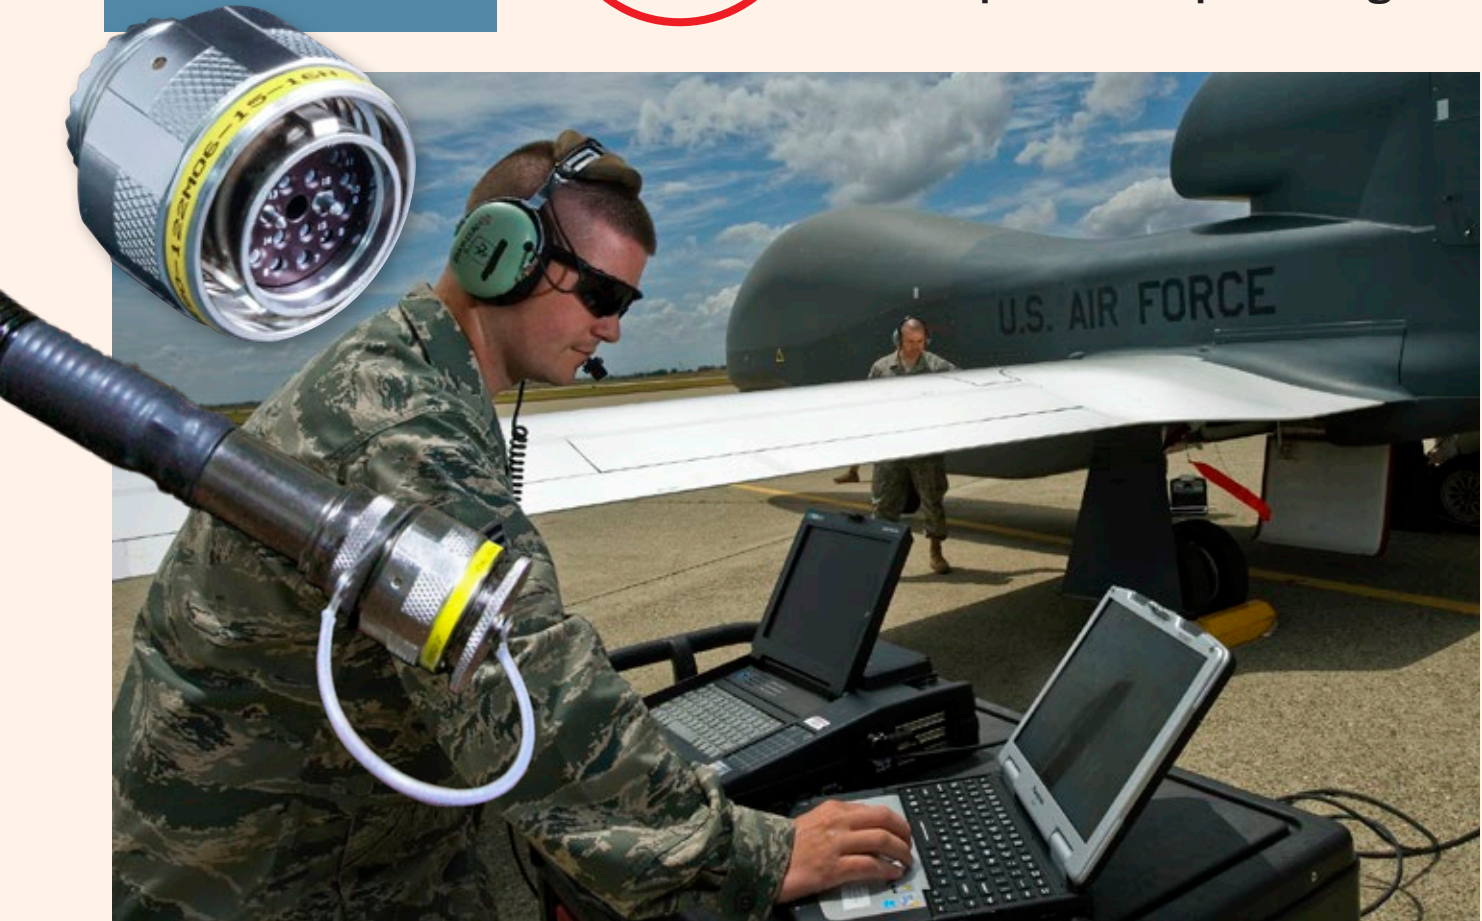

The system of choice for military and commercial air, space and other applications: Outstanding optical and environmental performance with nearly double the density of standard mil-spec solutions

- Innovative #18 (1.25mm ferrule) front-release genderless termini accommodate 900 $\mu$  to 2.0mm jacketed fiber
- M85045/16 cable accommodation
- Composite, aluminum or stainless steel shells
- Single keying for APC polish available
- Better optical performance than D38999 with nearly double the density
- Precision alignment sleeve retainer with integrated guide pins
- Piston o-ring sealing—submersible design

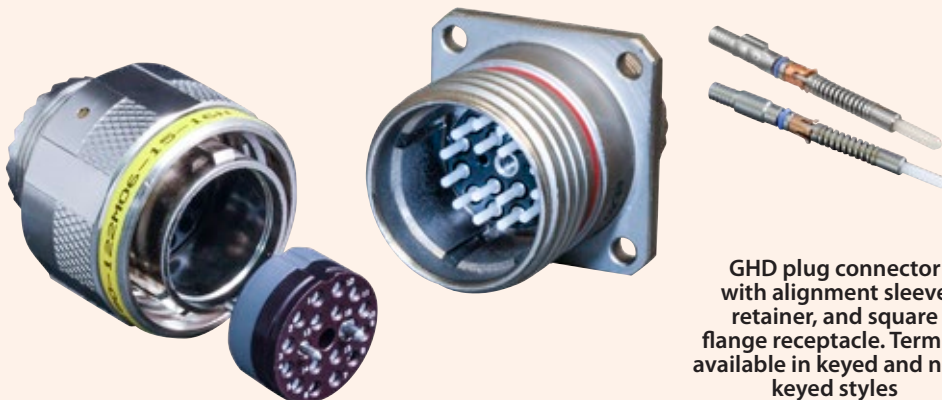


GHD plug connector with alignment sleeve retainer, and square flange receptacle. Termini available in keyed and non-keyed styles

# SIZE- AND WEIGHT- SAVING Glenair High Density (GHD)



## Signature HD fiber optic connection system

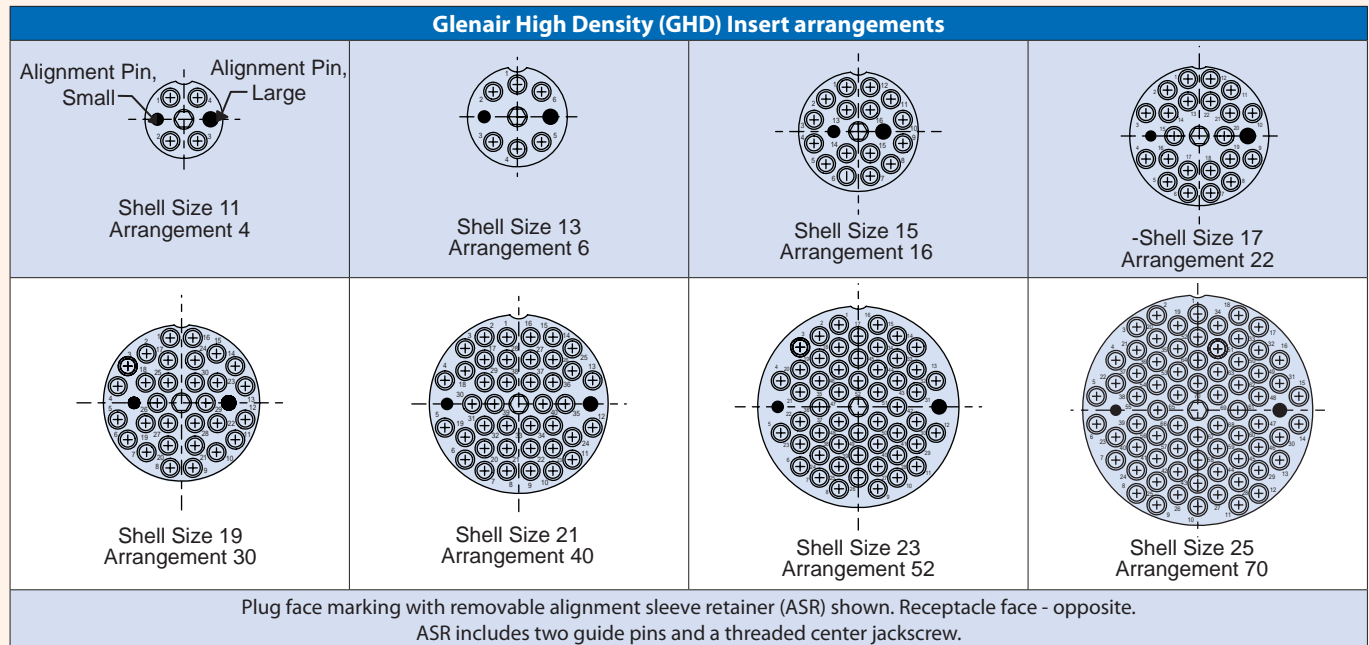

Fiber Optic Pin Termini Specifications			
Assembly Dash Number		Fiber Size Core/Cladding	A Dia. [microns]
Keyed	Non-Keyed		
181-047-1255C	181-056-1255C	9/125 (Singlemode)	125.5
181-047-1260C	181-056-1260C	9/125, 50/125, 62.5/125	126.0
181-047-1270C	181-056-1270C	50/125, 62.5/125	127.0
181-047-1420C	181-056-1420C	100/140	142.0
181-047-1450C	181-056-1450C	100/140	145.0
181-047-1560C	181-056-1560C	62.5/125/155 (Polyimide)	156.0
181-047-1570C	181-056-1570C	62.5/125/155 (Polyimide)	157.0
181-047-1730C	181-056-1730C	100/140/172 (Polyimide)	173.0
181-047-1750C	181-056-1750C	100/140/172 (Polyimide)	175.0
181-047-2360C	181-056-2360C	200/233	236.0
181-047-2860C	181-056-2860C	200/280	286.0


Crimp Sleeve is supplied with Terminus Assembly, and may be ordered separately. For terminus less crimp sleeve, omit **C** from end of part number (e.g. 181-056-1260)

GHD Fiber Optic Part Number Reference	
Glenair Dwg. Number	Product Description
181-047	#18 Pin Terminus, Keyed for APC Polish
181-056	#18 Pin Terminus (non-keyed)
181-058	#18 Dummy Terminus
180-122 (05)	In-Line Receptacle Connector
180-122 (06)	Plug Connector with Alignment Sleeve Retainer
180-122 (08)	Jam Nut Mount Receptacle Connector
180-122 (H7)	Square Flange Receptacle with Round Holes
180-122 (S7)	Square Flange Receptacle with Slotted Holes


\* See fiber optic catalog for complete part number information

Pin Density Comparison: Glenair High Density Versus D38999 and M28876								
Connector Style / Size	11	13	15	17	19	21	23	25
D38999 Cavity Count	2	4	5	8	11	16	21	29/37
M28876 Cavity Count	2	4	8	N/A	N/A	N/A	31	N/A
GHD Cavity Count	4	6	16	20	30	40	52	70


### Glenair High Density (GHD) Features

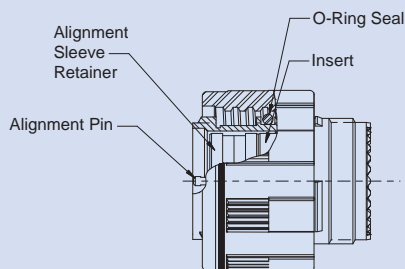

**D38999 Series III Style Coupling**  
Five Alternate Key Positions: A, B, C, D, E (N = Normal)

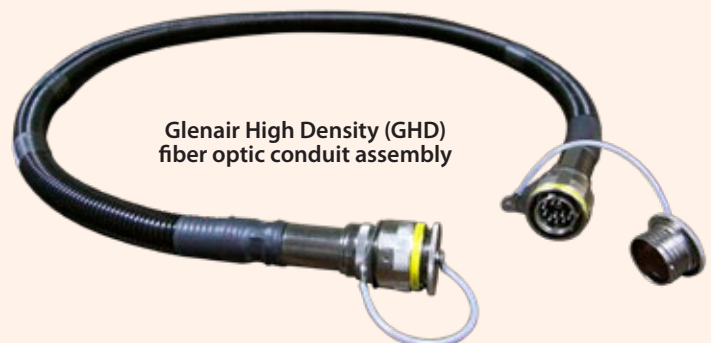


# SIZE- AND WEIGHT- SAVING Glenair High Density (GHD)




## Signature HD fiber optic connection system How to order connectors


Part Number Development						
<b>Sample Part Number</b>	<b>180-122</b>	<b>NF</b>	<b>06</b>	<b>-15-16</b>	<b>N</b>	<b>C</b>
<b>Series / Basic Part No.</b>	Glenair High Density Fiber Optic Connector					
<b>Material/Finish</b>	See Material/Finish Table					
<b>Connector Style</b>	<b>06</b> = Plug with Alignment Sleeve Retainer					
<b>Shell Size/Insert Arr.</b>	<b>11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70</b>					
<b>Alternate Key Position*</b>	<b>A, B, C, D, E, N</b> = Normal					
<b>O-Ring Option</b>	<b>C</b> = Conductive O-Ring <b>Omit</b> = Standard O-Ring					

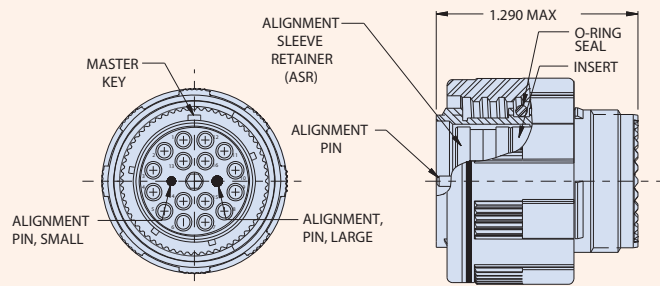

Part Number Development			
<b>Sample Part Number</b>	<b>180-122</b>	<b>ASR</b>	<b>-15-16</b>
<b>Series / Basic Part No.</b>	Glenair High Density Fiber Optic Connector		
<b>Connector Style</b>	<b>ASR</b> = Alignment Sleeve Retainer		
<b>Shell Size/Insert Arr.</b>	<b>11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70</b>		

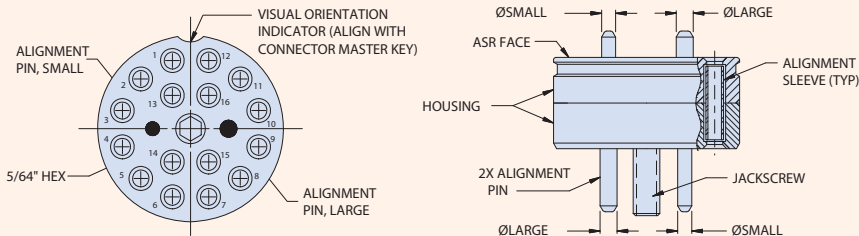

Part Number Development					
<b>Sample Part Number</b>	<b>180-122</b>	<b>NF</b>	<b>08</b>	<b>-15-16</b>	<b>N</b>
<b>Series / Basic Part No.</b>	Glenair High Density Fiber Optic Connector				
<b>Material/Finish</b>	See Material/Finish Table				
<b>Connector Style</b>	<b>08</b> = Jam Nut Receptacle				
<b>Shell Size/Insert Arr.</b>	<b>11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70</b>				
<b>Alternate Key Position*</b>	<b>A, B, C, D, E, N</b> = Normal				

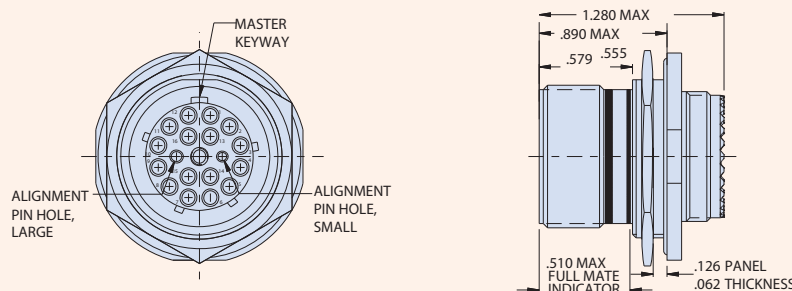


# SIZE- AND WEIGHT- SAVING Glenair High Density (GHD)




## Signature HD fiber optic connection system How to order connectors


Part Number Development					
Sample Part Number	180-122	NF	05	-15-16	N
Series / Basic Part No.	Glenair High Density Fiber Optic Connector				
Material/Finish	See Material/Finish Table				
Connector Style	05 = In-Line Receptacle				
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70				
Alternate Key Position*	A, B, C, D, E, N = Normal				

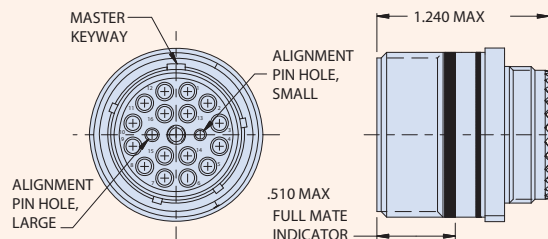


Part Number Development					
Sample Part Number	180-122	NF	H7	-15-16	N
Series / Basic Part No.	Glenair High Density Fiber Optic Connector				
Material/Finish	See Material/Finish Table				
Connector Style	H7 = Wall Mount Receptacle with Round Holes				
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70				
Alternate Key Position*	A, B, C, D, E, N = Normal				

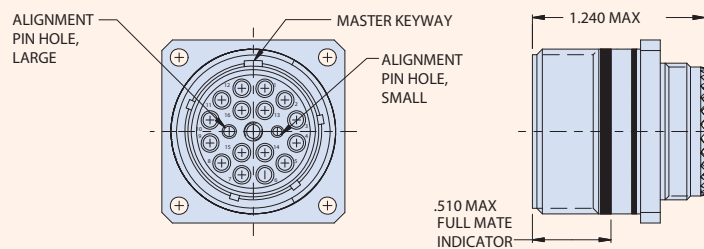

Part Number Development					
Sample Part Number	180-122	NF	S7	-15-16	N
Series / Basic Part No.	Glenair High Density Fiber Optic Connector				
Material/Finish	See Material/Finish Table				
Connector Style	S7 = Wall Mount Receptacle with Slotted Holes				
Shell Size/Insert Arr.	11-4, 13-6, 15-16, 17-22, 19-30, 21-40, 23-52, 25-70				
Alternate Key Position*	A, B, C, D, E, N = Normal				

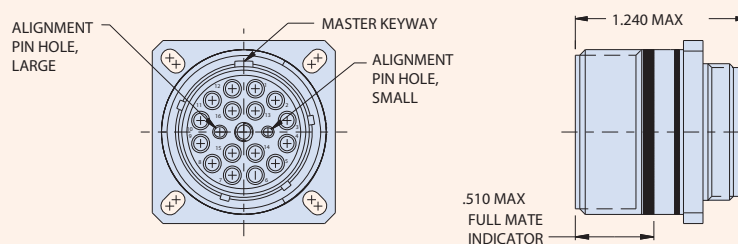

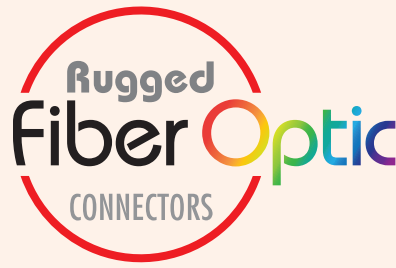

## GFR: Glenair Front Release Fiber Optic Connection System



The unique design of the Glenair Front Release system allows for rapid integration of optical media in a broad range of cylindrical and rectangular connector packages. By placing retention and environmental sealing components directly on the termini, Glenair is able to fabricate unique fiber optic connector shell packages without costly tooling and engineering.

- Precision size 16 pin-socket front release termini with integrated retention clip
- Singlemode and multimode for all popular fiber sizes
- Typical insertion loss less than 0.5 dB
- Cylindrical and rectangular connectors
- Connector shells available in aluminum and stainless steel

## Signature fiber optic connection system




Glenair Front Release (GFR) fiber optic connection systems perform at insertion loss levels equivalent to other high-performance, tactical fiber optic systems such as M29504 termini used in D38999 and M28876 connectors. The GFR system enables Glenair to integrate optical media in Micro-D and D-Subminiature shells as well as micro miniature circular packaging. Contact the factory for availability and application engineering assistance for both standard and custom fiber optic connection systems.

### HOW TO ORDER GLENAIR FRONT RELEASE MICRO MINIATURE CIRCULAR CONNECTORS




Contact the Factory for circular connectors requiring enhanced vibration and mechanical shock performance

How To Order GFR Micro Miniature Circular Connectors			180-132	M	06-	9-4	P	A
<b>Sample Part Number</b>								
<b>Series</b>	180-132 GFR Micro Miniature Circular							
<b>Shell Size</b>	<b>C</b>	Anodize, Black						
	<b>M</b>	Electroless Nickel						
	<b>NF</b>	Aluminum Alloy	CAD/Olive Drab over Electroless Nickel					
	<b>ZN</b>	Zinc-Nickel/Olive Drab over Electroless Nickel						
	<b>ZNU</b>	Black Zinc-Nickel over Electroless Nickel						
<b>Z1</b>	Stainless Steel	Passivate						
<b>Connector Style</b>	04- Jam Nut w/ Wire Holes    06- Plug 08- Jam Nut Receptacle    07- Wall Mount Receptacle							
<b>Shell Size/Insert Arr.</b>	9-2, 9-4, 13-8, 16-12							
<b>Contact Type</b>	P - Pin Termini    S - Socket Termini							
<b>Key Polarization</b>	A, B, C, D (See Table). Omit for 9-2 Arrangement which has 2 Keys/Keyways only.							

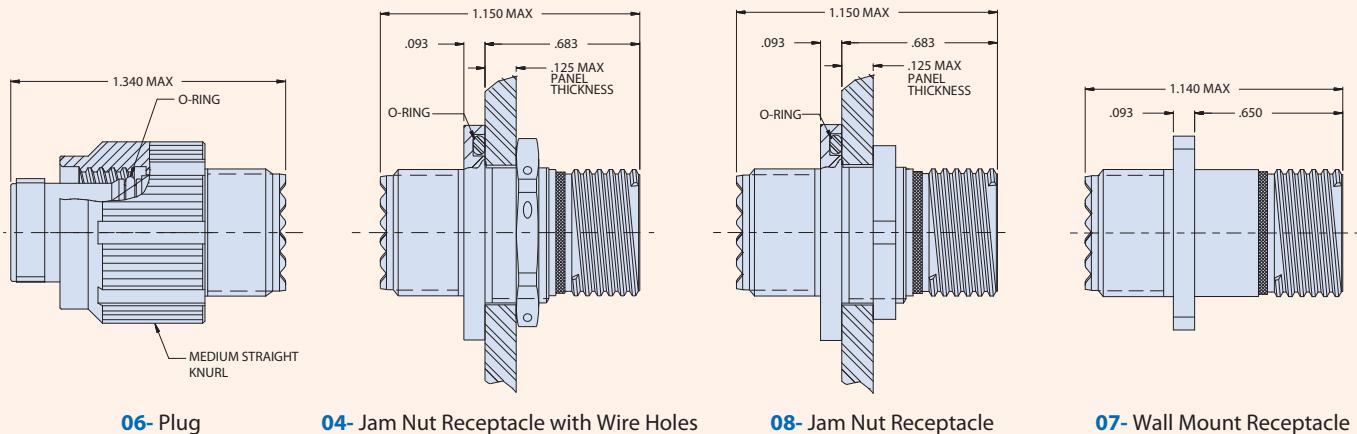


Key Polarization		
Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°

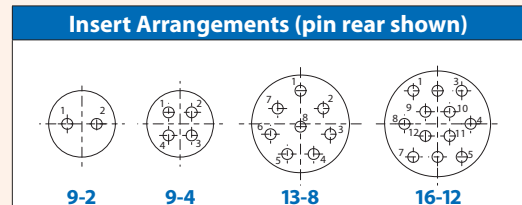


# RAPID INTEGRATION Glenair Front Release (GFR)

## How to order GFR Termini



### PIN TERMINI

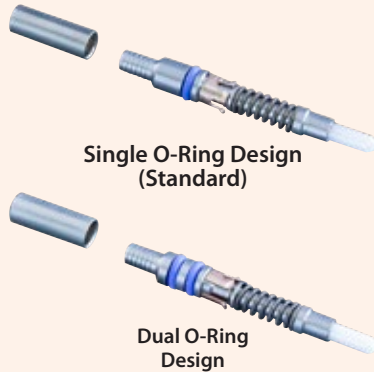

### SOCKET TERMINI



### DUMMY TERMINUS



How To Order GFR Fiber Optic Termini				
<b>Sample Part Number</b>	<b>181-011</b>	<b>-126</b>	<b>K</b>	<b>D</b>
<b>Series</b>	<b>181-012</b> GFR front-release pin terminus <b>181-011</b> GFR front-release socket terminus			
<b>Dash No.</b>	<b>Dash No.</b>	<b>Ferrule Hole Ø</b>	<b>Typical Fiber Type</b>	<b>Typical Fiber Size core/cladding/coating</b>
	<b>-125</b>	125.5 µm	Single Mode	9/125 µm
	<b>-126S</b>	126.0 µm	Single Mode	9/125 µm
	<b>-126</b>	126.0 µm	Multi Mode	50/125, 62.5/125 µm
	<b>-142</b>	142.0 µm	Multi Mode	100/140 µm
	<b>-156</b>	156.0 µm	Multi Mode	62.5/125/155 µm (Polyimide)
	<b>-173</b>	173.0 µm	Multi Mode	100/140/172 µm (Polyimide)
	<b>-175</b>	175.0 µm	Multi Mode	100/140/172 µm (Polyimide)
	<b>-231</b>	231.0 µm	Multi Mode	200/225 µm
	<b>-236</b>	236.0 µm	Multi Mode	200/230 µm
<b>-286</b>	286.0 µm	Multi Mode	200/280 µm	
<b>-448</b>	448.0 µm	Multi Mode	400/440 µm	
<b>Alignment Sleeve (socket only)</b>	<b>K</b> = Stainless Steel Sleeve <b>Omit</b> = Ceramic Sleeve (standard) Omit designator for pin terminus			
<b>O-Ring Option</b>	<b>D</b> = Dual O-Rings <b>Omit</b> = Single O-Ring (standard)			

Dummy Terminus	
<b>181-051</b>	Size 16 Dummy Terminus for GFR Connectors

### TERMINI MATERIAL AND FINISH

Ferrule: Zirconia Ceramic  
 Alignment Sleeve (socket): Zirconia Ceramic or Stainless Steel/Passivate  
 Protective Cover (socket): BeCu Alloy/Nickel  
 Body: Stainless Steel/Passivate  
 Spring (pin): Stainless Steel/Passivate  
 Bushing (pin): Stainless Steel/Passivate  
 Retention Clip: BeCu Alloy  
 O-Ring(s): Fluorosilicone  
 Crimp Sleeve: Brass Alloy/Nickel

### NOTES

Crimp sleeves are supplied with terminus assemblies. Spares may be ordered separately. See Glenair GAP-031 and GAP-031B for termination and assembly tools/procedures.

Table II: Tools and Accessories	
<b>182-005S</b>	Polishing Tool, socket
<b>182-005P</b>	Polishing Tool, pin
<b>182-012</b>	Crimp Tool
<b>182-013</b>	Insertion Tool, Straight
<b>182-014</b>	Insertion Tool, 90 Degree
<b>182-015</b>	Removal Tool
<b>182-016</b>	Insertion/Removal Tool, Alignment Sleeve, socket
<b>181-011-S</b>	Protective Cover with Ceramic Sleeve
<b>181-011-K</b>	Protective Cover with Stainless Steel Sleeve
<b>265-002</b>	Crimp Sleeve, Ø 2.2mm Max Jacket

# Glenair Front Release (GFR)




## How to order GFR Micro-D and D-Subminiature connectors




Avoid damage! Consult the factory for mating / unmating instructions

How To Order GFR Micro-D Connectors				
<b>Sample Part Number</b>	<b>180-064</b>	<b>-25</b>	<b>-4</b>	<b>M</b>
<b>Series</b>	<b>180-064</b> GFR Micro-D Plug <b>180-063</b> GFR Micro-D Receptacle			
<b>Shell Size</b>	<b>-9</b> (1 terminus max) <b>-15</b> (2 termini max) <b>-21</b> (3 termini max) <b>-25</b> (4 termini max) <b>-31</b> (5 termini max) <b>-100</b> (8 termini max)			
<b>No. of Termini</b>	<b>1, 2, 3, 4, 5, 8</b>			
<b>Material / Finish</b>	<b>C</b>	Aluminum Alloy	Anodize, Black	
	<b>M</b>		Electroless Nickel	
	<b>NF</b>		CAD/Olive Drab over Electroless Nickel	
	<b>ZN</b>		Zinc-Nickel/Olive Drab over Electroless Nickel	
	<b>Z1</b>	Stainless Steel	Passivate	



Recommended Panel Cutout

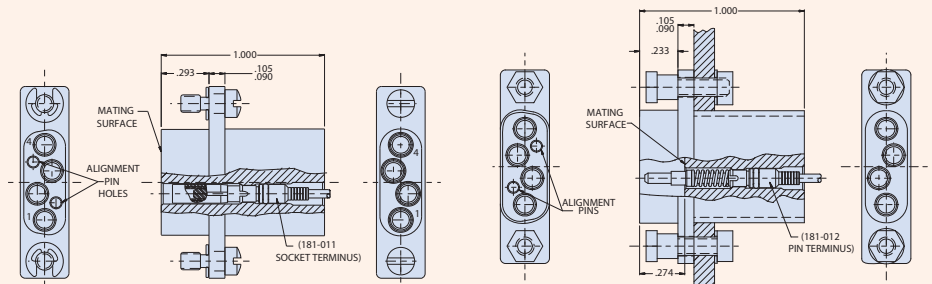


180-064 Plug

180-063 Receptacle




Avoid damage! Consult the factory for mating / unmating instructions

How To Order GFR D-Subminiature Connectors				
<b>Sample Part Number</b>	<b>180-066</b>	<b>-15</b>	<b>-5</b>	<b>-M</b>
<b>Series</b>	<b>180-066</b> GFR D-Sub Plug <b>180-065</b> GFR D-Sub Receptacle			
<b>Shell Size</b>	<b>-9</b> (4 termini max) <b>-15</b> (5 termini max) <b>-25</b> (8 termini max) <b>-50</b> (12 termini max)			
<b>No. of Termini</b>	<b>4, 5, 8, 12</b>			
<b>Material / Finish</b>	<b>C</b>	Aluminum Alloy	Anodize, Black	
	<b>M</b>		Electroless Nickel	
	<b>NF</b>		CAD/Olive Drab over Electroless Nickel	
	<b>ZN</b>		Zinc-Nickel/Olive Drab over Electroless Nickel	
	<b>Z1</b>	Stainless Steel	Passivate	

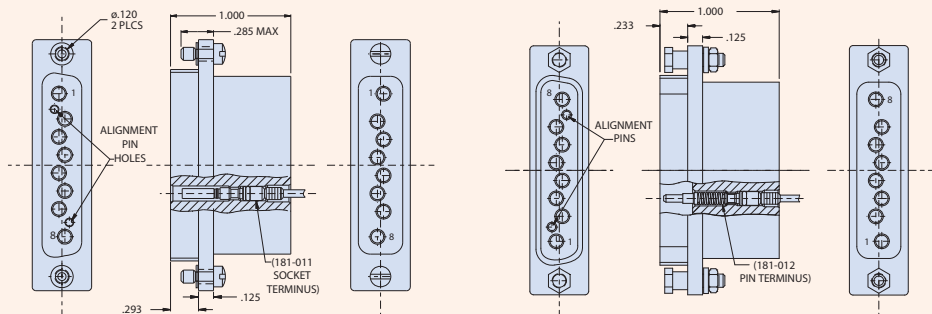

180-066 Plug

180-065 Receptacle

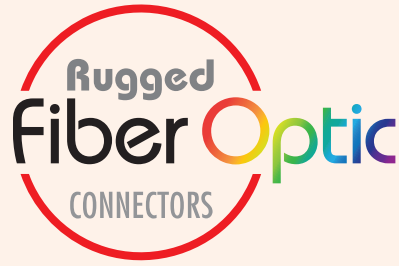
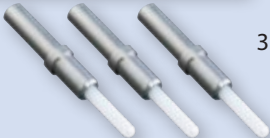


Rugged high-density  
MT Ferrule fiber optic  
connection system—with  
mil-grade SuperNine® or  
Series 791 packaging



Rugged performance MT ferrules  
in MIL-DTL-38999 advanced-  
performance connectors or in  
precision-machined Series 791  
rectangulars—only from Glenair

- SuperNine with MT
- Ruggedized “better than QPL” SuperNine® MIL-DTL-38999 Series III type interconnect packaging
- Singlemode and multimode fiber
- Low insertion loss
- Environmental sealing: IP67 mated, IP68 available at interface
- RoHS-compliant finishes available
- MT ferrules sold separately
- MT assembly tool, P/N 182-062 also available and sold separately

The MT Ferrule High-Density Advantage	
 <p>24 fibers</p>  <p>3 fibers</p>	<p>Up to 24 fibers in a single compact, lightweight ferrule (7mm x 3mm / .276" x .118") —same real estate as three size #16 termini side by side</p>

Signature fiber optic connection system:  
SuperNine D38999 and Series 791 Rectangular


**SUPERNINE® MT CONNECTOR SIZES AND INSERT ARRANGEMENTS**

SuperNine® MT MIL-DTL-38999 Series III type connectors with plug-and-play MT ferrule accommodation			
<p>CONNECTOR MASTER KEY 2X GUIDE PIN</p>			
<p>Shell Size 11 Insert Arrangement -1 Up to 24 fibers (1 MT ferrule)</p>	<p>Shell Size 13 Insert Arrangement -2 Up to 48 fibers (2 MT ferrules)</p>	<p>Shell Size 15 Insert Arrangement -3 Up to 72 fibers (3 MT ferrules)</p>	<p>Shell Size 17 Insert Arrangement -4 Up to 96 fibers (4 MT ferrules)</p>


**SERIES 791 WITH MT**

Series 791 MT fiber optic connector is the world's smallest ruggedized MT connector solution with robust resistance to vibration and shock. Series 79 MT delivers superior low insertion-loss performance (up to 500 mating cycles) compared to commercial solutions. Connectors are supplied in single (consult factory for dual and quad) MT configurations with retaining plate and optional banding porch on plugs, and ultra low-profile retaining plate on receptacles.


**SERIES 791 PRECISION-MACHINED SPACE-GRADE MT FERRULE-EQUIPPED CONNECTORS**



Receptacle with female MT ferrule available with or without EMI gasket




Plug with male MT ferrule with retaining plate and banding porch





Plug with male MT ferrule and retaining plate

- Ruggedized small form-factor, high-density MT fiber optic solution
- Temperature tolerance from -40°C to +85°C
- Optimized for use with parallel optic transceivers in ribbon or round cable applications
- Low insertion loss performance in high vibration and shock environments

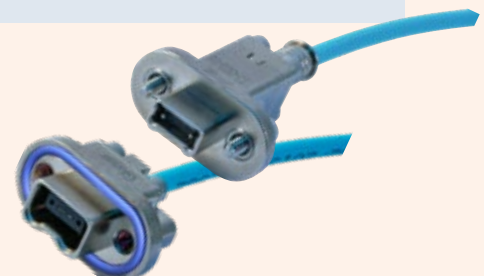


# SERIES 183-001 SuperNine MT Fiber Optic Connectors

## How to order connectors

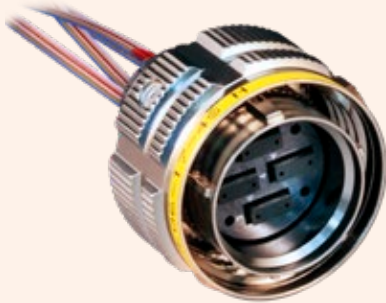

SuperNine MT Cable Plug						
<b>Sample Part Number</b>	<b>183-001</b>	<b>ME</b>	<b>G6</b>	<b>-17-4</b>	<b>S</b>	<b>N</b>
<b>Basic Part Number</b>	MT Ferrule Fiber Optic Connector					
<b>Material/Finish Code</b>	See Table I					
<b>Connector Style</b>	G6 = Plug with EMI/RFI ground spring					
<b>Shell Size / Insert Arrangement</b>	11-1, 13-2, 15-3, 17-4					
<b>Insert Designator</b>	S = Socket insert (plug only)					
<b>Alternate Key Position</b>	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					



SuperNine MT Jam Nut Mount Receptacle						
<b>Sample Part Number</b>	<b>183-001</b>	<b>ME</b>	<b>08</b>	<b>-17-4</b>	<b>P</b>	<b>N</b>
<b>Basic Part Number</b>	MT Ferrule Fiber Optic Connector					
<b>Material/Finish Code</b>	See Table I					
<b>Connector Style</b>	08 = Jam nut receptacle					
<b>Shell Size / Insert Arrangement</b>	11-1, 13-2, 15-3, 17-4					
<b>Insert Designator</b>	P = Pin insert (receptacle only)					
<b>Alternate Key Position</b>	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					




SuperNine MT In-Line Receptacle						
<b>Sample Part Number</b>	<b>183-001</b>	<b>ME</b>	<b>05</b>	<b>-17-4</b>	<b>P</b>	<b>N</b>
<b>Basic Part Number</b>	MT Ferrule Fiber Optic Connector					
<b>Material/Finish Code</b>	See Table I					
<b>Connector Style</b>	05 = In-line receptacle					
<b>Shell Size / Insert Arrangement</b>	11-1, 13-2, 15-3, 17-4					
<b>Insert Designator</b>	P = Pin insert (receptacle only)					
<b>Alternate Key Position</b>	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					

Table I - Material and Finish		
Code	Material	Finish Description
ME	Aluminum Alloy	Electroless Nickel
MT		Nickel-PTFE, Grey
NF		Cadmium, Olive Drab
ZR		Zinc-Nickel, Black
XM	Composite	Electroless Nickel
XW		Cadmium, Olive Drab
Z1	Stainless Steel	Passivate
ZL		Electro-Deposited Nickel

## How to order connectors




SuperNine MT Wall-Mount Receptacle, Standard Holes						
Sample Part Number	183-001	ME	H7	-17-4	P	N
Basic Part Number	MT Ferrule Fiber Optic Connector					
Material/Finish Code	See Table I					
Connector Style	H7 = Wall-mount receptacle with round holes					
Shell Size / Insert Arrangement	11-1, 13-2, 15-3, 17-4					
Insert Designator	P = Pin insert (receptacle only)					
Alternate Key Position	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					

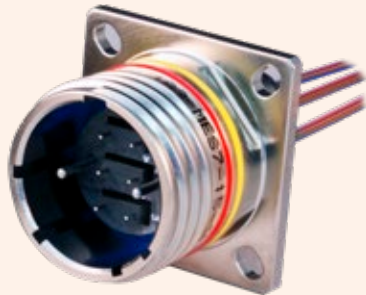

SuperNine MT Wall-Mount Receptacle, Slotted Holes						
Sample Part Number	183-001	ME	S7	-17-4	P	N
Basic Part Number	MT Ferrule Fiber Optic Connector					
Material/Finish Code	See Table I					
Connector Style	S7 = Wall-mount receptacle with slotted holes					
Shell Size / Insert Arrangement	11-1, 13-2, 15-3, 17-4					
Insert Designator	P = Pin insert (receptacle only)					
Alternate Key Position	A, B, C, D, E, N = Normal (per MIL-DTL-38999)					

Table I - Material and Finish		
Code	Material	Finish Description
ME	Aluminum Alloy	Electroless Nickel
MT		Nickel-PTFE, Grey
NF		Cadmium, Olive Drab
ZR		Zinc-Nickel, Black
XM	Composite	Electroless Nickel
XW		Cadmium, Olive Drab
Z1	Stainless Steel	Passivate
ZL		Electro-Deposited Nickel

### MT FERRULE KIT




How To Order MT Ferrules				
Sample Part Number	181-108	-1253	-12	S
Basic Part Number	MT Ferrule kit			
Fiber type	-1253 = Singlemode -126 = Multimode			
Number of Fibers	-12 (12 fibers, available in singlemode and multimode) -24 (24 fibers, available in multimode only)			
Ferrule Style	S = Female (Plug Only) P = Male (Recp Only)			

Material/Finish

- Ferrule: Polyphenylene Sulfide Resin
- Spacer, Female: High-grade engineering plastic
- Spring: Stainless Steel
- Boot: TPE

GLENAIR  
SIGNATURE  
FIBER OPTIC  
CONNECTION  
SYSTEMS

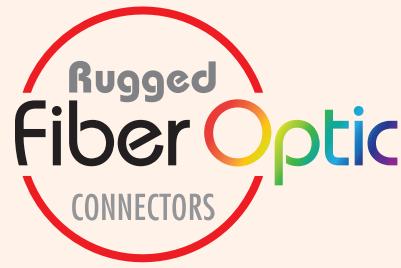

Rugged High-Density  
**MT Ferrule** Fiber Optic  
Connection System—  
With Mil-Grade Miniature  
Series 79 Packaging



Single-ferrule high-density  
MT datalinks in Glenair  
Signature Series  
79 rectangular  
packaging  
optimize SWaP in  
mission-critical  
mil-aero  
applications




Connector series supports both ribbon and round cable, as well as standard and expanded-beam MT ferrules

- Small form-factor, high-density fiber optic solution for rugged mil-aero applications
- Temperature tolerance from -40°C to +85°C
- Optimized for use with parallel optical transceivers in ribbon or round cable applications
- Designed for optimal low insertion loss performance in high vibration and shock environments

# ULTRA HIGH-DENSITY Rugged MT Fiber Optic Connectors



## Signature fiber optic connection system: miniature Series 79 packaging



-06 plug, with retaining plate for EMI shield termination and strain relief of ribbon or round fiber cable



-S7 receptacle with standard retaining plate




-S7 receptacle with conductive EMI gasket

### ABOUT SERIES 79 MT FIBER OPTIC CONNECTORS

Designed in accordance with rugged mil-aero industry specifications, the Glenair Series 79 MT fiber optic connector is the world's smallest ruggedized MT connector solution. High-density MT ferrules are packaged in precision-machined rectangular aluminum shells with electroless nickel finish, or passivated stainless steel shells for higher temperature applications. Receptacles may be equipped with optional EMI gaskets, and mate bottom-to-bottom with plug assemblies for robust resistance to vibration and shock. Designed for harsh-environment, inside-the-box use in parallel optics, fiber optic backplanes, missile systems, spacecraft and satellites, heads-up displays, and other ribbonized or flex-circuit fiber optic datalinks, the Series 79 MT delivers superior low insertion-loss performance (up to 500 mating cycles). Connectors are supplied in single (consult factory for dual and quad) MT configurations with banding platform or ultra low-profile retaining plate options.

#### The MT Ferrule High-Density Advantage

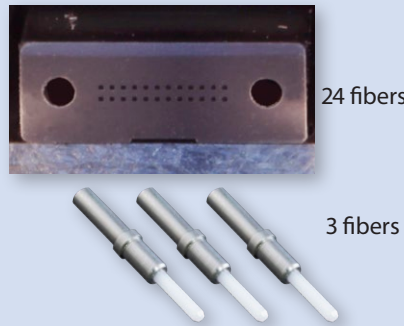

Up to 24 fibers in a single compact, lightweight ferrule (7mm x 3mm / .276" x .118")—same real estate as three size #16 termini side by side

### PARALLEL OPTICAL TRANSCEIVERS




Glenair's rugged, small form-factor parallel optical transceivers are the ideal solution for board-level optical-to-electrical conversion utilizing MT fiber optic ferrules.

Series 79 MT Ferrule Fiber Optic Connector Performance Specifications per QTP-773 and Test Report GT-19-111


Test Description	Test Results
Optical Insertion Loss, multimode (consult factory for singlemode)	50/125 $\mu$ m fiber @ 850 nm: $\leq$ 0.15 dB average; 0.31 dB typical 50/125 $\mu$ m fiber @ 1300 nm: $\leq$ 0.21 dB average; 0.38 dB typical
Temperature Cycling: per TIA/EIA-455-3, Test Condition C-2	-40°C to +85°C, 5 Cycles, 56 hours Max. CIT = .25 dB; Max. IL post-test = .30 dB
Mating Durability	First 100 cycles with CIT measured every 10 cycles Max. CIT = 0.12 dB; Max. IL post-test = 0.20 dB
Mating Durability, Extended	From 101st cycle to 500th cycle with CIT measured every 25 cycles Max. CIT = 0.21 dB; Max. IL post-test = 0.30 dB
Physical Shock 1: 50g Peak, 11 ms duration, per TIA/EIA-455-14, Test Condition E	Max. CIT = 0.14 dB; Max. IL post-test = 0.42 dB; discontinuity $\leq$ 0.5 dB @ <1 us.
Physical Shock 2: 160g Peak, 4 ms duration, per MIL-STD-202, Method 213	Max. CIT = 0.04 dB; Max. IL post-test = 0.40 dB; discontinuity $\leq$ 0.5 dB @ <1 us.
Additional Physical Shock: 300g Peak, 0.5 ms duration, per MIL-STD-883E, Method 2002.4 (30 shocks total)	Max. CIT = .15 dB; Max. IL post-test = 0.20 dB; discontinuity $\leq$ 0.5 dB @ <1 us.
Vibration 1: 5-15 Hz, .12" double amplitude, 2 hours/axis (6 hours total) per MIL-STD-202, test condition 201, Sinusoidal	Max. CIT = 0.06 dB; Max. IL post-test = 0.37 dB
Vibration 2 : 20g Peak, 10-2,000 Hz, 4 hours/axis (12 hours total) per TIA-455-11, Test Condition IV, Sinusoidal	Max. CIT = 0.08 dB; Max. IL post-test = 0.43 dB
Weight	Plug with Ferrule kit 5.5 grams · Receptacle with Ferrule kit 7.5 grams

# SERIES 79 MINIATURE MT Fiber Optic Connectors


## How To Order Series 791 MT Ferrule Fiber Optic connectors




Receptacle with female MT ferrule,  
available with or without EMI gasket



Receptacle with female MT ferrule,  
retaining plate, and banding  
platform




Plug with male MT ferrule and  
retaining plate



Plug with male MT ferrule with  
retaining plate and banding  
platform

How To Order Glenair 183-003 Series 79 MT Fiber Optic Connectors				
<b>Sample Part Number</b>	183-003	ME	-06	-L -1
<b>Basic Number</b>	Series 79 Single MT Fiber Optic Connector			
<b>Material / Finish</b>	ME = Al Alloy / Electroless Nickel    ZR = Al Alloy / Zinc Nickel, Black NF = Al Alloy / Cadmium, O.D.    Z1 = Stainless Steel / Passivate			
<b>Connector Type</b>	-06 = Plug (used with male MT ferrule) -07 = Receptacle (used with female MT ferrule) -S7 = Receptacle with EMI gasket (used with female MT ferrule)			
<b>Mounting Hardware</b>	Hardware for PLUGS -L = Hex Head Jackscrew, non-removable -B = Thru-Hole		Rear Panel Mount Jackposts for RECEPTACLES: -X = for .031" panel thickness -W = for .047" panel thickness -V = for .062" panel thickness -T = for .094" panel thickness	
<b>Retaining Plate / Banding Platform</b>	-1 = 12 or 24 channel without banding platform -2 = 12 or 24 channel with banding platform for EMI shield termination and strain relief			

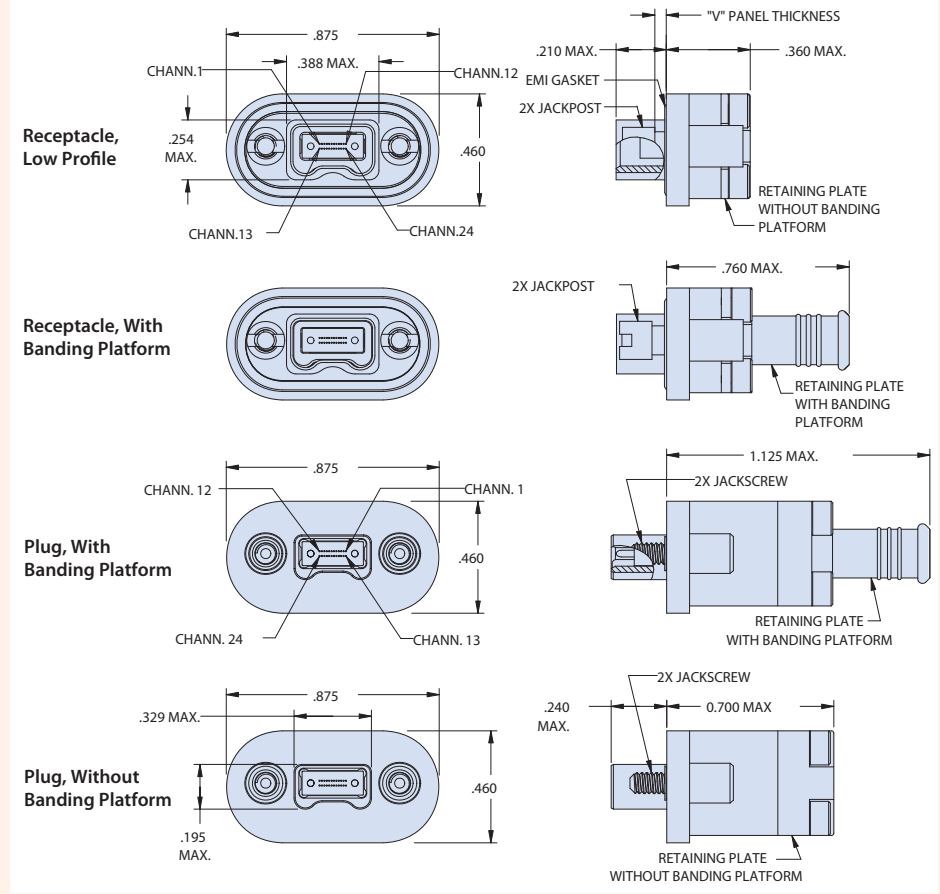

### MATERIAL/FINISH/NOTES

Mounting hardware: stainless steel / passivated


EMI gasket (optional): conductive silicone

Additional materials, finishes, connector configurations (dual and quad layouts), and hardware options are available, consult factory

# SERIES 79 MINIATURE MT Fiber Optic Connectors



## How To Order MT Ferrule Kits and Series 79 MT to MT Ferrule Cable Assembly

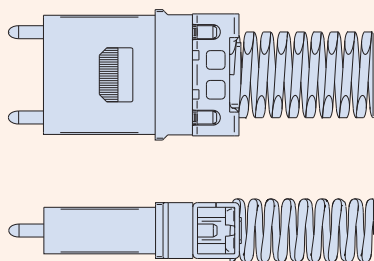


### MATERIAL/FINISH

- Ferrule: Polyphenylene Sulfide Resin
- Pin Clamp, Spring: Stainless Steel
- Boot: TPE

How To Order MT Ferrule Kits					
Sample Part Number		181-133	-126	-12	P
Basic Part Number	MT Ferrule kit				
Fiber type	-126, -1253, -1253A (See Table I)				
Number of Fibers	-12, -24 (See Table I)				
Ferrule Style	P = Male (use with Plug) S = Female (use with Receptacle)				

Table I						
Dash No.	Fiber Type	End Face	Fiber Size Core/Cladding	No. of Fibers	Ferrule Identification	Pin Clamp Identification (Male Kit only)
-126	MM	PC	50/125 62.5/125	12	M-ME12	1 Through Hole
				24	M-ME24	
-1253	SM	PC	9/125	12	E-E12	2 Through Holes
-1253A	SM	APC	9/125	12	E-E12	2 Through Holes

How To Order Series 79 MT Ferrule Fiber Optic Cable Assemblies											
Sample Part Number		FA07364	-06	-17	ME	-B4	-50	-L	-1	-0036	-L
Basic Number	Series 79 MT Ferrule Fiber Optic Cable Assembly										
A Connector Type	-06 = Sr. 79 Plug (used with male MT ferrule) -07 = Sr. 79 Receptacle (used with female MT ferrule) -S7 = Sr. 79 Receptacle with EMI gasket (used with female MT ferrule)										
B Connector Type	-06 = Sr. 79 Plug (used with male MT ferrule) -07 = Sr. 79 Receptacle (used with female MT ferrule) -S7 = Sr. 79 Receptacle with EMI gasket (used with female MT ferrule) -12 = ST Connector   -13 = FC Connector   -14 = SC Connector -15 = GC Connector   -16 = LC Connector -17 = MT Connector (male)   -18 = MT Connector (female) -19 = MTP Connector (male)   -20 = MTP Connector (female)										
Material / Finish (-06, -07, -S7)	ME = Al Alloy, Electroless Nickel   NF = Al Alloy, Cad/Olive Drab ZR = Al Alloy, Zinc-Nickel, Black   Z1 = Stainless Steel, Passivate										
Fiber Qty. / Type	-B2 = 12 bare ribbon fibers   -B4 = 24 bare ribbon fibers (Multimode only) -R2 = 12 round ribbon fibers   -R4 = 24 round ribbon fibers (Multimode only)										
Fiber Size	-09 = 9.3/125 Singlemode   -50 = 50/125 Multimode   -62 = 62.5/125 Multimode										
Mounting Hardware	Plug -L = Hex head jackscrew, non-removable -B = Thru-hole Receptacle -X = Rear-panel jackpost, .031" thickness -W = Rear-panel jackpost, .041" thickness -V = Rear-panel jackpost, .062" thickness -T = Rear-panel jackpost, .094" thickness										
Banding Platform (-06, -07, -S7)	-1 = without banding platform   -2 = with banding platform										
Length	In inches (e.g. -0036 = 36 inches)										
Protective Cover	L = supplied less covers   Omit = supplied with covers										

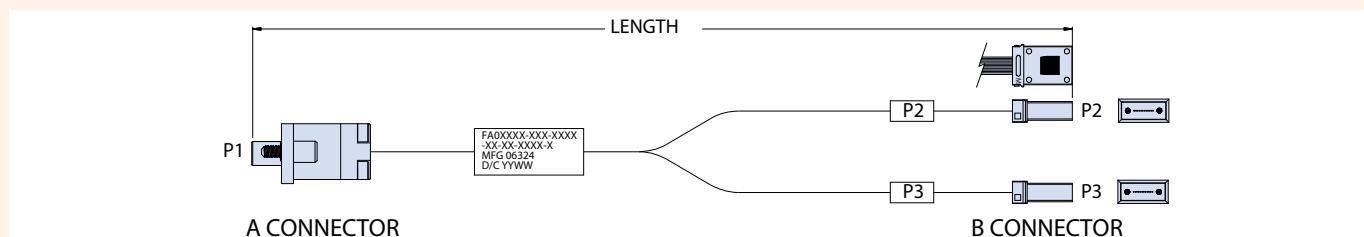

Optical performance note: Insertion loss to be less than 1.5 dB when measured at 1310 nm wavelength for singlemode, or when measured at 850 nm for multimode

RUGGEDIZED  
PCB-MOUNT  
PHOTONICS




Ruggedized High-Density, High Signal Integrity **Photonic Transceiver Modules**—up to 25Gbps Per Channel



Glenair PCB mount transceiver modules are ruggedized equivalents to SFP transceivers but with mechanical design suited to the harsh temperature and vibration environments found in free space, satellite, and other Mil-Aero applications. Optional Digital Monitoring Interface (DMI) IAW SFF 8472. High bandwidth parallel optical modules with MT datalink technology. Radiation tolerant.

- Smallest footprint available
- Jet fighter and space launch shock and vibration tested
- High-speed board interconnection — no soldering required
- CML 100 Ohm differential input and output
- -40°C to +85°C operating temperature range


**RUGGEDIZED PCB-MOUNT MODULES FOR ETHERNET, HIGH-SPEED VIDEO, AND STORAGE**




EMI shielded and radiation-tolerant transceivers




Dual transceivers, quad transmitters, quad receivers



Bi-directional transceivers



Aerospace-grade DWDM transceivers for free-space optical links





Small form-factor, high-vibration high-temperature tolerant

Parallel Optic Transceivers • RF-Over-Fiber Transceivers •  
Bi-Directional Transceivers • Radiation-Tolerant Designs

## PARALLEL OPTIC TRANSCEIVERS

Glenair parallel optic transceivers deliver up to 25Gbps per channel high-speed data in free space optics (FSO) applications. Heat tolerant and compatible with conduction cooling for space applications, the transceivers are supplied as discrete printed circuit board mount devices, or with turnkey MTP jumpers or ruggedized MT fiber optic interconnections.

- 4 X 14 to 4 X 25 Gbps per fiber (up to 100 Gbps)
- 12-channel Tx and Rx with 10Gbps/channel
- Compatible with MTP optical connector
- Supports 12-fiber ribbon cable
- SiGe and GaAs optoelectronic ICs
- Hermetic opto-electronic hybrid
- Conduction-cooling for space applications
- 46 Grms, 650G shock
- -40°C to +85°C case temp
- Heavy ion radiation-tested

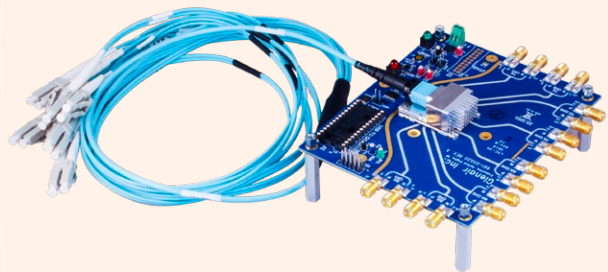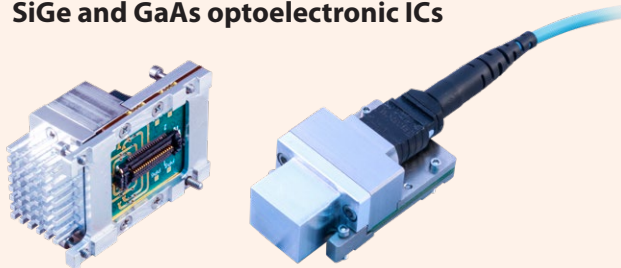

Convection cooling (left) and conduction cooling (right) designs as well as custom heat dissipation designs are available.  
050-346 parallel optical transceiver, 4 X 10 – 14 Gbps  
0500-3007 parallel optical transceiver, 0.1 – 25 Gbps

Available evaluation boards: 050-346 parallel optic transceiver with MT-to-39029 fiber optic terminations

## RF-OVER-FIBER TRANSCEIVERS

Radio Frequency over Fiber systems integrate wireless radio frequency (RF) transmissions and fiber optic datalinks into a single system. Benefits include lower transmission loss (attenuation) as well as reduced sensitivity to electromagnetic noise. Glenair ruggedized, low-noise, shielded RF-over-Fiber solutions have a 2MHz to 3.5GHz RF bandwidth and can be embedded inside-the-box or incorporated into standalone copper-to-fiber media converters for environmental applications.

- 2MHz – 3.5 GHz antenna signal distribution
- High-frequency units in excess of 20 GHz
- High-vibration PCB mount solution
- -40°C to +85°C operating case temperature
- High Spurious Free Dynamic Range (SFDR) link
- APC fiber optic contact standard
- Integrated high-speed PIN photo diode and low-noise RF amplifiers

### RF over Fiber PCB-Mount Component Selection Guide

<b>050-400</b> PCB Mount RF-over-Fiber Transceiver 20MHz to 3.5 GHz	<b>050-404</b> PCB Mount RF-over-Fiber Transmitter 2 MHz – 3.5 GHz	<b>050-405</b> PCB Mount RF-over-Fiber Receiver 2 MHz – 3.5 GHz	<b>050-406</b> PCB Mount RF-over-Fiber Transmitter 2 MHz – 3.5 GHz Low-Noise configuration	<b>050-407</b> PCB Mount RF-over-Fiber Receiver 2 MHz – 3.5 GHz Low-Noise configuration

PCB-Mount Modules	Glenair Part Number	ETHERNET										VIDEO				FIBRE CHANNEL				BUS	OTHER
		100BASE-FX	100BASE-SX	100BASE-LX	100BASE-LX10	100BASE-EX	100BASE-BX10	10GBASE-SR	10GBASE-LR	10GBASE-LX4	40GBASE-SR4	100GBASE-SR4	HDMI	DVI/ARINC 818	SMPTE HD-SDI	3G-SDI	1x Fibre Channel	2x Fibre Channel	4x Fibre Channel		
050-315		•										•	•			•	•	•		•	
050-316		•										•	•			•	•	•		•	
050-317		•										•	•			•	•	•		•	
050-318			•	•								•	•			•				•	
050-319			•	•								•	•			•	•			•	
050-320			•	•								•	•			•	•	•		•	
050-321	•																				•
050-324			•	•	•							•	•			•	•	•		•	
050-325			•	•	•							•	•			•	•	•		•	
050-327							•					•	•			•	•	•	•		
050-328								•				•	•			•	•	•	•		
050-331														•	•						
050-332														•	•						
050-333		•										•	•			•	•	•		•	
050-336		•										•	•			•	•	•		•	
050-337		•										•	•			•	•	•		•	
050-340												•	•			•					
050-341								•				•	•			•	•	•	•		
050-342			•	•								•	•			•	•				
050-343												•	•			•	•	•	•	•	
050-346							•			•						•	•	•	•		
050-348		•										•	•			•	•	•		•	
050-352	•																				•
050-354			•	•								•	•			•	•	•		•	
050-356			•	•								•	•			•	•			•	
050-357														•	•						
050-358														•							
050-360		•										•	•			•	•	•		•	
050-361		•										•	•			•	•	•		•	
050-362		•										•	•			•	•	•		•	
050-363		•										•	•			•	•	•		•	
050-364		•										•	•			•	•	•		•	
050-369							•	•				•	•			•	•	•	•		
050-373		•										•	•			•	•	•		•	
050-374		•										•	•			•	•	•		•	
050-375		•										•	•			•	•	•		•	
050-376									•			•	•			•	•	•	•	•	
050-379														•							
050-385		•										•	•			•	•	•		•	
050-386							•					•	•			•	•	•	•		
050-389														•	•						
050-394						•						•	•			•					
050-397*						•						•	•			•					
0500-3007										•		•	•			•	•	•	•		
0500-3011						•						•	•			•	•	•	•		

DESCRIPTION	DATARATE (Gbps)	WAVE LENGTH (nm)	LASER TYPE	RECEIVER TYPE	MAX. DISTANCE (km)	PACKAGE TYPE
Transceiver	0.1 - 5	850	VCSEL	PIN TIA	0.5	1
Dual Transmitter	0.1 - 5	850	VCSEL	N/A	0.5	1
Dual Receiver	0.1 - 5	850	N/A	PIN TIA	0.5	1
Transceiver	0.1 - 1.25	1310	FP	PIN TIA	10	1
Dual Transmitter	0.1 - 2.5	1310	FP	N/A	10	1
Dual Receiver	0.1 - 4.25	1310	N/A	PIN TIA	10	1
Transceiver	0.05 - 0.2	1300	LED	PIN TIA	20	1
Transceiver	0.1 - 2.5	1310	DFB	PIN TIA	40	1
Dual Transmitter	0.1 - 2.5	1310	DFB	N/A	40	1
Transceiver	1 - 10.5	850	VCSEL	PIN TIA	0.4	1
Transceiver	1 - 10.5	1310	DFB	PIN TIA	10	1
SMPTE Dual Transmitter	1.5 - 2.97	850	VCSEL	N/A	1	1
SMPTE Dual Receiver	1.5 - 2.97	850	N/A	PIN TIA	1	1
Dual Transceiver	0.1 - 5	850	VCSEL	PIN TIA	0.5	2
Quad Transmitter	0.1 - 5	850	VCSEL	N/A	0.5	2
Quad Receiver	0.1 - 5	850	N/A	PIN TIA	0.5	2
BIDI Transceiver	0.1 - 1.25	1310/1550	FP/FP	PIN TIA	4	1
BIDI Transceiver	1 - 10	1270/1330	DFB/DFB	PIN TIA	10	1
CWDM Transceiver	0.1 - 2.5	CWDM	DFB	PIN TIA	20	1
CWDM Transceiver	1 - 10.5	CWDM	DFB	PIN TIA	10	1
Parallel Optical Transceiver	4 X 10 - 14	850	VCSEL	PIN TIA	0.5	3
EMI Shielded Transceiver	0.1 - 5	850	VCSEL	PIN TIA	0.5	1
Transceiver	0.05 - 0.2	1310	FP	PIN TIA	10	1
Transceiver	2.5 - 5	1310	FP	PIN TIA	10	1
CWDM Dual Transmitter	0.1 - 2.5	CWDM	DFB	N/A	10	1
SMPTE Dual Receiver	1.5 - 2.97	1250-1600	VCSEL	PIN TIA	10	1
SMPTE CWDM Dual Transmitter	1.5	CWDM	DFB	N/A	10	1
Radiation-Tolerant Dual Transmitter	0.1 - 5	850	VCSEL	N/A	0.5	1
Radiation-Tolerant Dual Receiver	0.1 - 5	850	VCSEL	PIN TIA	0.5	1
Radiation-Tolerant Transceiver	0.1 - 5	850	VCSEL	PIN TIA	0.5	1
Radiation-Tolerant Quad Transmitter	0.1 - 5	850	VCSEL	N/A	0.5	2
Radiation-Tolerant Quad Receiver	0.1 - 5	850	VCSEL	PIN TIA	0.5	2
Transceiver MMF TX · SMF RX	1 - 10	850 TX 1310 RX	VCSEL	PIN TIA	10	1
Dual-Transceiver (4 mounting screws)	0.1 - 5	850	VCSEL	PIN TIA	0.5	2
Quad Transmitter (4 mounting screws)	0.1 - 5	850	VCSEL	N/A	0.5	2
Quad Receiver (4 mounting screws)	0.1 - 5	850	N/A	PIN TIA	0.5	2
CWDM Dual Transmitter	1 - 10	CWDM	DFB	N/A	10	1
SMPTE CWDM Transceiver	1.5	CWDM	DFB	PIN TIA	10	1
Radiation-Tolerant Dual Transceiver	0.1 - 5	850	VCSEL	PIN TIA	0.5	2
Dual Transmitter	1 - 10.5	850	VCSEL	PIN TIA	0.4	1
SMPTE Transceiver	1.5 - 2.97	850	VCSEL	PIN TIA	1	1
BIDI Transceiver	0.1 - 2.5	1310/1490	DFB/DFB	PIN TIA	10	1
BIDI Transceiver	0.1 - 1.25	1310/1550	DFB/DFB	PIN TIA	10	1
Parallel Optical Transceiver	4 X 25	850	VCSEL	PIN TIA	0.1	3
DWDM EML FSO Transceiver	11.3	DWDM	EML	PIN TIA	40	1



## Ruggedized **Size #8** **Photonic Transmitter and** **Receiver Contacts and** Connectors for Ethernet, Video and High-Speed Data



Size 8 photonic contacts transmit and receive differential CML or LVPECL electrical signals over Multimode fiber optic cable. Transmitters consist of a 850nm VCSEL laser or 1300nm LED with temperature compensation circuit. Receivers consist of a PIN Photo Detector, a Transimpedance Amplifier with automatic gain control circuit, and a Limiting Amplifier.

Differential output data signals are LVPECL or CML compatible.



Patented photonic contacts integrate into Glenair circular and rectangular connectors including SuperNine® (D38999 Series III), ARINC 801, ARINC 404, and others.


- Fast and Gigabit Ethernet, DVI, HDMI video capable transmitter and receiver-equipped contacts
- ARINC 664, 801, 803, 804 and 818 standard compliant
- Link distances up to 550 meters, multimode
- Single, 3.3 V power supply
- For use in ARINC 600 and other size #8 cavity-equipped connectors
- Current offerings include 1.25mm ARINC 801 and 2.5mm ELIO® solutions

RUGGEDIZED

# Photonic Contacts and Connectors for Ethernet, Video and High-Speed Data



## 050-301 SIZE 8 CAVITY OPTO-ELECTRONIC CONTACTS, 100MBPS TO 5GBPS, MMF, 3.3V



050-301  
Radiation Tolerant

- Front-release, front-insert, front-removable Size #8 OE converter designed for ARINC 600
- ARINC 664, 801, 803, 804, and 818 Standard Compliant
- Data rates from 100Mbps to 5.00Gbps
- Supports Fast and Gigabit Ethernet, AFDX, 1x/2x Fibre Channel, DVI, DHMI, SFPDP, Serial Rapid I/O (sRIO)
- 100 ohms differential CML inputs with Tx Fault and Tx Disable
- Link distances up to 550 meters with multimode 50/125µm or 62.5/125 µm fiber
- Single 3.3V power supply
- ARINC 801 1.25mm ceramic fiber ferrule
- Solutions available in 38999 style connectors
- -40°C to +85°C Operating Case Temperature
- Evaluation fixtures available

## 050-307 SIZE 8 CAVITY OPTO-ELECTRONIC CONTACTS, 100MBPS TO 5GBPS, MMF, 3.3V



050-307  
Radiation Tolerant

- Front-release, front-insert, front-removable Size #8 OE converter designed for ARINC 600
- ARINC 664, 801, 803, 804, and 818 Standard Compliant
- Data rates from 100Mbps to 5 Gbps
- Supports Fast and Gigabit Ethernet, AFDX, 1x/2x Fibre Channel, DVI, DHMI, SFPDP, Serial Rapid I/O (sRIO)
- 100 ohms differential CML inputs with Tx Fault and Tx Disable
- Link distances up to 550 meters with multimode 50/125µm or 62.5/125 µm fiber
- Single 3.3V power supply
- ELIO 2.5mm ceramic fiber ferrule
- Solutions available in 38999 style connectors
- Mates with ELIO 2.5mm Termini
- -40°C to +85°C Operating Case Temperature
- Evaluation fixtures available
- Compatible with Souriau ELIO AQ6S Quadrax Adapter


## 050-367 SIZE 8 CAVITY OPTO-ELECTRONIC CONTACTS, 3G-SDI AND HD-SDI, MMF, 3.3V



050-367  
(patented)

- SMPTE EG 34:2004 Compliant to Pathological Conditions CASE 1, CASE 2 and CASE 3.
- SMPTE ST 297:2015 (3G-SDI & HD-SDI)
- SMPTE 424 Compliant (3G-SDI)
- SMPTE 292 Compliant (HD-SDI)
- SFP Compatible Electrical Input signal levels
- 850nm VCSEL support 3G-SDI & HD-SDI
- Industry standard CML input and outputs that make for simple integration on customer host PCB
- Front-release, front-insert, front-removable
- Fits size 8 quadrax cavity for ARINC 600
- Solutions available in 38999 style connectors
- -40°C to +85°C Operating Case Temperature
- Evaluation fixtures available

## 050-399 SIZE 8 CAVITY OPTO-ELECTRONIC CONTACTS, DC TO 1 MBPS, MMF, 3.3V




050-399  
(patented)

- Front-release, front-insert, front-removable Size #8 OE converter designed for ARINC 600
- ARINC 664, 801, 803, 804, and 818 Standard Compliant
- Data rates from DC to 1 Mbps
- Supports RS232, RS422, and RS485 data rates
- DC coupled transmitter and receiver
- Link distances up to 2Km
- Single 3.3V power supply
- ARINC 801 1.25mm ceramic fiber ferrule
- Solutions available in 38999 style connectors
- -40°C to +85°C Operating Case Temperature
- Evaluation fixtures available

RUGGEDIZED  
PHOTONIC  
CONTACTS AND  
CONNECTORS



Small Form-Factor, Harsh-  
Environment **Photonic  
Contacts and Connectors**  
for Box I/O Fiber-to-Copper  
Media Conversion

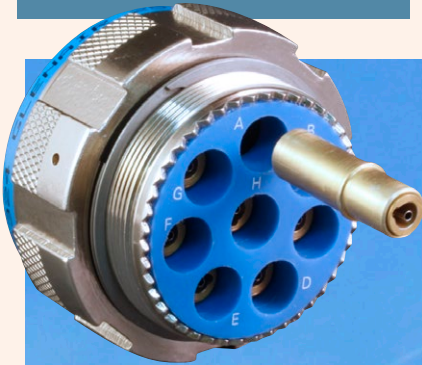

Special size #8 cavity adapters facilitate construction of standard fiber optic plug connectors that intermate with size #8 optoelectronic transceiver contacts



Glenair size #8 optoelectronic contacts are easily housed in a range of circular and rectangular connectors for fast/gigabit Ethernet, DVI and HDMI video, and other high-speed data transfer protocols. Special size #8 cavity adapters are available to enable construction of compatible plug connectors on the cable side.

- 2.5mm ELIO® solution for multimode Ethernet, video, and high-speed data applications
- 1.25mm ARINC 801 multimode fiber optic termini solution for Ethernet, video, and high-speed data
- Hybrid high-speed layouts with Size #8 Optoelectronic contacts and Glenair Signature El Ochito high-speed Octaxial contacts








Glenair SuperNine D38999 Series III type optoelectronic connectors populated with size #8 contacts, ready for immediate assembly in cable or I/O to circuit board applications

ELIO® is a registered trademark of SOURIAU

# Photonic Contacts and Connectors for Ethernet, Video and High-Speed Data



Optoelectronic Connector Selection Guide		
	<b>050-313</b>	Optoelectronic Transceiver, MIL-DTL-38999 Type 2.5mm ELIO® Compatible 100Mbps – 4.25Gbps
	<b>050-304</b>	D38999 Series III Type Active Receptacle Connector with Glenair Size 8 Optoelectronic Contacts 050-304 CS Wall Mount, Clinch Nut 050-304 00 Wall Mount, Slotted 050-304 07 Jam Nut 059-0001 - D38999 Size 8 Cavity Adapter Kit (Includes ARINC 801 Style Terminus)
	<b>050-392</b>	D38999 Series III Type Active Hybrid Receptacle Connector with Glenair Size 8 Optoelectronic and Electrical Contacts 050-392 07 Jam Nut 059-0001 - D38999 Size 8 Cavity Adapter Kit (Includes ARINC 801 Style Terminus)
	<b>050-355</b>	D38999 Series III Type Active Receptacle Connector with Glenair Size 8 Optoelectronic Contacts. 050-355 CS Wall Mount, Clinch Nut 050-355 00 Wall Mount, Slotted 050-355 07 Jam Nut 059-0001 - D38999 Size 8 Cavity Adapter Kit (Includes ARINC 801 Style Terminus)
	<b>0500-3004</b>	D38999 Series III Type Active Hybrid Receptacle Connector with PCB standoffs, Glenair Size 8 Optoelectronic contacts, and electrical contacts Compatible with 050-301 and 050-367 contacts 059-0001 - D38999 Size 8 Cavity Adapter Kit (Includes ARINC 801 Style Terminus)
	<b>0500-3005</b>	D38999 Series III Type Active Hybrid Receptacle Connector with Glenair Size 8 Optoelectronic Contacts, and El Ochito Contacts. 0500-3005 CS Wall Mount, Clinch Nut 0500-3005 00 Wall Mount, Slotted 0500-3005 07 Jam Nut
	<b>0500-3001</b>	D-Sub Active Receptacle Connector with Glenair Size 8 Optoelectronics Contacts. Compatible 050-301, 050-367, 050-399, and 0500-3015 contacts 1.25 Gbps – 5.00 Gbps / HD-SDI and 3G-SDI / DC to 50 Mbps
	<b>0500-3024</b>	D-Sub Active Receptacle Connector with 2 × Glenair Size 8 Optoelectronics Contacts. Compatible 050-301 and 050-367 contacts 1.25 Gbps – 5.00 Gbps
	<b>0500-3034</b>	D-Sub Active Receptacle Connector with 2 × Glenair Size #8 Optoelectronics Contacts. Compatible 050-301, 050-367, 050-399, and 0500-3015 contacts 1.25 Gbps – 5.00 Gbps / HD-SDI and 3G-SDI / DC to 50 Mbps



# MISSION-CRITICAL INTERCONNECT SOLUTIONS

## Glenair, Inc.

1211 Air Way • Glendale, California • 91201-2497

Telephone: 818-247-6000 • Fax: 818-500-9912 • sales@glenair.com

[www.glenair.com](http://www.glenair.com)

### Glenair Power Products Group

20 Sterling Drive  
Wallingford, CT  
06492

Telephone:  
203-741-1115  
Facsimile:  
203-741-0053  
sales@glenair.com

### Glenair UK Ltd

40 Lower Oakham Way  
Oakham Business Park  
Mansfield, Notts  
NG18 5BY England

Telephone:  
+44-1623-638100  
Facsimile:  
+44-1623-638111  
sales@glenair.co.uk

### Glenair Microway Systems

7000 North Lawndale Avenue  
Lincolnwood, IL  
60712

Telephone:  
847-679-8833  
Facsimile:  
847-679-8849

### Glenair Nordic AB

Gustav III : S Boulevard 42  
SE-169 27 Solna  
Sweden

Telephone:  
+46-8-50550000  
sales@glenair.se

### Glenair GmbH

Schaberweg 28  
61348 Bad Homburg  
Germany

Telephone:  
06172 / 68 16 0  
Facsimile:  
06172 / 68 16 90  
info@glenair.de

### Glenair Iberica

C/ La Vega, 16  
45612 Velada  
Spain

Telephone:  
+34-925-89-29-88  
Facsimile:  
+34-925-89-29-87  
sales@glenair.es

### Glenair Italia S.p.A.

Via Del Lavoro, 7  
40057 Quarto Inferiore –  
Granarolo dell'Emilia  
Bologna, Italy

Telephone:  
+39-051-782811  
Facsimile:  
+39-051-782259  
info@glenair.it

### Glenair France SARL

7, Avenue Parmentier  
Immeuble Central Parc #2  
31200 Toulouse  
France

Telephone:  
+33-5-34-40-97-40  
Facsimile:  
+33-5-61-47-86-10  
sales@glenair.fr

### Glenair Korea

6-21Tapsil-ro 58beon-gil  
Giheung-gu, Yongin-si  
Gyeonggi-do  
Republic of Korea

Telephone:  
+82-31-8068-1090  
Facsimile:  
+82-31-8068-1092  
sales@glenair.kr