

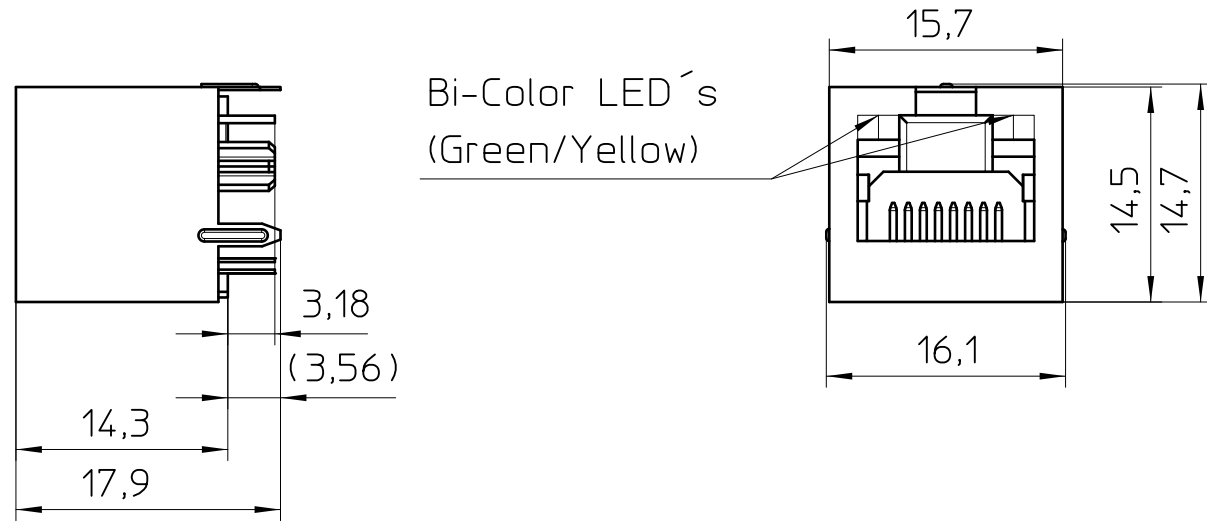
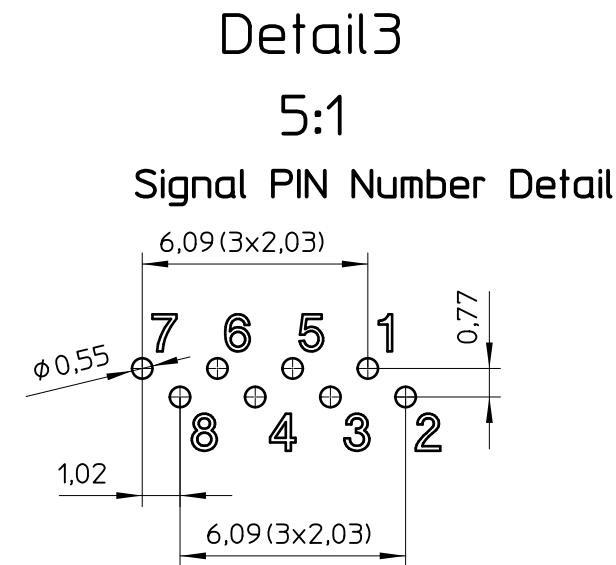


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

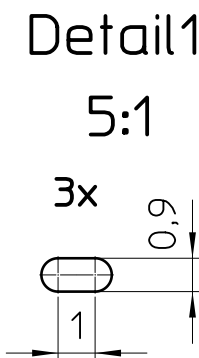

PCB drill hole dimensions
(seen from component side)

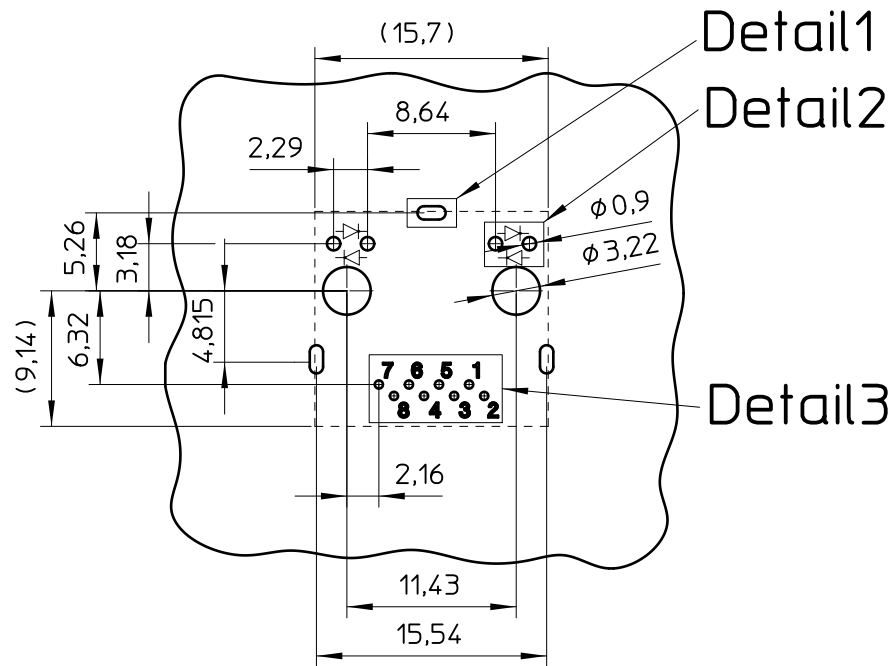

PCB recommended layout for THR and solder wave
copper layer and solder paste mask (150 μ m)

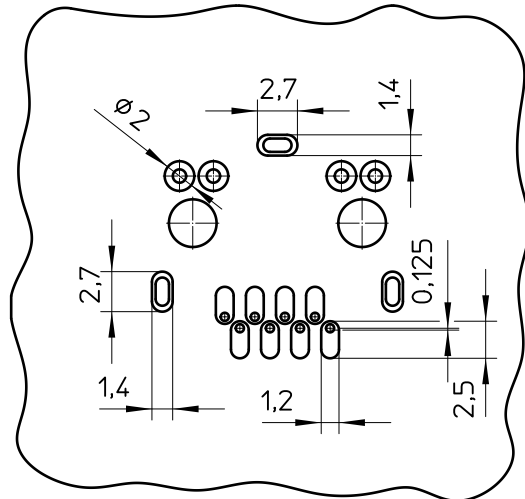

LED- Specifications				
Bi-Color LED		Forward Voltage (Max)	*Forward Voltage (Typ)	Wavelength
Green/Yellow	Green	2,5 V	2,2 V	565 nm
	Yellow	2,5 V	2,1 V	590 nm

* With a forward current of 20 mA (Typ)

 DIN A3		document-No. / RI 01230415 / 05	date 08.04.2022	scale 2:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm] - EN ISO 291 23/50
		document-type TECDCOC 2D_Productfamily			
		description CUC-IND-J1ST-S/R4LS-LED			
page 1	of 1				