



280 PLUG FINGER





MYLAR INSULATOR



SLEEK HANDLE



RUBBER FLEX RELIEF
(SEE TABLE)

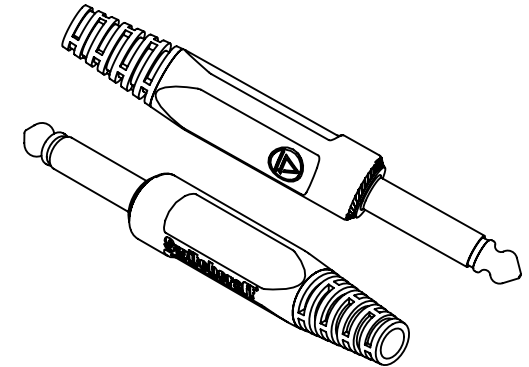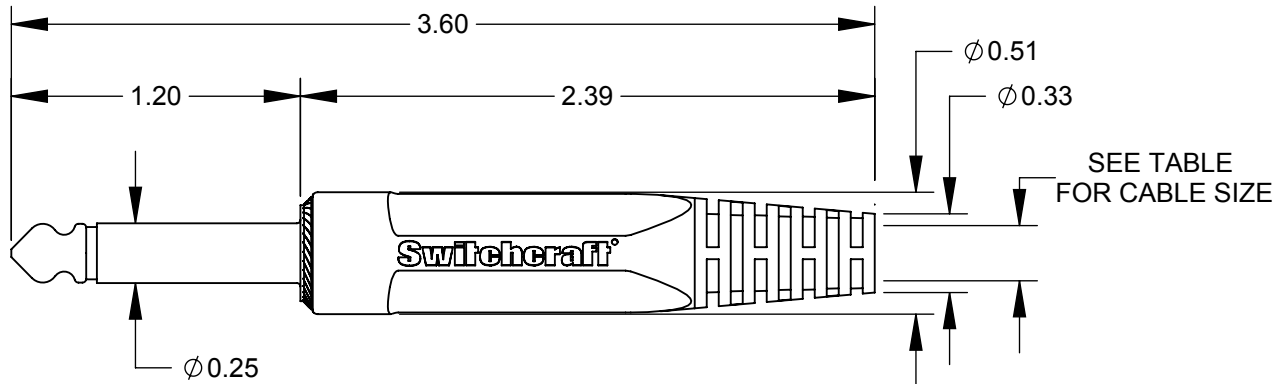

NOTES:

1. PLUG FINGER SAME AS 280
2. PLUG FINGER, HANDLE, AND STRAIN RELIEF SHIPPED UNASSEMBLED.
3. ASSEMBLE STRAIN RELIEF TO HANDLE BEFORE INSERTING CABLE.
4. THIS PRODUCT IS RoHS COMPLIANT.

PARTNUMBER	PART REV	RECOMMENDED CABLE RANGE FOR STRAIN RELIEF
280F	0A	$\varnothing 0.220 - \varnothing 0.190$
280FL	0A	$\varnothing 0.250 - \varnothing 0.220$

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.							
						SIZE *	WIDTH *	MULT *	LBS/M *	TEMPER *			
						FINISH *			MATERIAL *				
						SPEC No. *			SPEC No. *				
						FIRST USED ON *		SCALE 5:4		Switchcraft®			
						DATE DRAWN	BY	CHKD	APVD				
0A	PRELIMINARY	6/19/17	*	*		6/19/17	AB	AB 6/19/17	*				
										SHEET 1 OF 1			
REV	ECO NUMBER	DATE	BY	APVD	NAME					PART No.	REV		
REVISIONS					DO NOT SCALE DRAWING					280 FLEX, RoHS		280F - 280FL	0A