


Power Inductor


Model HA55

- Operating Temperature Range -40°C to +155°C
- High inductance, high efficiency and excellent current handling
- Use as DC-DC converter and in high current applications, suitable for industrial as well as automotive applications
- RoHS Compliant
- AEC-Q200 Certified

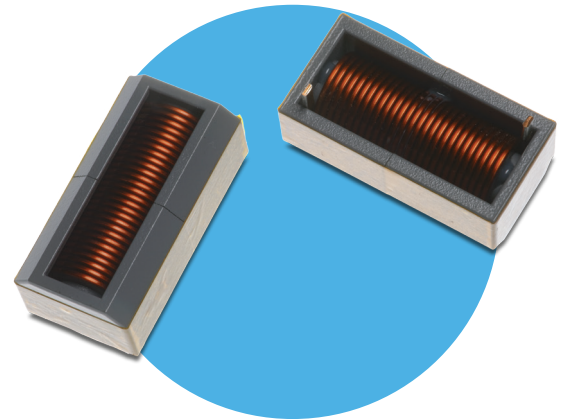

All parts are Pb free and comply with EU RoHS Directive 2011/65/EU with amendment EU 2015/863 (RoHS 3)

Electrical Schematic

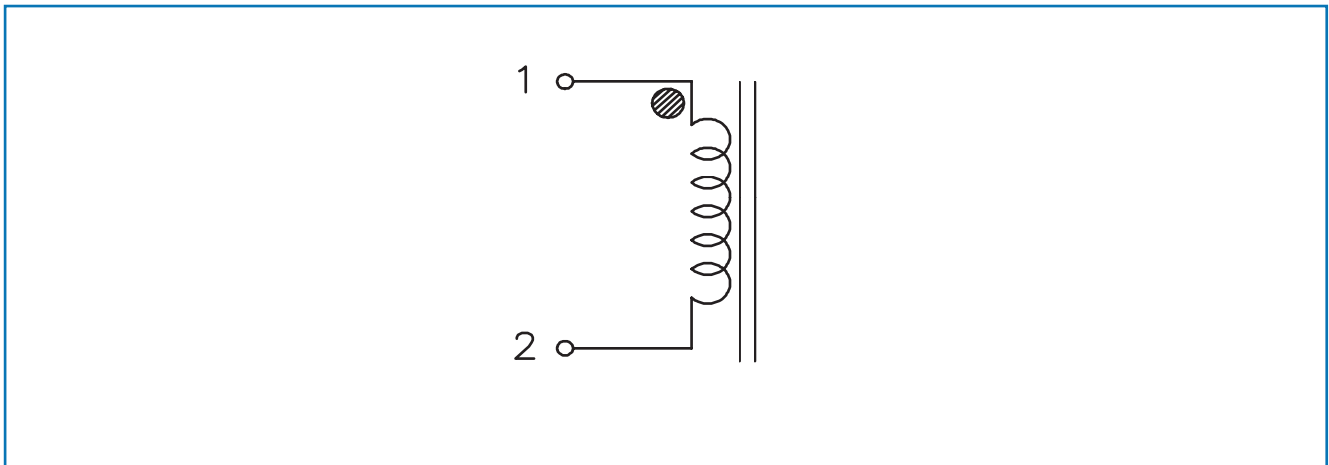

Specifications @ 25°C

Part Number	Inductance 100kHz, 100mV (μH) TYP	@Rated Current Inductance 100kHz, 100mV (μH) TYP	I _{rated} Rated Current (A)	I _{sat} Saturation Current (A)	DC Resistance		SRF MHz Typ	Figure
					mΩ Typ	mΩ Max		
HA55-3623200LF	20.00	14.50	33.00	35.0	3.35	3.85	14.0	1
HA55-3023115LF	11.50	8.24	39.00	43.0	2.30	2.76	33.0	2
HA55-2223070LF	7.00	5.33	40.00	48.0	1.70	2.00	33.0	3
HA55-3023130LF	13.00	9.33	37.00	40.0	2.50	3.25	19.0	4
HA55L-3623220LF	22.00	13.00	34.00	26.0	3.35	3.85	12.0	1
HA55L-3023135LF	13.50	8.42	39.00	30.0	2.30	2.76	33.0	2
HA55L-2223088LF	8.83	5.52	41.00	33.0	1.70	2.00	36.0	3
HA55L-3023163LF	16.30	9.38	37.00	27.0	2.50	3.25	25.0	4
HA55L-3623400LF	40.00	24.00	26.00	20.0	5.70	6.20	8.25	1

Notes : (1) Inductance is measured at 100kHz, 0.1Vrms, 0Adc.
 (2) The rated current is the approximate DC current at which ΔT is approximately 60°C. This current is determined by soldering the unit on a typical application PCB, and then applying the current to the unit for 30 minutes.
 (3) Isat is the saturation current at which inductance rolls off approximately 30% from its initial unbiased inductance value.


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
 All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


MODEL HA55

Electrical Characteristics


HA55-3623200LF

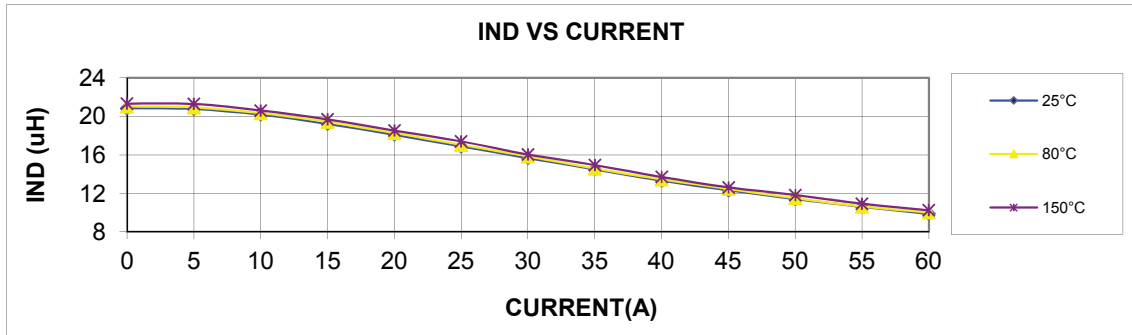


HA55-3023115LF

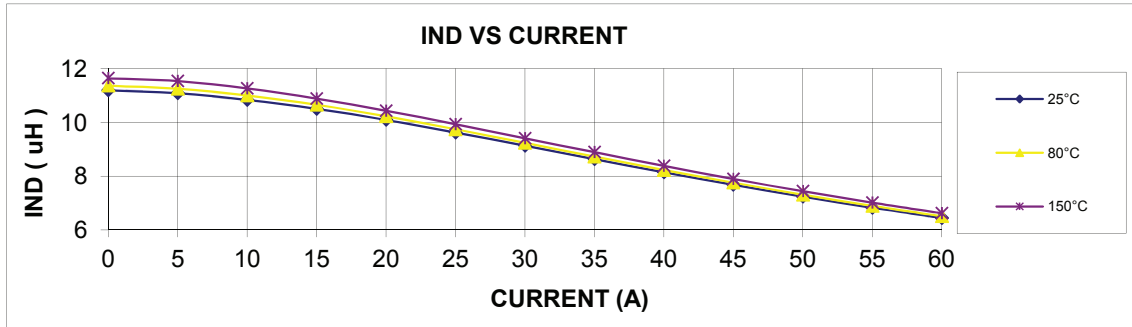

HA55-2223070LF

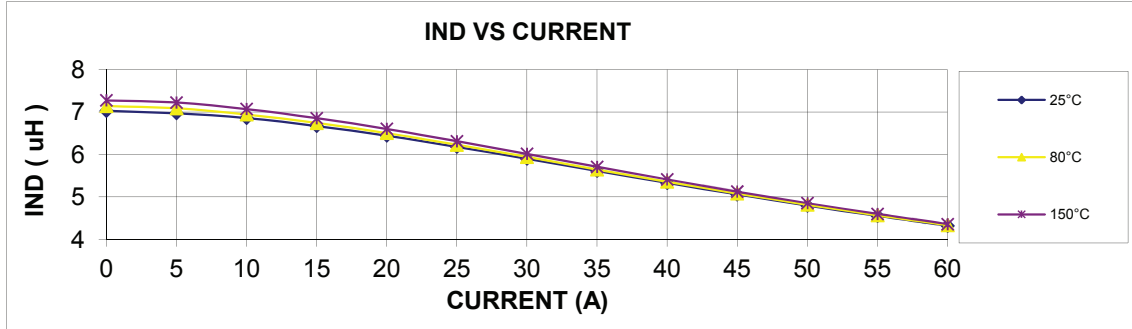

HA55-3023130LF

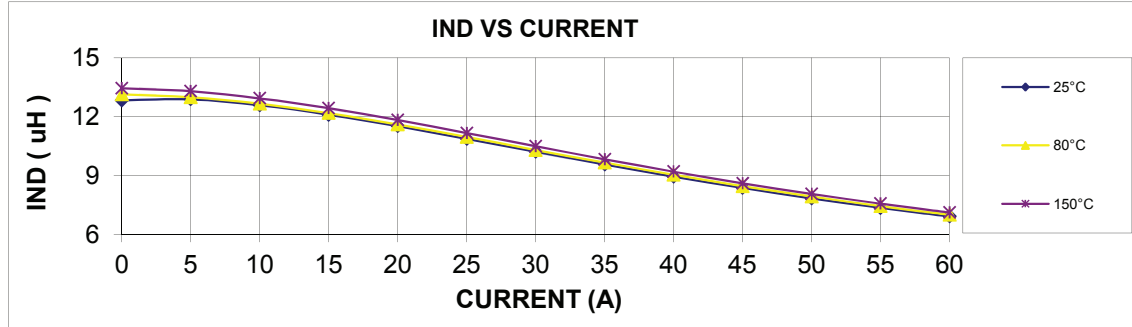


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

MODEL HA55

Electrical Characteristics

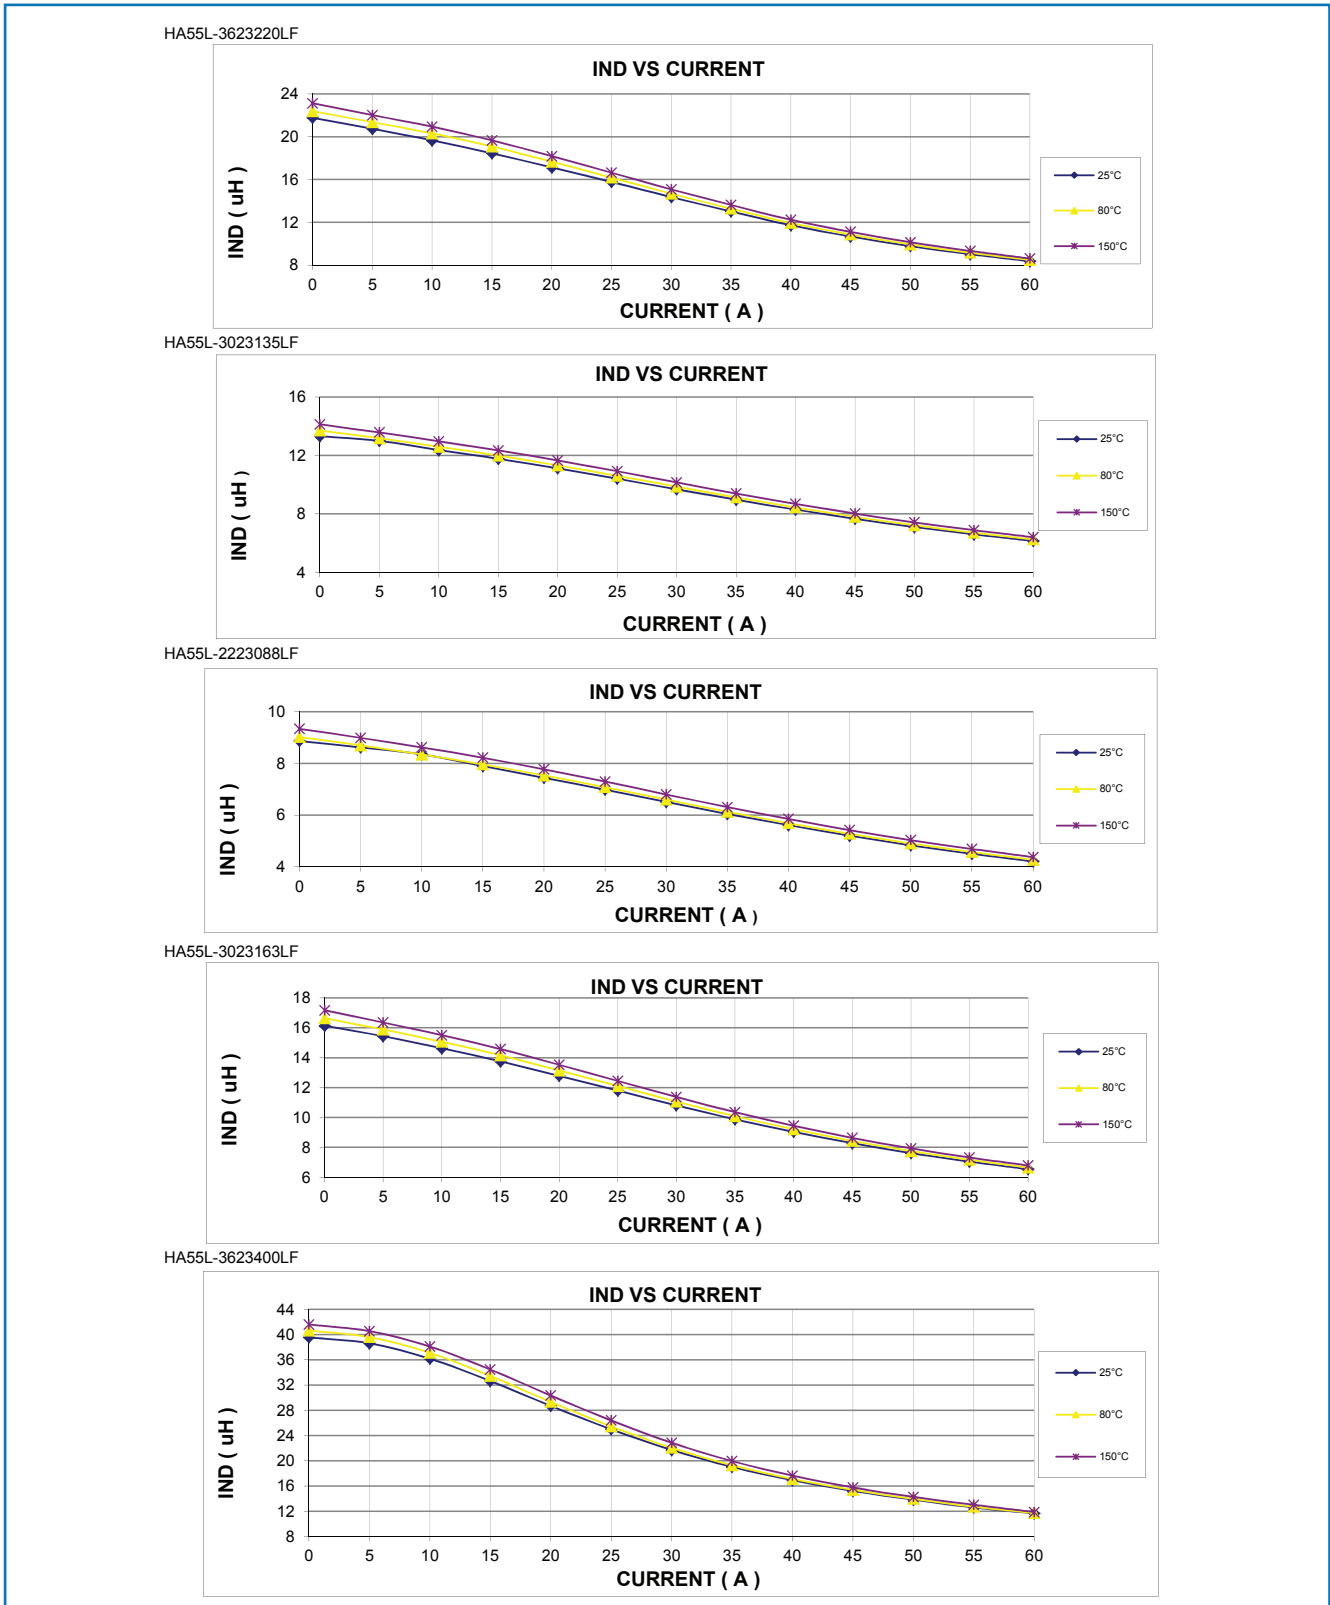


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


MODEL HA55

Electrical Characteristics


HA55-3623200LF

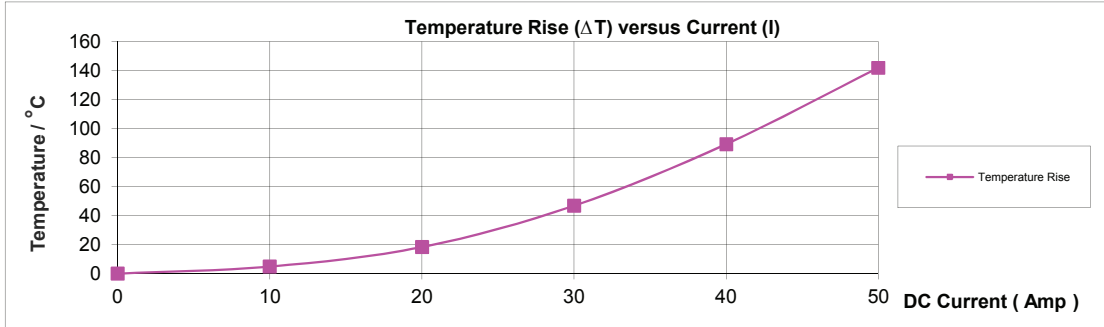


HA55-3023115LF

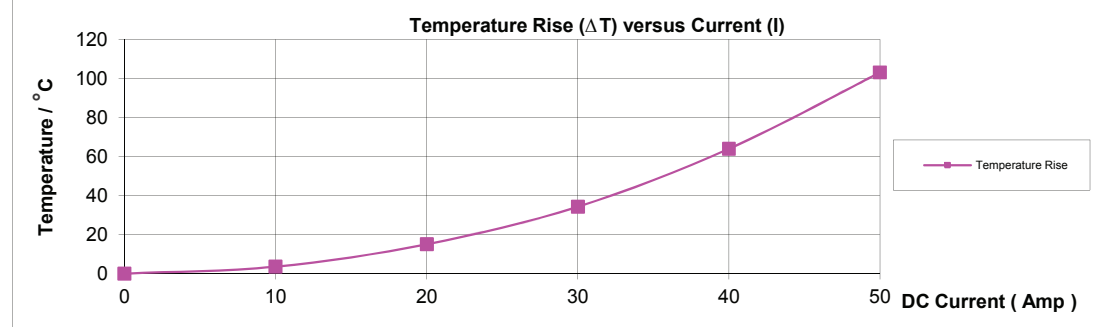

HA55-2223070LF

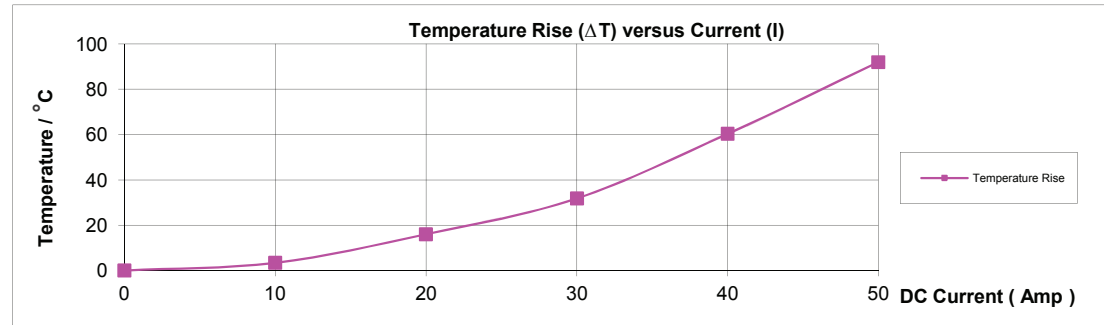

HA55-3023130LF





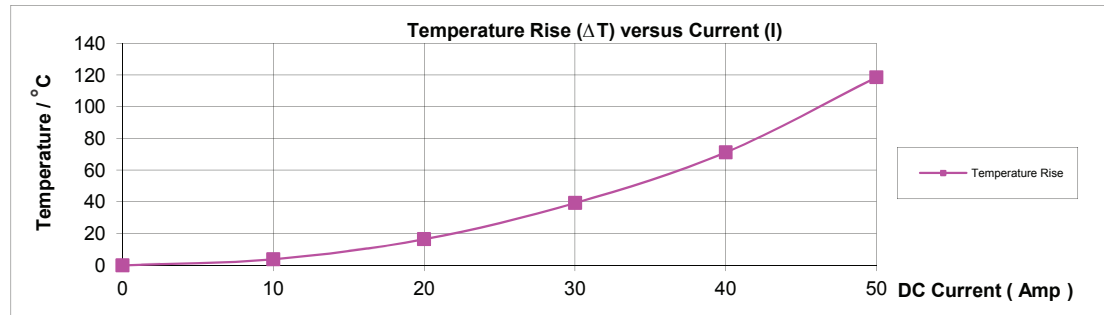


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

MODEL HA55

Electrical Characteristics

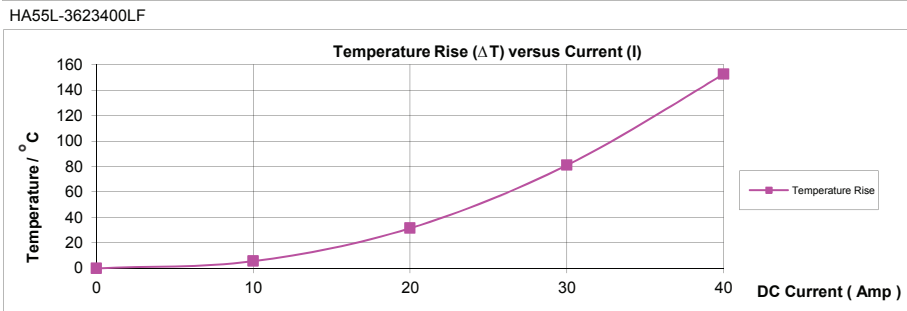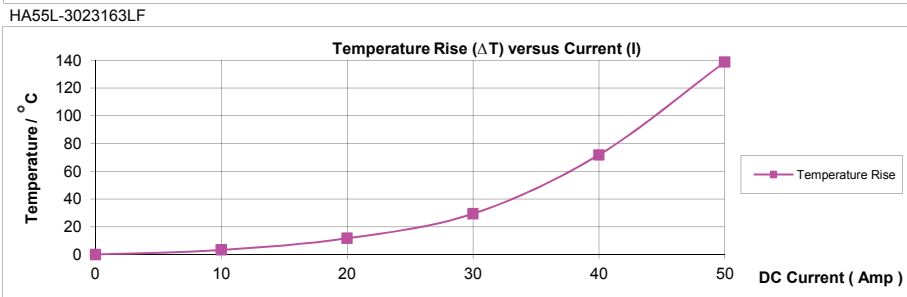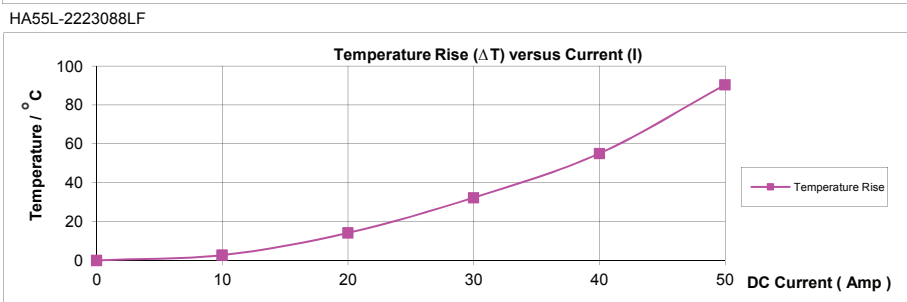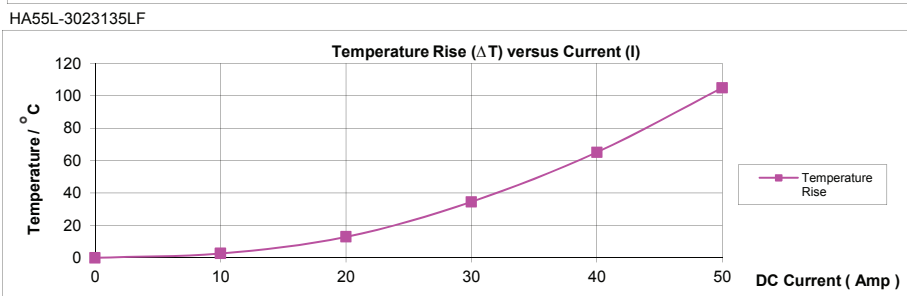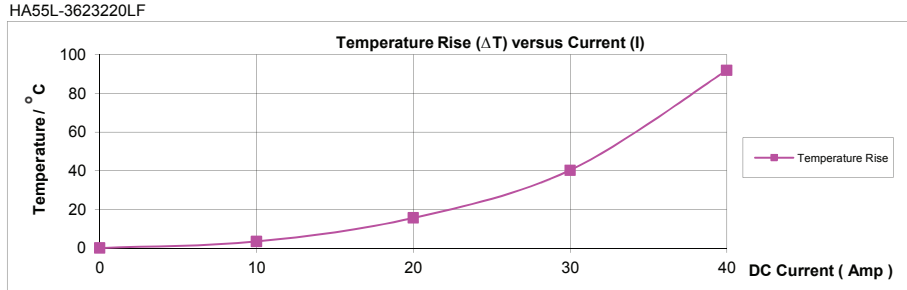


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

MODEL HA55

Mechanical Outline (mm)

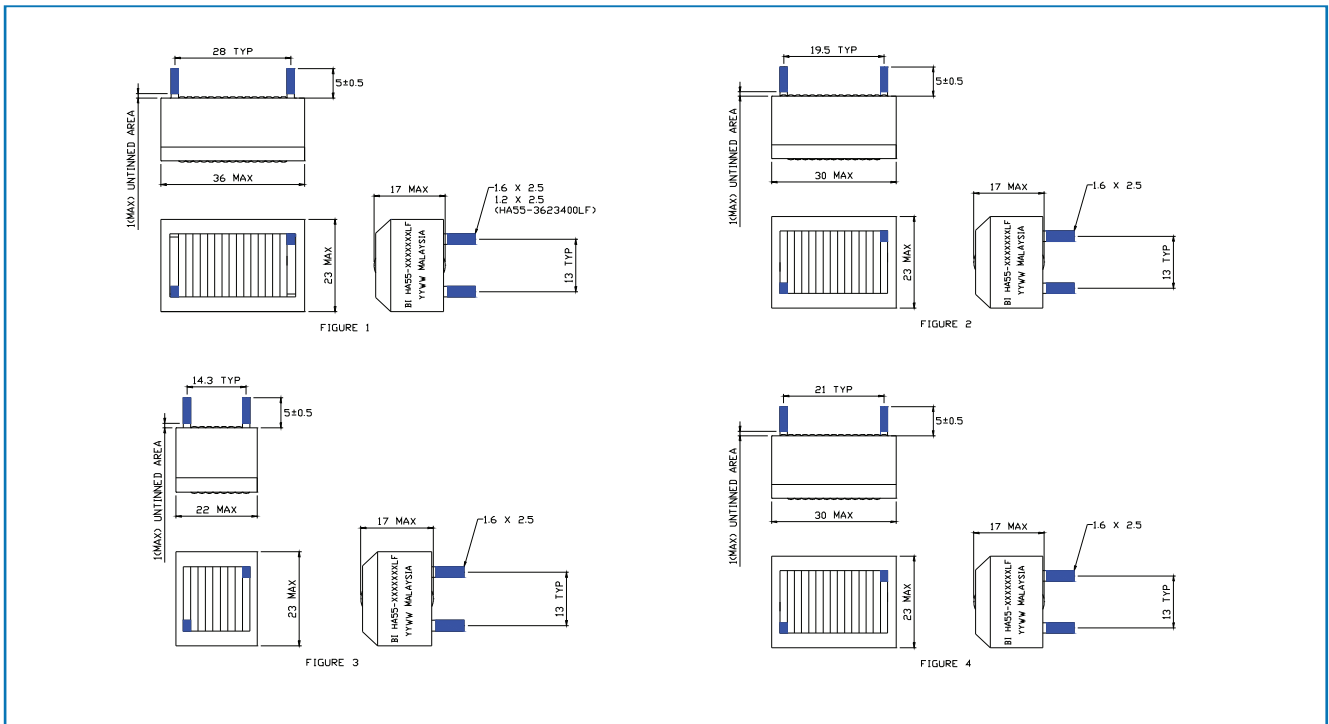


Packaging

(Packed in compact PE foam)

- 1) 1 shipping carton 72pcs (FOR CASE 3623)
- 2) 1 shipping carton 108pcs (FOR CASE 3023)
- 3) 1 shipping carton 144pcs (FOR CASE 2223)

Ordering Information

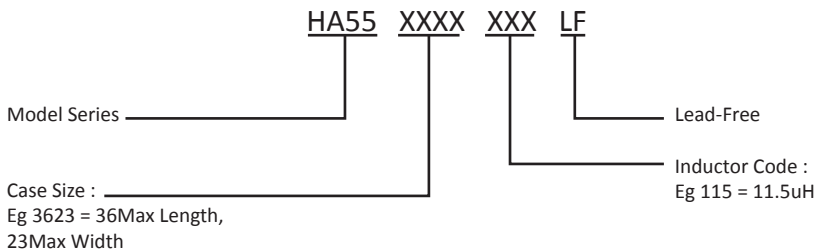

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.