

1N66xxUB Series



Silicon Switching Diode

Rev. V4

Features

- JAN, JANTX, JANTXV and JANS Qualification is available per MIL-PRF-19500/578/609 (see part nomenclature for all available options)
- Surface Mount Equivalent of JEDEC registered 1N6638 - 1N6643
- Very Low Capacitance
- Very Fast Switching Speeds with Minimal Reverse Recovery Times
- Unidirectional as well as Doubler, Common Anode and Common Cathode Polarities are Available
- RoHS Compliant by Design

Description

The 1N66xxUB Series of switching/signal diodes feature ceramic bodied construction for military grade products per MIL-PRF-19500/578/609. These small, low capacitance diodes, with very fast switching speeds, are featured in a surface mount UB package with various polarities available.





These devices are ideally suited for high frequency data lines, RS-232 & RS-422 interface networks, and Ethernet 10 Base T, LAN & computers.



Top View



Bottom View



Electrical Specifications

Part # (add UB, UBCA, UBCC, UBD as per part nomenclature)	$V_{BR} @ I_R$		V_{RWM}	V_{FR} / t_{FR}		C_{T1}	C_{T2}	t_{rr}
				@ $I_F = 200 \text{ mA}$		$V_R = 0.0 \text{ V}$	$V_R = 1.5 \text{ V}$	$I_R = 10 \text{ mA}, I_F = 10 \text{ mA}$
	V(pk)	μA	V(pk)	V(pk)	ns	pF	pF	ns
1N6638	150	100	125	5	20	2.5	2.0	4.5
1N6639	100	10	75	5	10	2.5	—	4
1N6640	75	10	50	5	10	2.5	—	4
1N6641	75	10	50	5	10	3.0	—	5
1N6642	100	100	75	5	20	5.0	2.8	5
1N6643	75	100	50	5	20	5.0	2.8	6

1N66xxUB Series



Silicon Switching Diode

Rev. V4

Electrical Specifications

Part # (add UB, UBCA, UBCC, UBD as per part nomen- clature)	I_R				$V_F @ I_F$				I_F
	$V_R = 20 \text{ V}$	$V_R = V_{RWM}$	$V_R = 20 \text{ V}$ $T_A = +150^\circ \text{C}$	$V_R = V_{RWM}$ $T_A = +150^\circ \text{C}$			$T_A = +150^\circ \text{C}$	$T_A = -55^\circ \text{C}$	
	nA	nA	μA	μA	V	V	V	V	mA
					Min.	Max.	Max.	Max.	(pulsed)
1N6638	35	500	50	100	—	1.1 0.8	- 0.65	1.2 —	200 10
1N6639	—	100	—	90	—	1.2		1.3	500
1N6640	—	100	—	90	0.54 0.76 0.82 0.87	0.62 0.86 0.92 1.0	—	— — — 1.1	1 50 100 200
1N6641	—	100	—	90	0.87	1.1	—	1.2	200
1N6642	25	500	50	100	—	0.8 1.2	0.8 —	— 1.2	10 100
1N6643	50	500	75	100	—	0.8 1.2	0.8 —	— 1.4	10 100

Absolute Maximum Ratings @ +25°C (unless otherwise specified)

Part # (add UB, UBCA, UBCC, UBD as per part nomenclature)	Breakdown Voltage	Working Peak Reverse Voltage	Average Rectified Current @ $T_A = +75^\circ \text{C}^1$	Non-Repetitive Sinusoidal Surge Current ($t_p = 8.3 \text{ ms}$)	Junction & Storage Temperature Range
1N6638	150	125	300 mA	2.5 A (pk)	-65°C to +200°C
1N6639	100	75			
1N6640	75	50			
1N6641	75	50			
1N6642	100	75			
1N6643	75	50			

1. See derating curve.

1N66xxUB Series



Silicon Switching Diode


Rev. V4

Thermal Characteristics²

Characteristics	Symbol	Max. Value
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	325°C/W
Thermal Resistance, Junction to Solder Pad	$R_{\theta JSP}$	100°C/W


2. See thermal impedance curve.

Temperature - Current Derating

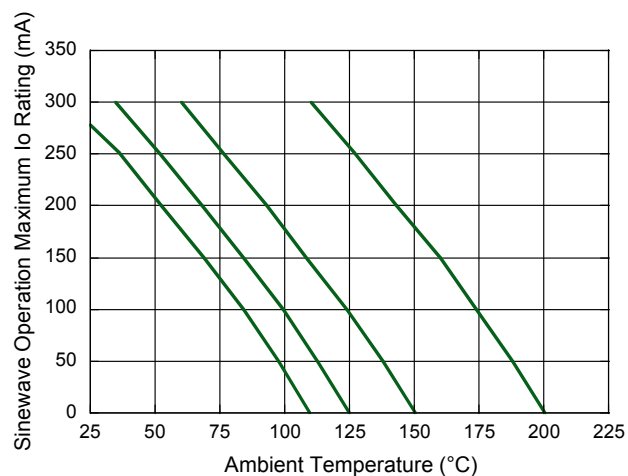

Sinewave Operation 50% Duty Cycle, $R_{\theta JA}$ (PCB) = 325°C/W.
Maximum Finish-Alloy Temperature = 175°C

Thermal Impedance

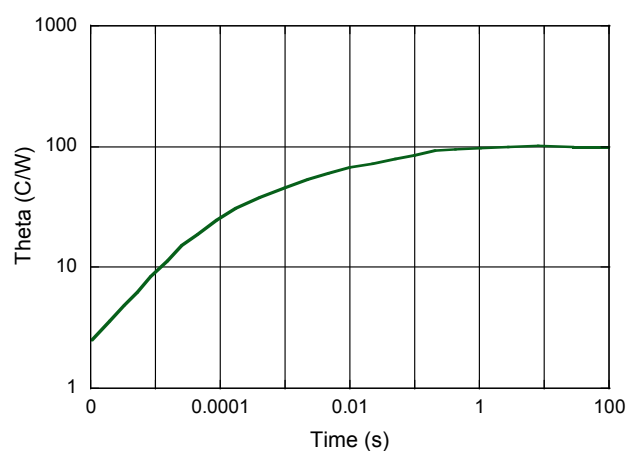






1N66xxUB Series




Silicon Switching Diode

Rev. V4

Parts Nomenclature

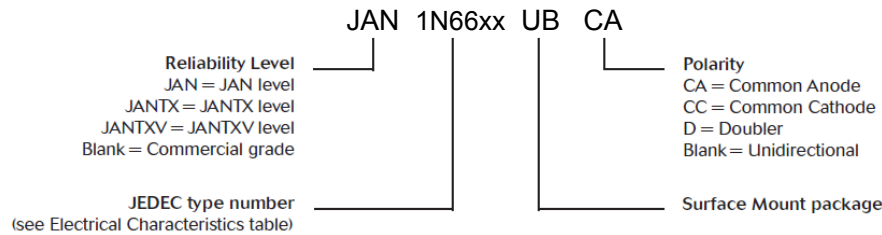

Outline Drawing (UB)

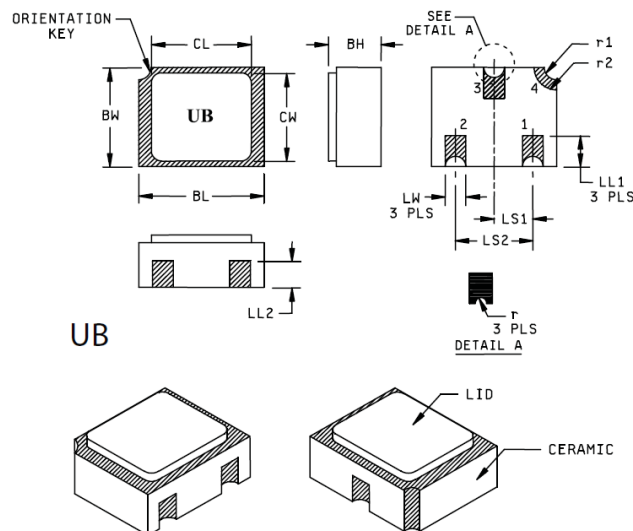

Case: Ceramic
 Thermals: Gold plating over nickel under plate.
 Tape & Reel option: Standard per EIA-4180. Consult factory for quantities.
 Weight: <0.04 grams

Dimensions^{3,4,5,6}

Symbol	Inches		Millimeters	
	Min.	Max.	Min.	Max.
BH	0.046	0.056	1.17	1.42
BL	0.115	0.128	2.92	3.25
BW	0.085	0.108	2.16	2.74
CL	-	0.128	-	3.25
CW	-	0.108	-	2.74
LL1	0.022	0.038	0.56	0.96
LL2	0.017	0.035	0.43	0.89
LS ₁	0.035	0.039	0.89	0.99
LS ₂	0.071	0.079	1.81	2.01
LW	0.016	0.024	0.41	0.61
r	-	0.008	-	0.203
r ₁	-	0.012	-	0.305
r ₂	-	0.022	-	0.559

- Dimensions are in inches. Millimeters are given for general information only.
- Hatched areas on package denote metallized areas.
- Pad 1 = Base, Pad 2 = Emitter, Pad 3 = Collector, Pad 4 = Shielding connected to the lid.
- In accordance with ASME Y14.5M, diameters are equivalent to ϕ x symbology.

VPT COMPONENTS. ALL RIGHTS RESERVED.

Information in this document is provided in connection with VPT Components products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components customers using or selling VPT Components products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.