


FiT Family Products

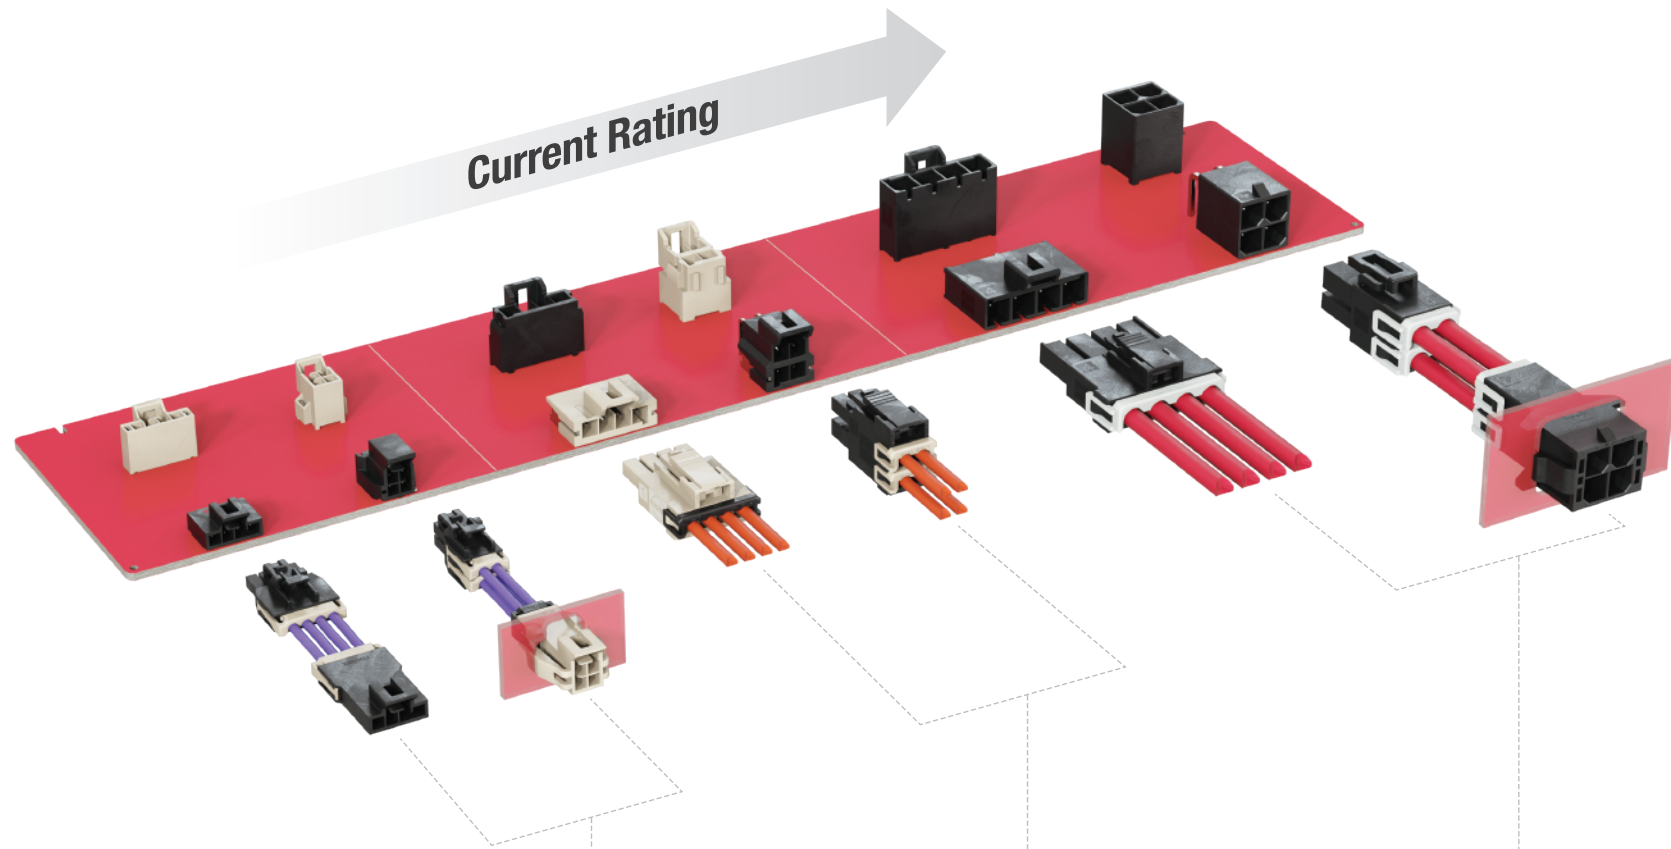

Nano-FiT

Pitch: 2.50mm

Current Rating: 8.0A

PCB Termination: Through Hole, SMT

Available Configurations:

Wire-to-Board, Wire-to-Wire

Circuit Size:

Single Row: 2-8

Dual Row: 4-16

Wire Gauge (AWG): 20-26

Ultra-FiT

Pitch: 3.50mm

Current Rating: 14.0A

PCB Termination: Through Hole

Available Configurations:

Wire-to-Board

Circuit Size:

Single Row: 2-8

Dual Row: 4-16

Wire Gauge (AWG): 16-24

Mega-FiT

Pitch: 5.70mm

Current Rating: 26.0A

PCB Termination: Through Hole

Available Configurations:

Wire-to-Board, Wire-to-Wire


Circuit Size:

Single Row: 2-8

Dual Row: 4-16

Wire Gauge (AWG): 12-16

FiT Family Products

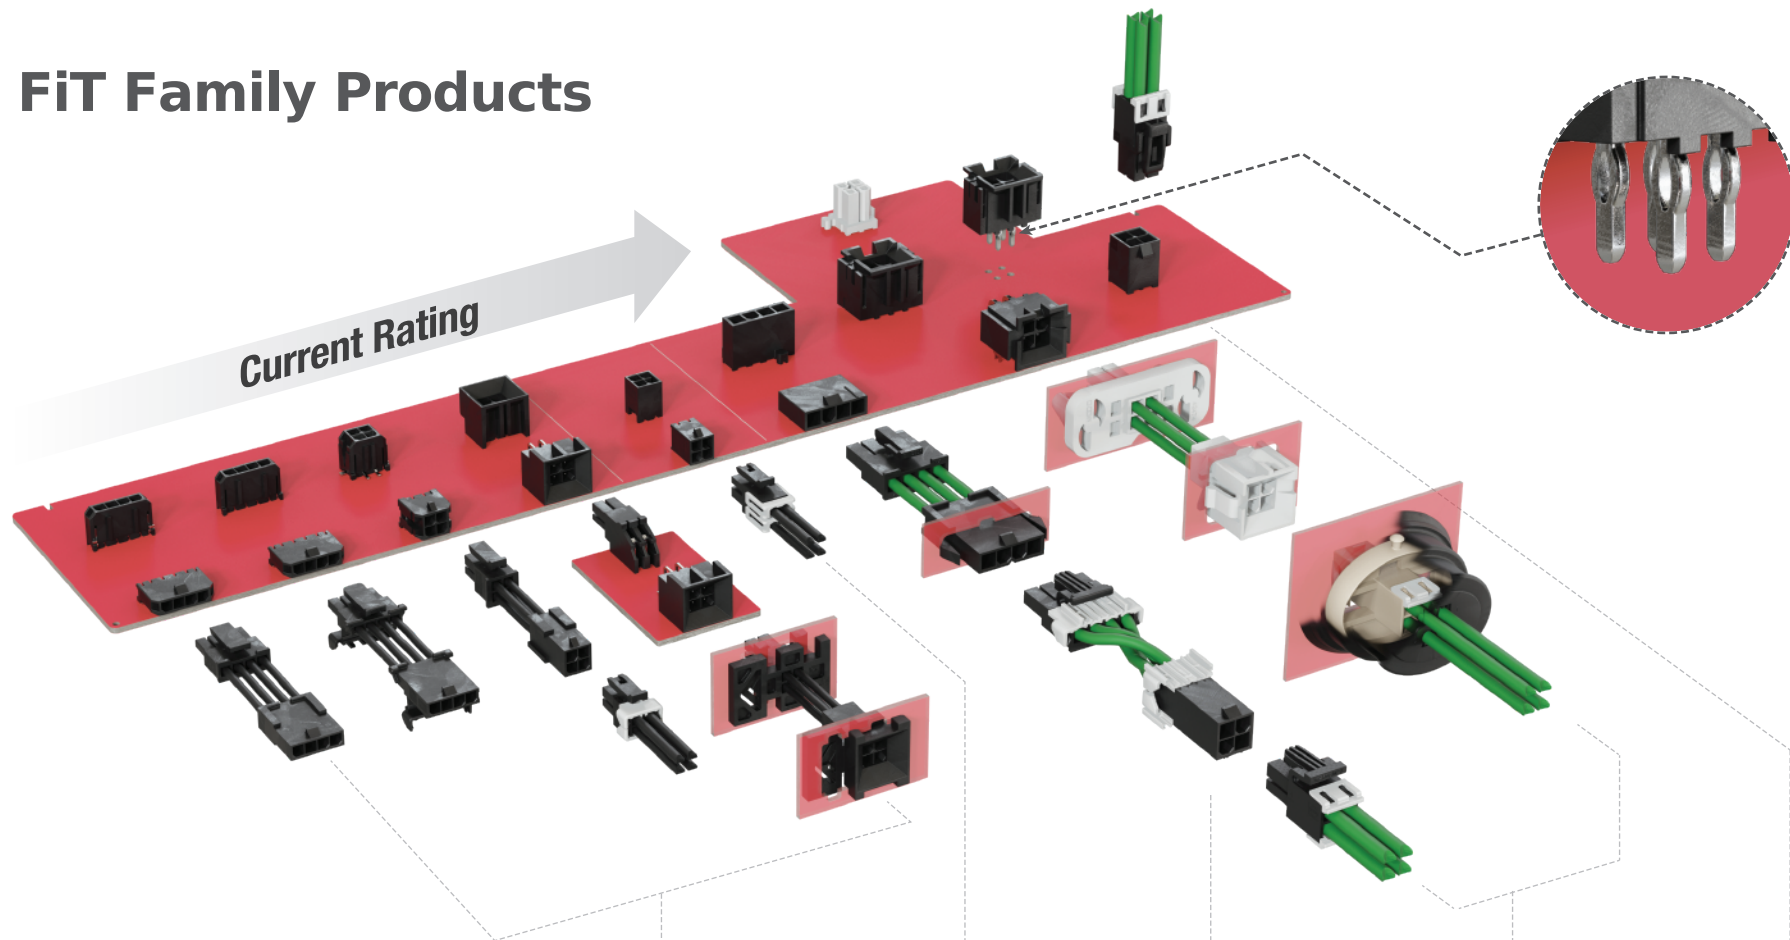

Micro-FiT

Pitch: 3.0mm
 Current Rating: 10.5A
 PCB Termination: Through Hole, SMT, Compliant Pin Through Hole
 Available Configurations: Board-to-Board, Wire-to-Board, Wire-to-Wire
 Circuit Size: Single Row: 2-12 CKT, Dual Row: 2-24 CKT
 Wire Gauge (AWG): 18-30

Micro-FiT+

Pitch: 3.0mm
 Current Rating: 12.5A
 PCB Termination: Through Hole
 Available Configurations: Wire-to-Board
 Circuit Size: Dual Row: 2-20 CKT
 Wire Gauge (AWG): 16-30

Mini-FiT

Pitch: 4.20mm
 Current Rating: 13.0A
 PCB Termination: Through Hole, SMT
 Available Configurations: Board-to-Board, Wire-to-Board, Wire-to-Wire
 Circuit Size: Single Row: 2-8 CKT, Dual Row: 2-36 CKT
 Wire Gauge (AWG): 16-28

Mini-FiT Sigma

Pitch: 4.20mm
 Current Rating: 13.5A
 PCB Termination: Through Hole
 Available Configurations: Wire-to-Board, Wire-to-Wire
 Circuit Size: Single Row: 2-8 CKT, Dual Row: 4-16 CKT
 Wire Gauge (AWG): 12-16

Mini-FiT Max

Pitch: 4.20mm
 Current Rating: 20.5A
 PCB Termination: Through Hole
 Available Configurations: Wire-to-Board
 Circuit Size: Dual Row: 4-12 CKT
 Wire Gauge (AWG): 14-18