



Carling Technologies®
Innovative Designs. Powerful Solutions.

MINIATURE SWITCHES



CATALOG

FOUNDED IN 1920



Since its founding, Carling Technologies has continually forged a tradition of leadership in quality and product innovation.

There are few products that Carling Technologies hasn't turned "ON" and fewer industries that haven't turned to Carling for solutions. With ISO and TS registered manufacturing facilities and technical sales offices worldwide, Carling ranks among the world's largest manufacturers of circuit breakers, switches, power distribution units, digital switching systems and electronic controls.



SWITCHES & CONTROLS

- Rocker
- Toggle
- Pushbutton
- Rotary

CIRCUIT PROTECTION

- Hydraulic-Magnetic
- Thermal
- GFCI / ELCI

CUSTOM SOLUTIONS

- PDU's
- Keypads
- Control Modules

MULTIPLEXED POWER SYSTEMS

- HMI Devices & I/O Modules
- Programmable Displays
- Data Communication Interfaces
- Electrical Systems Monitoring

STRATEGIC MARKETS SERVED:



On/Off Highway



Marine



Telecom/Datacom



Military



Renewable Energy

GLOBAL LOCATIONS:

Carling Technologies
World Headquarters
Plainville, CT, USA
ISO 9001:2008
ISO/TS16949:2009

Maretron
Phoenix, AZ, USA

Carling Technologies
Brownsville, TX, USA
ISO 14001:2004
ISO 9001:2008
ISO/TS16949:2009

Carling Technologies
Matehuala, Mexico
ISO 14001:2004
ISO 9001:2008
ISO/TS16949:2009

Carling Technologies
Jupiter, FL, USA

Carling Technologies
European Headquarters
Exeter, UK
ISO 9001:2008
ISO/TS16949:2009

Carling Technologies
Kowloon, Hong Kong
ISO 9001:2008
ISO/TS16949:2009

Carling Technologies
Zhongshan, China
ISO 14001:2004
ISO 9001:2008
ISO/TS16949:2009

OTHER SERVED INDUSTRIES:



Medical



Industrial Control



Audio / Visual



Commercial Food



HVAC



Floor Care



Generators



Small Appliances



Security Systems



Test & Measurement

WORLDWIDE NUMBERS:



2400+
EMPLOYEES



150+
ENGINEERS

COMPETITIVE ADVANTAGES⁺



Innovative &
Eco-Friendly Products



Excellent Quality &
Customer Service



Reliable &
On-Time Delivery



Vertical
Integration



70+
DISTRIBUTORS



50+
REP FIRMS

Table of Contents

Selector Guide	2
1S-Series	3
Sub-Miniature Rocker Switches	
1M-Series	11
Miniature Rocker & Paddle Switches	
2S-Series	24
Sub-Miniature Toggle Switches	
2M-Series	32
Miniature Toggle Switches	
3S-Series	45
Sub-Miniature Pushbutton Switches	
3M-Series	53
Miniature Pushbutton Switches	
4S-Series	70
Sub-Miniature Slide Switches	
4M-Series	72
Miniature Slide Switches	
Hardware & Accessories	76
Non Miniature Switches	See Switches & Controls Catalog

Carling’s miniature and subminiature sealed & non-sealed switches come in 1-4 pole configurations with ratings from 0.4VA to 6 amps. The miniature and subminiature switch lines include rocker, paddle, toggle, push button, and slide switches with PC, PCB, snap-in, and surface mount options. Certifications include UL, CSA, and cUL.

Available Online are tools such as a part configurator, product selectors and stock checks. Please visit www.carlingtech.com for the latest information on all our products.

Application Solution Engineers are readily available to assist you in selecting the appropriate product for your application. For further assistance, please email us at team2@carlingtech.com

Custom Design Solutions can be tailor-made for most any application using our extensive engineering resources.

Other Products such as switches & controls, hydraulic-magnetic, thermal and ground fault circuit breakers are also available.

	Series	Sub-Miniature	Miniature	Sealed	Surface Mount	Approvals	IP Rating
ROCKER	1S1 	✓	-	-	-		N/A
	1SS 	✓	-	✓	-	N/A	IP67
	1SM 	✓	-	✓	✓	N/A	IP67
	1M1 	-	✓	-	-		N/A
	1MS 	-	✓	✓	-		IP67
TOGGLE	2S1 	✓	-	-	-		N/A
	2SM 	✓	-	✓	✓	N/A	IP67
	2SS 	✓	-	✓	-	N/A	IP67
	2M1 	-	✓	-	-		N/A
	2M1H 	-	✓	✓	-		IP67
	2MS 	-	✓	✓	-		IP67
PUSHBUTTON	3S1 	✓	-	-	-	N/A	N/A
	3SS 	✓	-	✓	-	N/A	IP67
	3SM 	✓	-	✓	✓	N/A	IP67
	3MN 	-	✓	-	-		N/A
	3MS 	-	✓	✓	-		IP68
	3MA 	-	✓	-	-		N/A
	3MNH 	-	✓	✓	-		IP67
SLIDE	4S1 	✓	-	-	-	N/A	N/A
	4M1 	-	✓	-	-		N/A

*Manufacturer reserves the right to change product information without prior notice

1SS/1S1/1SM

1S-Series

SUB-MINIATURE ROCKERS

The 1S family of sub-miniature rocker switches is composed of three switch series; the **1S1-Series** sub-miniature rocker switch, the **1SS-Series** sealed sub-miniature rocker switch, and the **1SM-Series** surface mount sealed sub-miniature rocker switch. All of these series offer a variety of ratings, circuits, contact materials, terminal platings, and actuator colors.



Product Highlights:

- ♦ IP67 Sealing
- ♦ 5 Circuit Configurations
- ♦ 3 Rocker Styles to choose from
- ♦ Dry-Circuit thru 3A 125VAC Rating
- ♦ Snap-in, Solder Lug or PC Terminations

Typical Applications:

- ♦ Instrumentation
- ♦ Test Equipment
- ♦ Telecommunications
- ♦ Networking
- ♦ Handheld Appliances


Resources:

[Download 3D CAD Files](#)

[IGS >](#) [STP >](#)



1SS-Series
Sealed
Sub-Miniature
Rocker Switch



1S1-Series
Sub-Miniature
Rocker Switch



1SM-Series
Sealed Surface Mount
Sub-Miniature
Rocker Switch

Electrical

Contact Rating	refer to ordering scheme
Electrical Life	1S1-Series: 30,000 make & break cycles @ full load 1SS & 1SM-Series: 50,000 make & break cycles @ full load
Contact Resistance	20 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts
Insulation Resistance	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level

Physical

Operating Temperature	-30°C to +85°C
Index of Protection	1SS & 1SM-Series: IP67
Solder Heat Resistance	MIL-STD-202, Method 210
Actuator Travel	25°

Material

Case	all UL94 V-0 1S1-Series: Dially phthalate (DAP) 1SS-Series: Glass filled nylon 6/6, flame retardant, heat stabilized 1SM-Series: Glass filled nylon 4/6, flame retardant, heat stabilized
Rocker	1S1-Series: Nylon (UL 94V-0) 1SS & 1SM-Series: Nylon, black standard, internal o-ring sealed
Bushing	1S1-Series: Brass, nickel plated 1SS-Series: Glass filled nylon 6/6, flame retardant, heat stabilized (UL 94V-0) 1SM-Series: Glass filled nylon 4/6, flame retardant, heat stabilized (UL 94V-0)
Housing	1S1-Series: Stainless Steel
Switch Support	1S1 & 1SM-Series: Brass, tin plated
Terminal Seal	Epoxy

1SS - **WMSP** **1** - **R2** / **2** **M2** **G** **E**

1 Series 2 Poles 3 Circuit 4 Actuator Style 5 Actuator Color 6 Termination 7 Contacts 8 Seal

1 SERIES

1SS Sealed Sub-Miniature Rocker Switch

2 POLES

WMSP Single pole - uses terminals 1, 2 & 3
WMDP Double pole - uses terminals 1, 2, 3, 4, 5 & 6

3 CIRCUIT

() - momentary		
Position:	1	2
	2-3, 5-6	Connected Terminals
1	ON	NONE
2	ON	NONE
3	ON	OFF
4	(ON)	OFF
5	ON	OFF

4 ACTUATOR STYLE

R1 Small Rocker
R2 Narrow Black Rocker

5 ACTUATOR COLOR

1 White
2 Black
3 Red
Other colors available, consult factory.

6 TERMINATION

M1 Solder Lug	M61 Snap-In, U bracket, 90° horizontal
M2 PCB	M71 Snap-In, U bracket, 90° horizontal
M6 PC Mount, 90° horizontal	VS21 Snap-In, U bracket
M7 PC Mount, 90° vertical	
VS2 PC Mount, U bracket	

See page 6-7 for dimensional specifications.

7 CONTACTS / TERMINALS

Contact	Material	Terminal Plating	Rating	Approvals
G	silver ¹	gold over silver	3A 125VAC or 28VDC, 1.5A 250VAC	IP67
K	gold ^{2,5}	tin ⁴	0.4VA max 20V max (AC/DC)	IP67
P	silver ^{1,6}	tin ⁴	3A 125VAC or 28VDC, 1.5A 250VAC	IP67
R	gold ²	gold ^{2,3}	0.4VA max 20V max (AC/DC)	IP67

8 EPOXY SEAL


E Epoxy Seal **0** without Epoxy Seal

Notes:


- Tin option not available with M1 terminal.
- 1 Movable contact and terminal platings: silver over copper alloy
- 2 Movable contact platings: gold over nickel over copper alloy
- 3 Terminal platings: gold over nickel over copper alloy
- 4 Terminal platings: tin over copper alloy
- 5 Terminal contact platings: gold over nickel alloy
- 6 Terminal contact platings: silver over nickel alloy

*Manufacturer reserves the right to change product specification without prior notice.


1SS-Series Dimensional Specifications: in. [mm]

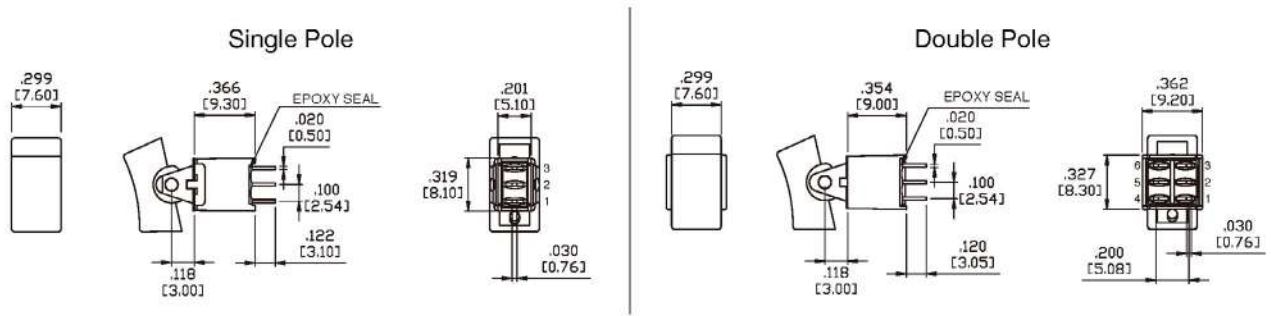


Actuator Options

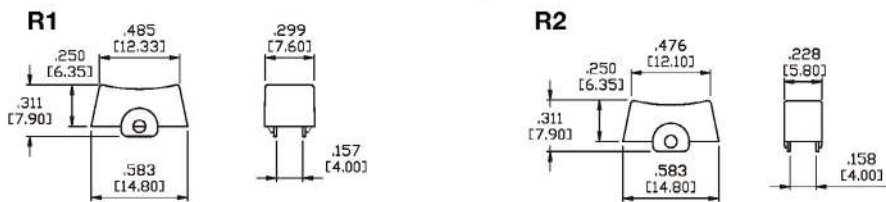


Termination Options

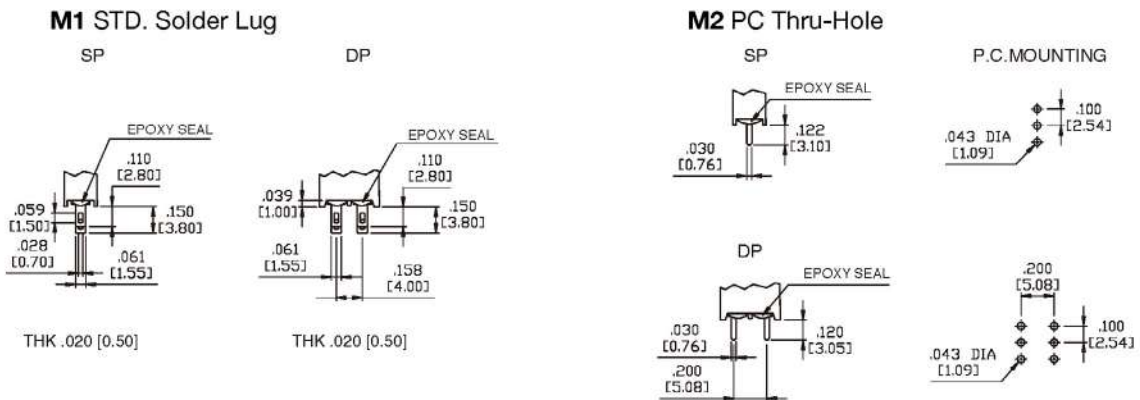

M6 Single Pole



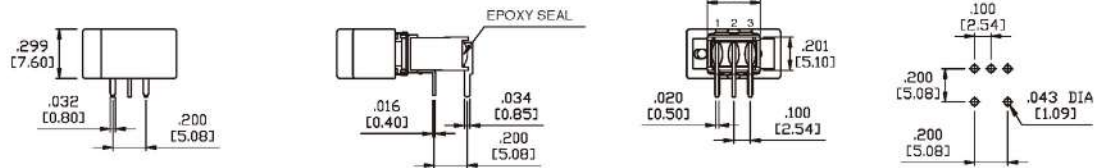


M6 Double Pole




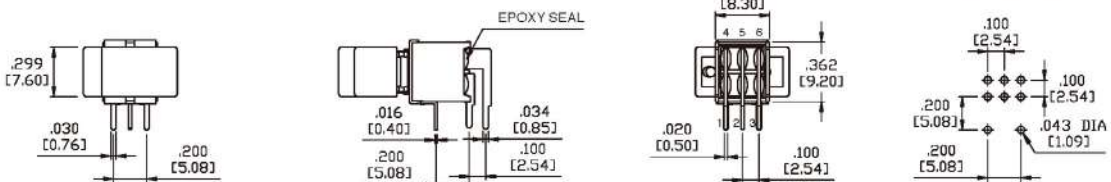


1SS-Series Dimensional Specifications: in. [mm]




Termination Options






P.C. MOUNTING




P.C. MOUNTING



P.C. MOUNTING




P.C. MOUNTING




Snap-In Termination Options


M61



M71




VS21

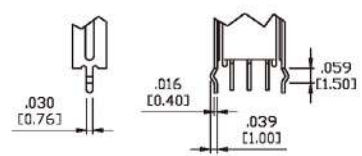


* PC Mounting for M61, M71, VS21 refer to M6, M7, VS2 respectively.

1S1-Series Dimensional Specifications: in. [mm]

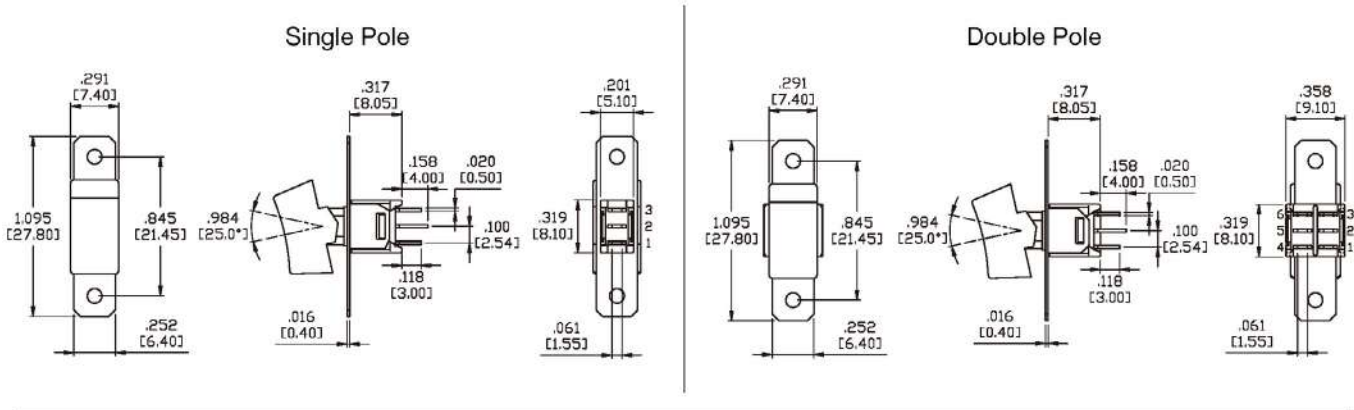


Actuator Options

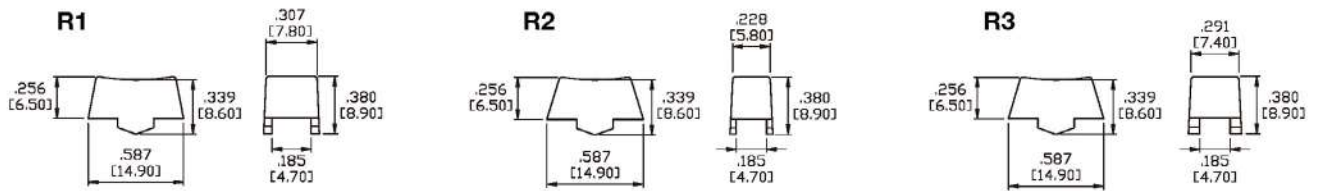


Termination Options


M1 STD. Solder Lug

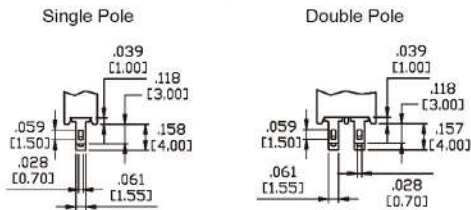


M2 PC Thru-Hole

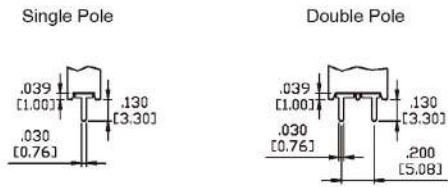


M6 Single Pole

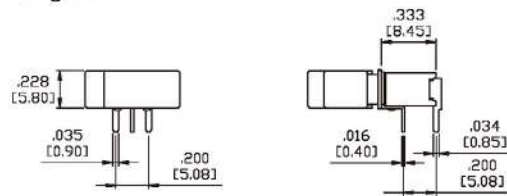


P.C.MOUNTING

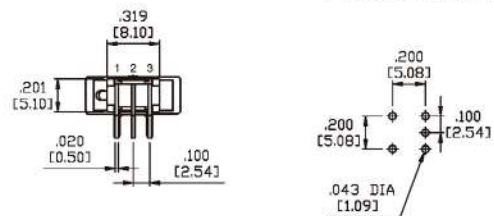

M6 Double Pole

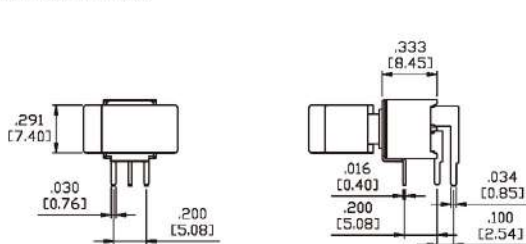




P.C.MOUNTING

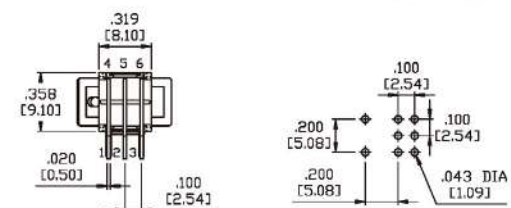


1S1-Series Dimensional Specifications: in. [mm]

Termination Options




M7 Single Pole




P.C.MOUNTING






M7 Double Pole




P.C.MOUNTING






VS2-VS3 Single Pole




P.C.MOUNTING

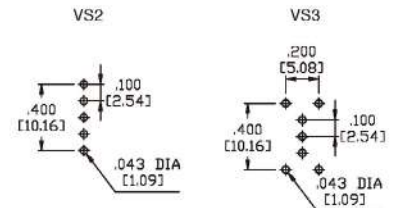

VS2-VS3 Double Pole




P.C.MOUNTING

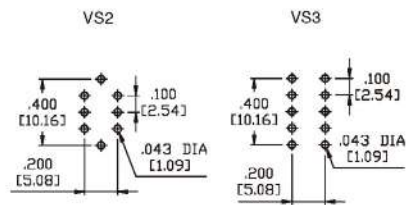


Snap-In Termination Options


M61



M71




VS21




* PC Mounting for M61, M71, VS21 refer to M6, M7, VS2 respectively.

1SM-Series Dimensional Specifications: in. [mm]

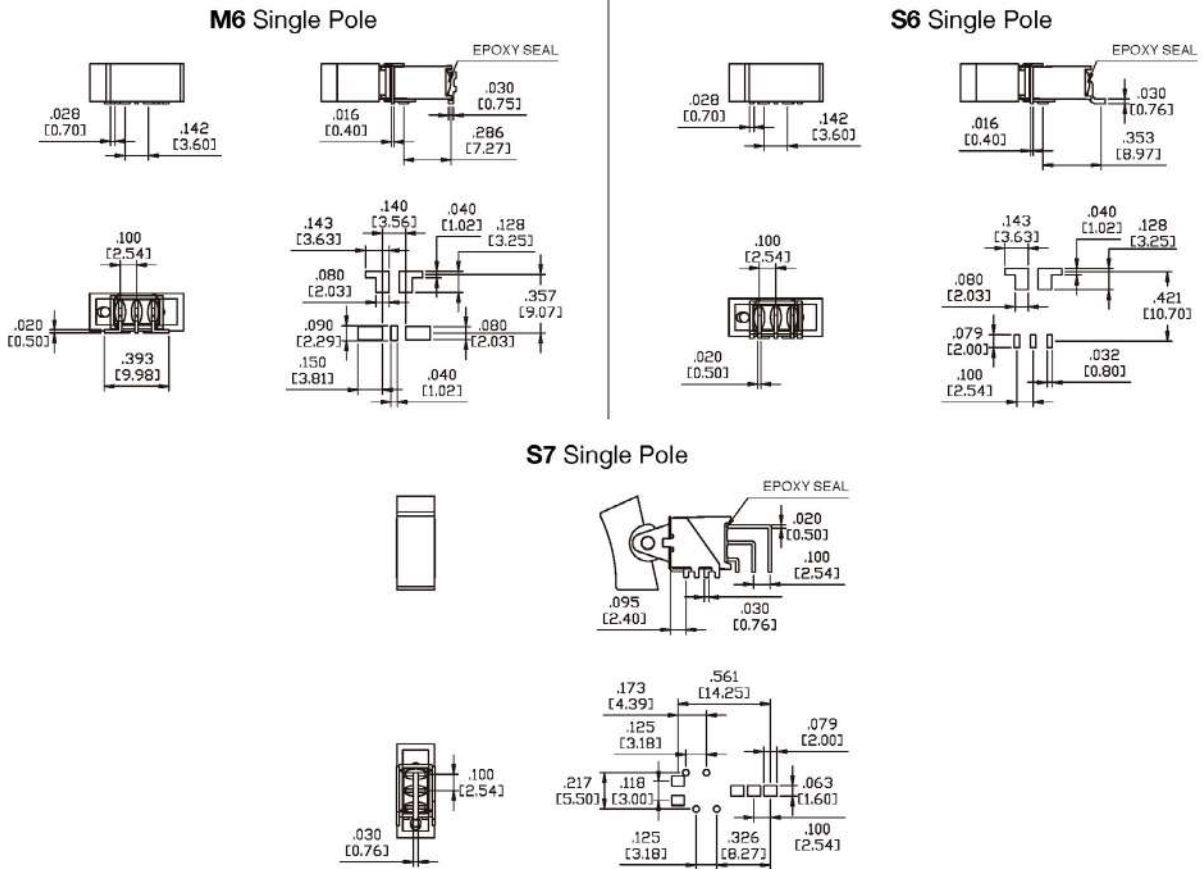

Termination Options

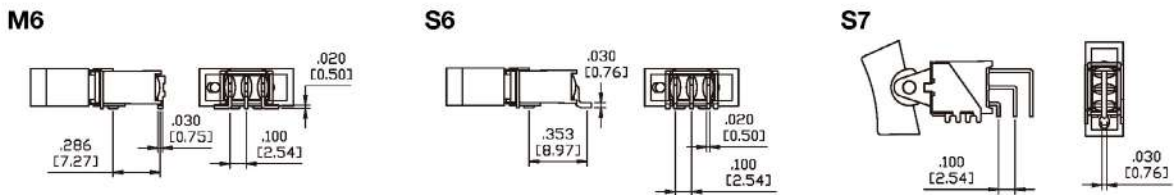

1MS/1M1

1M-Series

MINIATURE ROCKERS & PADDLES

The 1M family of miniature rocker & paddle switches is composed of two switch series; the **1M1-Series** miniature rocker and paddle switch, and the **1MS-Series** sealed miniature rocker and paddle switch. Both products feature PC mounting and offer a variety of ratings, circuits, contact materials, terminal platings, rocker and paddle actuator styles and colors.



Product Highlights:

- ♦ IP67 Sealing
- ♦ 9 Circuit Options
- ♦ Over 20 Termination Styles
- ♦ UL, CSA & cUL Approvals

Typical Applications:

- ♦ Instrumentation
- ♦ Test Equipment
- ♦ Telecommunications
- ♦ Networking
- ♦ Handheld Appliance

Resources:

[Download 3D CAD Files](#)





1MS-Series
Sealed
 Miniature Rocker
 & Rocker Switch



1M1-Series
 Miniature Rocker
 & Rocker Switch

Electrical

Contact Rating	refer to ordering scheme
Electrical Life	<i>1MS-Series:</i> 30,000 make & break cycles @ full load <i>1M1-Series:</i> 50,000 make & break cycles @ full load
Contact Resistance	10 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts
Insulation Resistance	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level

Physical

Operating Temperature	-30°C to +85°C
Index of Protection	1MS-Series: IP67
Solder Heat Resistance	MIL-STD-202, Method 210
Actuator Travel	25°

Material

Case	<i>1MS-Series:</i> Glass filled nylon 6/6, flame retardant, heat stabilized (UL 94V-0) <i>1M1-Series:</i> Dially phthalate (DAP) (UL 94V-0)
Rocker/Paddle	<i>1MS-Series:</i> Nylon, black standard, internal o-ring sealed <i>1M1-Series:</i> Nylon (UL 94V-0)
Bushing	<i>1MS-Series:</i> Glass filled nylon 6/6, flame retardant, heat stabilized (UL 94V-0) <i>1M1-Series:</i> Brass, nickel plated
Housing	<i>1MS-Series:</i> Spring Steel <i>1M1-Series:</i> Stainless Steel
Actuator Pivot & Mounting Bracket	<i>1MS-Series:</i> Nylon (UL 94V-0) <i>1M1-Series:</i> Stainless Steel
Actuator Pivot Retainer	<i>1MS-Series:</i> Stainless Steel
Switch Support	Brass, tin plated
Terminal Seal	Epoxy

*Manufacturer reserves the right to change product specification without prior notice.

1MS - SP 1 - R6 / 2 M6 G E

1 Series 2 Poles 3 Circuit 4 Actuator Style 5 Actuator Color 6 Termination 7 Contacts 8 Seal

1 SERIES
1MS Sealed Miniature Rocker Switch

2 POLES
SP Single pole - uses terminals 1, 2 & 3
DP Double pole uses terminals 1,2, 3, 4, 5 & 6
3P Three pole uses terminals 1,2, 3, 4, 5, 6, 7, 8 & 9

3 CIRCUIT
 () - momentary
Position:

1	2	3
2-3, 5-6, 8-9	Connected Terminals	2-1, 5-4, 8-7
1 ON	NONE	ON
2 ON	NONE	(ON)
3 ON	OFF	ON
4 (ON)	OFF	(ON)
5 ON	OFF	(ON)
6* ON	ON	ON
7* (ON)	ON	(ON)
8* ON	ON	(ON)
9* OFF	ON	(ON)

*Center Position Connects 2-3, 5-4, 8-9

4 ACTUATOR STYLE

R1 Standard Rocker	R4 Large Paddle
R2 Standard Paddle	R5 Large Rocker
R3 Medium Rocker	R6 Small Rocker
	R7 Medium Paddle

5 ACTUATOR COLOR
 1 White 2 Black 3 Red
 Black is standard. Other colors available, consult factory.

6 TERMINATION

M1 Solder Lug	VS2 PC Mount, U bracket
M2 PCB	VS3 PC Mount, U bracket
M3 Quick Connect	VS4 PC Mount, U bracket
M51 Wire Wrap	VS5 PC Mount, U bracket
M52 Wire Wrap	VS21 Snap-In, U bracket
M53 Wire Wrap	VS31 Snap-In, U bracket
M54 Wire Wrap	VS41 Snap-In, U bracket
M6 PC Mount, 90° horizontal	VS51 Snap-In, U bracket
M7 PC Mount, 90° vertical	U2 Vertical Mount, 3-Pole
	U4 Snap-In, U bracket, 3-Pole

See page 16-18 for dimensional specifications.

7 CONTACTS / TERMINALS

Contact	Material	Terminal Plating	Rating	Approvals
G	silver ¹	gold over silver	5A 125VAC or 28VDC, 2A 250VAC	UL, IEC, IP67
K	gold ^{2,5}	tin ⁴	0.4VA max 20V max (AC/DC)	IP67
P	silver ^{1,6}	tin ⁴	5A 125VAC or 28VDC, 2A 250VAC	UL, IEC, IP67
R	gold ²	gold ³	0.4VA max 20V max (AC/DC)	IP67

8 EPOXY SEAL
E Epoxy Seal 0 without Epoxy Seal

Notes:
 Tin option not available with M1 and M3 terminals.
 1 Movable contact and terminal platings: silver over copper alloy
 2 Movable contact platings: gold over nickel over copper alloy
 3 Terminal platings: gold over nickel over copper alloy
 4 Terminal platings: tin over copper alloy
 5 Terminal contact platings: gold over nickel alloy
 6 Terminal contact platings: silver over nickel alloy

1M1 - SP 1 - R8 / 2 - M6 Q E

1 Series 2 Poles 3 Circuit 4 Actuator Style 5 Actuator Color 6 Frame Color 7 Termination 8 Contacts 9 Seal

1 SERIES
1M1 Miniature Rocker Switch

2 POLES
SP Single pole - uses terminals 1, 2 & 3
DP Double pole uses terminals 1,2, 3, 4, 5 & 6
3P Three pole uses terminals 1,2, 3, 4, 5, 6, 7, 8 & 9
4P Four pole uses terminals 1,2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12

3 CIRCUIT
 () - momentary
Position:

1	2	3
2-3, 5-6, 8-9, 11-12	Connected Terminals	2-1, 5-4, 8-7, 11-10
1 ON	NONE	ON
2 ON	NONE	(ON)
3 ON	OFF	ON
4 (ON)	OFF	(ON)
5 ON	OFF	(ON)
6 ¹ ON	ON	ON
7 ¹ (ON)	ON	(ON)
8 ¹ ON	ON	(ON)
9 ² NONE	ON	(ON)

4 ACTUATOR STYLE

R1 Standard Rocker	R5 Large rocker
R2 Standard Paddle	R6 Rocker & frame
R3 Medium Rocker	R7 Paddle & frame
R4 Large Paddle	R8 Rocker without frame
	R9 Paddle without frame

5 ACTUATOR COLOR / 6 FRAME COLOR
 0 No Frame* 2 Black
 1 White 3 Red
 Black is standard. Other colors available, consult factory.
 *Actuator style R8 or R9 only.

7 TERMINATION

M1 Solder Lug	VS3 PC Mount, U bracket
M2 PCB	VS4 PC Mount, U bracket
M3 Quick Connect	VS5 PC Mount, U bracket
M51 Wire Wrap	M61 Snap-In, U bracket, 90° horizontal
M52 Wire Wrap	M71 Snap-In, U bracket, 90° vertical
M53 Wire Wrap	VS21 Snap-In, U bracket
M54 Wire Wrap	VS31 Snap-In, U bracket
M6 PC Mount, 90° horizontal	VS41 Snap-In, U bracket
M7 PC Mount, 90° vertical	VS51 Snap-In, U bracket
VS2 PC Mount, U bracket	U4 Snap-In, U bracket, 3-Pole

See page 21-23 for dimensional specifications.

8 CONTACTS / TERMINALS


Contact	Material	Terminal Plating	Rating	Approvals
G	silver ³	gold over silver	5A 125VAC or 28VDC, 2A 250VAC	UL, IEC
K	gold ^{4,7}	tin ⁶	0.4VA max 20V max (AC/DC)	N/A
P	silver ^{3,8}	tin ⁶	5A 125VAC or 28VDC, 2A 250VAC	UL, IEC
Q	silver ³	silver ³	5A 125VAC or 28VDC, 2A 250VAC	UL, IEC
R	gold ⁴	gold ⁵	0.4VA max 20V max (AC/DC)	N/A

9 EPOXY SEAL
E Epoxy Seal 0 without Epoxy Seal


Notes:
 Tin option not available with M1 and M3 terminals.
 1 Double-Pole and Four-Pole only. Center position connects 2-3, 5-4, 8-9, 11-10
 2 Double-Pole only
 3 Movable contact and terminal platings: silver over copper alloy
 4 Movable contact platings: gold over nickel over copper alloy
 5 Terminal platings: gold over nickel over copper alloy
 6 Terminal platings: tin over copper alloy
 7 Terminal contact platings: gold over nickel alloy
 8 Terminal contact platings: silver over nickel alloy

1MS-Series Dimensional Specifications: in. [mm]


Single Pole

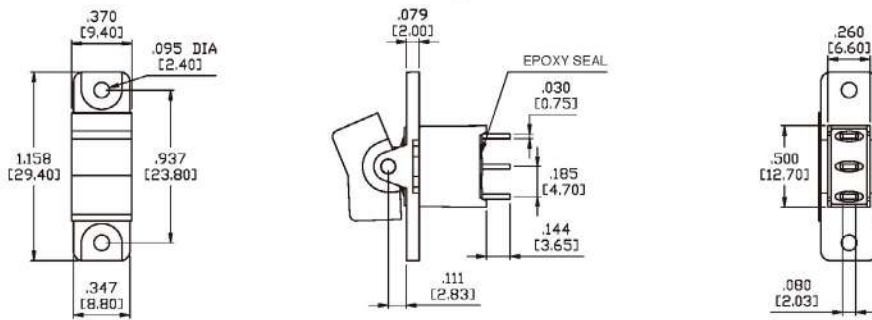


Double Pole

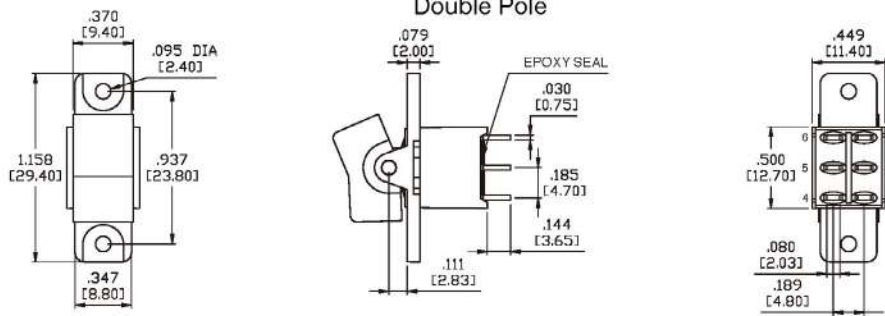

Three Pole

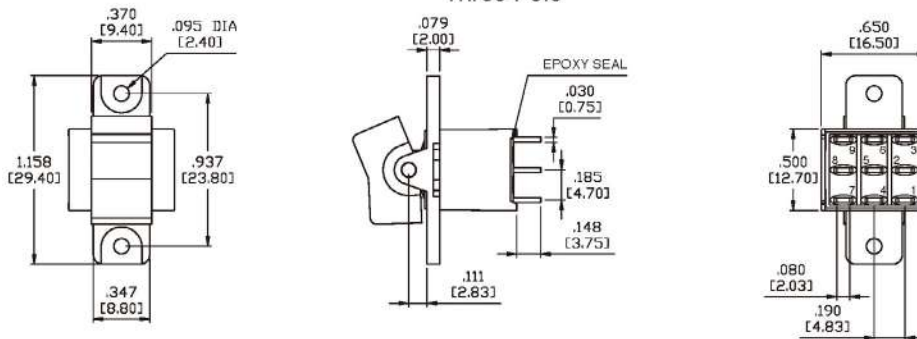


Actuator Options for Panel Rear Mount

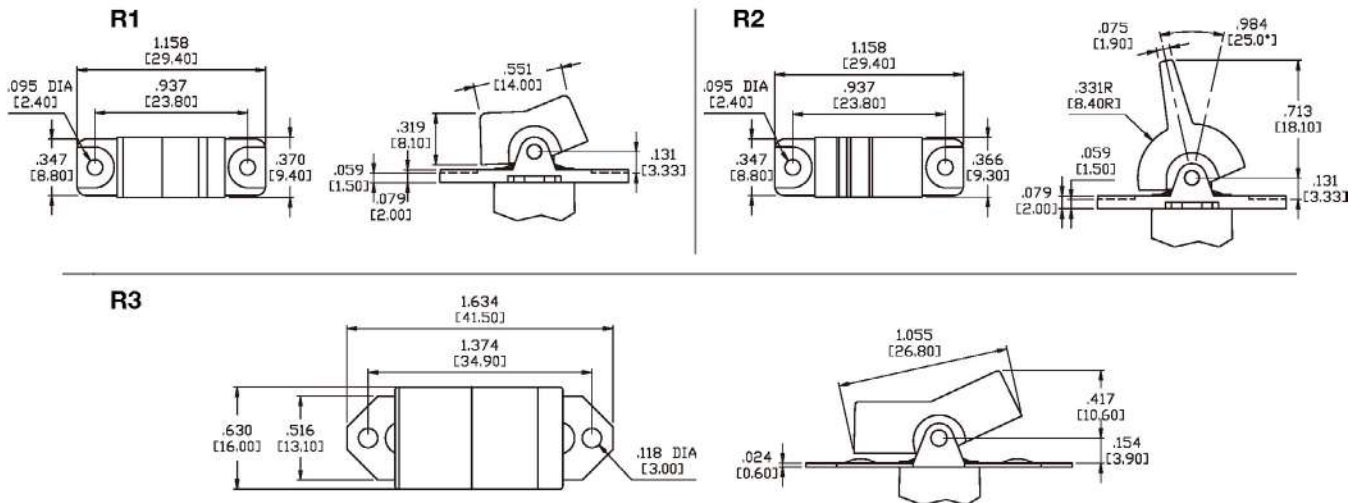


1MS-Series Dimensional Specifications: in. [mm]

Actuator Options for Panel Rear Mount


R4

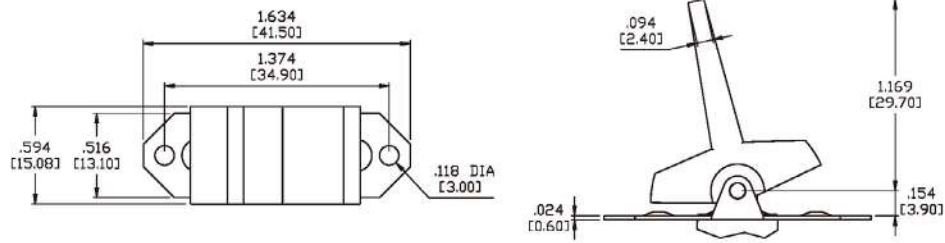


R5

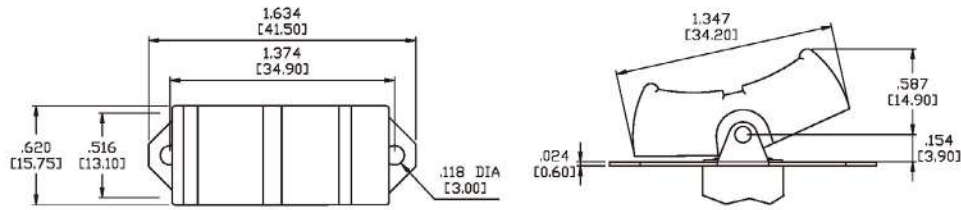

R6

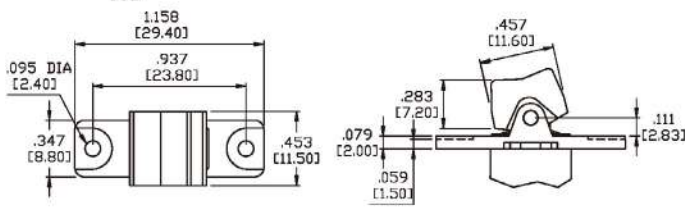


R7

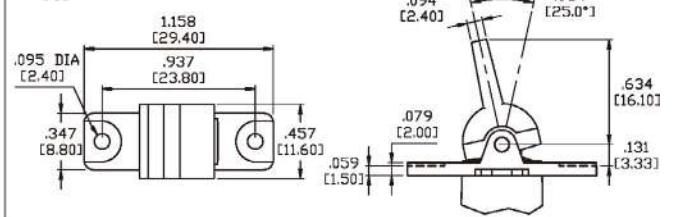


Actuator Options for PC Mount


R1

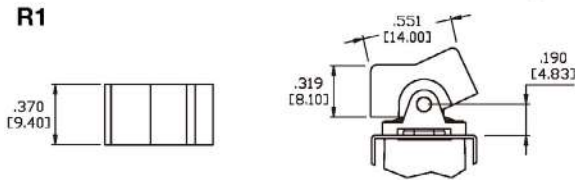


R2

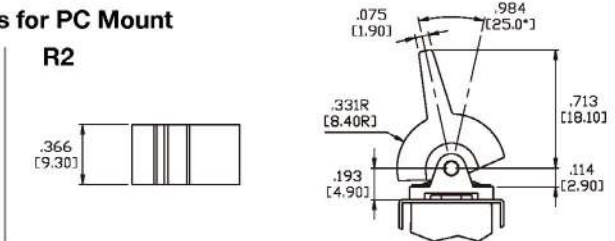


R3

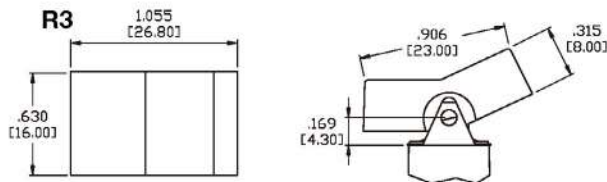


R4

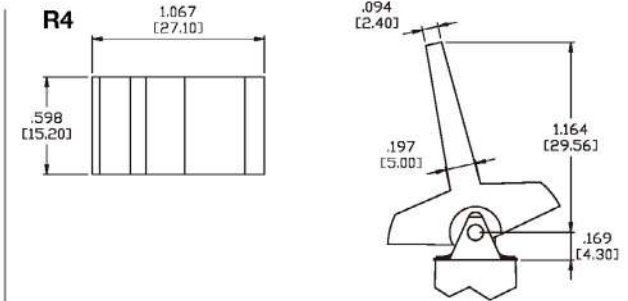

R5

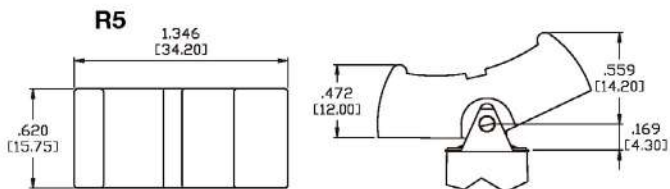


R6

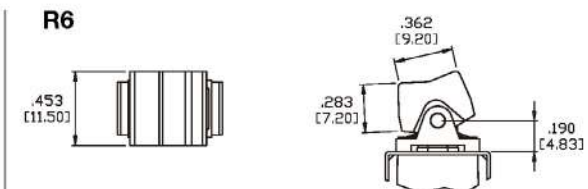

1MS-Series Dimensional Specifications: in. [mm]


Actuator Options for PC Mount

R7

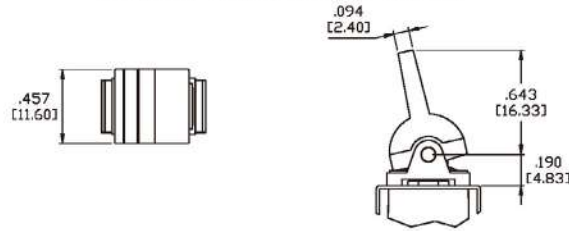


Termination Options


M1 Standard Solder Lug




M2 PC Thru-Hole



M3 Quick Connect






M5 Wire Wrap




OPTION CODE	DIM.'A'
M5-1	.711 [18.05]
M5-2	.924 [23.48]
M5-3	.386 [9.80]
M5-4	1.022 [25.97]




M6 Single Pole




P.C.MOUNTING






M6 Double Pole




P.C.MOUNTING






M6 Three Pole




P.C.MOUNTING



M7 Single Pole






P.C.MOUNTING




1MS-Series Dimensional Specifications: in. [mm]

Termination Options




M7 Double Pole




P.C.MOUNTING





M7 Three Pole



P.C.MOUNTING




VS2-VS3 Single Pole





OPTION CODE	DIM.'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C.MOUNTING




VS2-VS3 Double Pole





OPTION CODE	DIM.'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C.MOUNTING




U2-VS3 Three Pole



OPTION CODE	DIM.'A'
U2	.551 [14.00]
VS3	.630 [16.00]



P.C.MOUNTING



1MS-Series Dimensional Specifications: in. [mm]


Termination Options

VS4-VS5 Single Pole





OPTION CODE	DIM. 'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




VS4-VS5 Double Pole





OPTION CODE	DIM. 'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




U4-VS5 Three Pole







OPTION CODE	DIM. 'A'
U4	.551 [14.00]
VS5	.630 [16.00]

P.C.MOUNTING




Snap-In Termination Options


M61



VS21, VS31

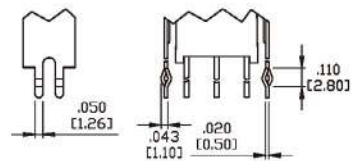


VS41, VS51

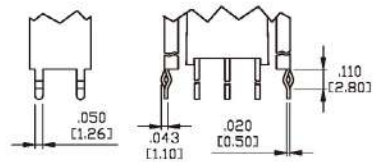


* PC Mounting for M61, M71, VS21, VS31, VS41, VS51 refer to M6, M7, VS2, VS3, VS4, VS5 respectively.

1M1-Series Dimensional Specifications: in. [mm]


Single Pole

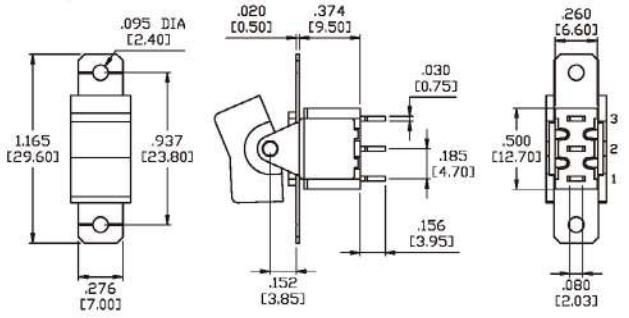


Double Pole

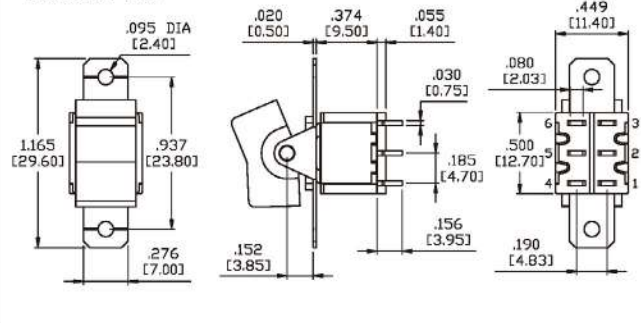

Three Pole

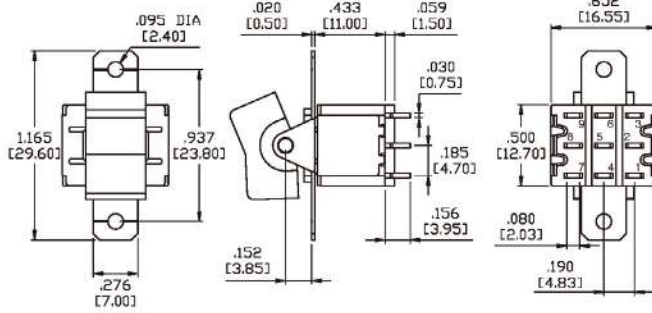


Four Pole

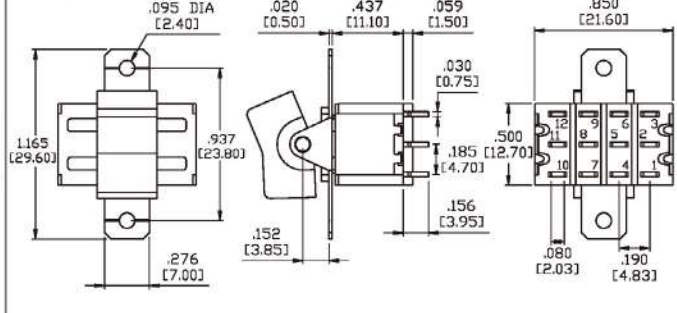


Actuator Options for Panel Rear Mount



R1

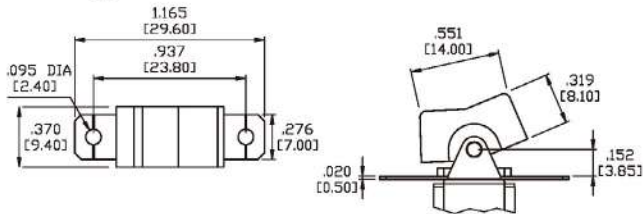



R2

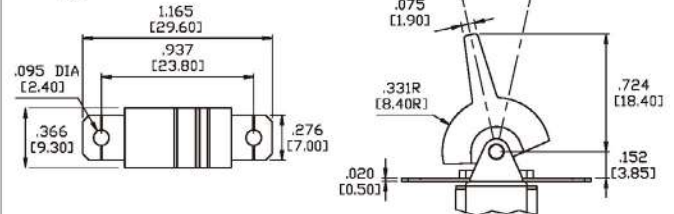

R3

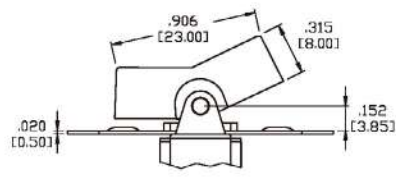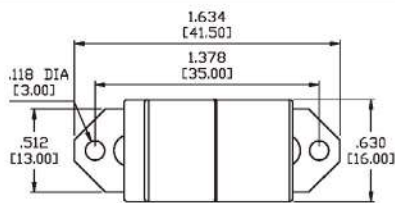


R4

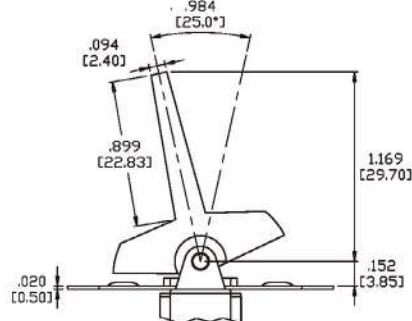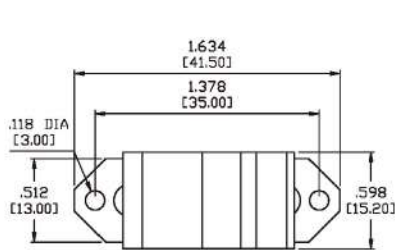

1M1-Series Dimensional Specifications: in. [mm]


Actuator Options for Panel Rear Mount

R5

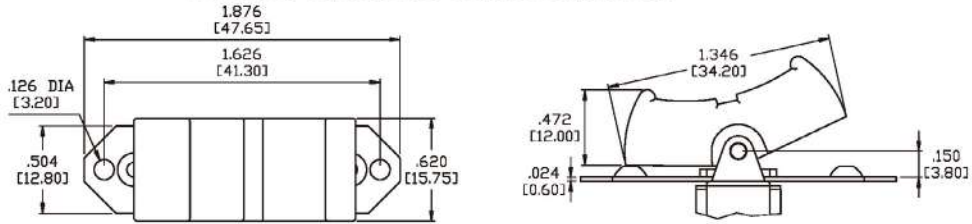


Actuator Options for Snap-In Mount

R6

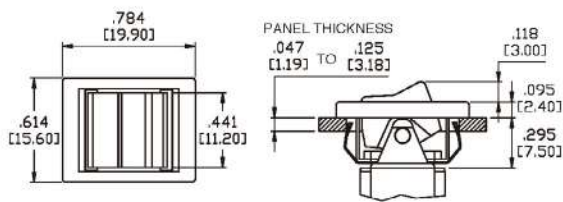


R6 WITHOUT FRAME

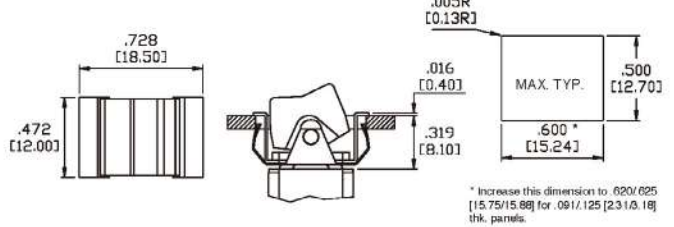


* Increase this dimension to .620/.625 [15.75/15.88] for .091/.125 [2.31/3.18] thick panels.

R7

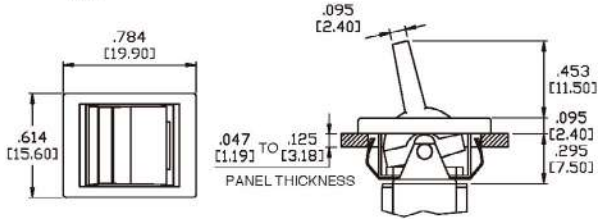


R7 WITHOUT FRAME

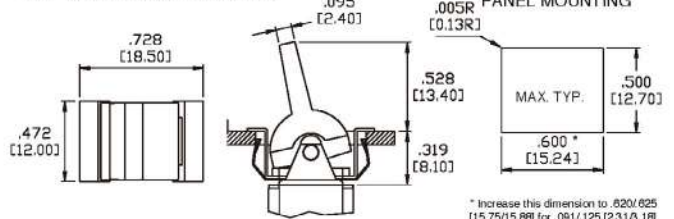


* Increase this dimension to .620/.625 [15.75/15.88] for .091/.125 [2.31/3.18] thick panels.

Actuator Options for PC Mount


R1

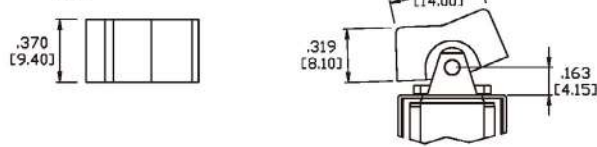


R2

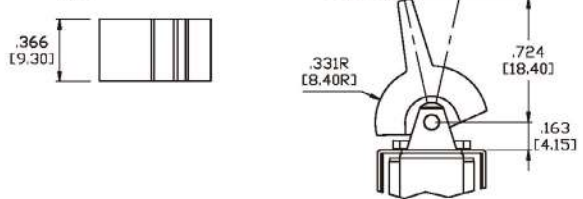

R3

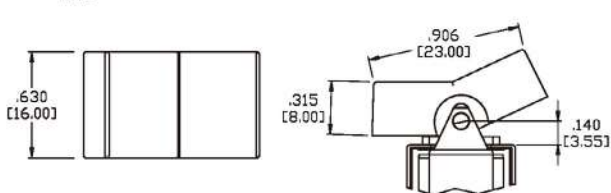


R4

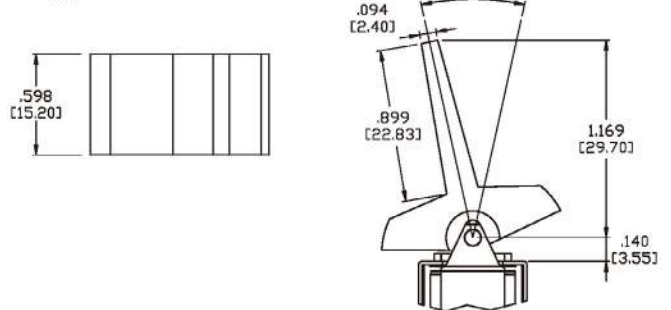


1M1-Series Dimensional Specifications: in. [mm]

Actuator Options for PC Mount

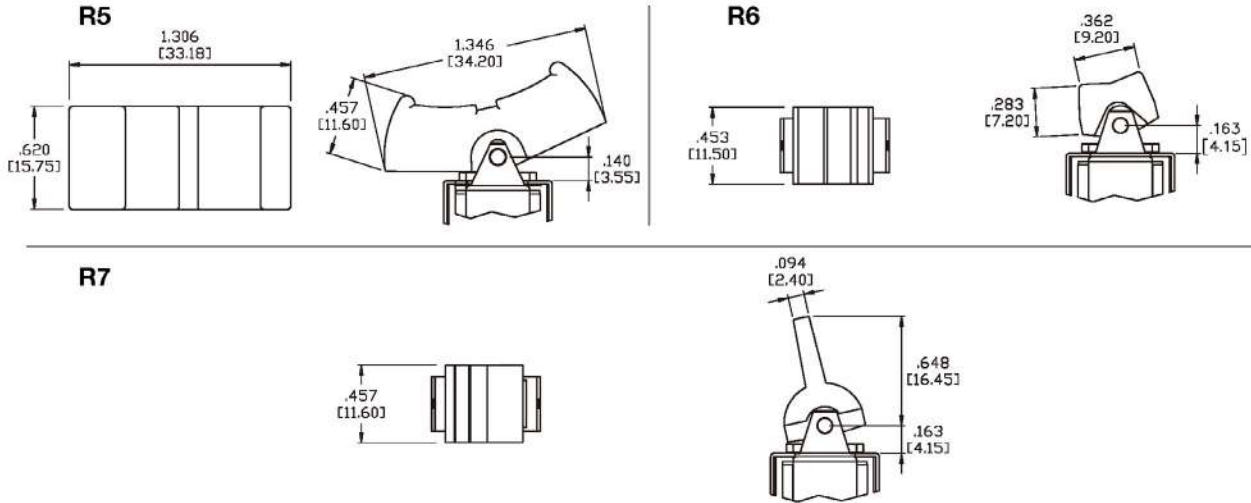


Termination Options


M1 Standard Solder Lug




M2 PC Thru-Hole



M3 Quick Connect






M5 Wire Wrap




OPTION CODE	DIM.'A'
M5-1	.750 [19.05]
M5-2	.964 [24.48]
M5-3	.425 [10.80]
M5-4	1.062 [26.97]




M6 Single Pole




P.C.MOUNTING






M6 Double Pole




P.C.MOUNTING



M7 Single Pole






P.C.MOUNTING




1M1-Series Dimensional Specifications: in. [mm]

Termination Options




M7 Double Pole




P.C.MOUNTING






M7 Three Pole




P.C.MOUNTING





M7 Four Pole



P.C.MOUNTING




VS2-VS3 Single Pole





OPTION CODE	DIM. 'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C.MOUNTING




VS2-VS3 Double Pole



OPTION CODE	DIM. 'A'
VS2	.461 [11.70]
VS3	.630 [16.00]



P.C.MOUNTING



1M1-Series Dimensional Specifications: in. [mm]


Termination Options

VS4-VS5 Single Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




VS4-VS5 Double Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




U4-VS5 Three Pole





OPTION CODE	DIM.'A'
U4	.551 [14.00]
VS5	.630 [16.00]

P.C.MOUNTING




Snap-In Termination Options



M61



VS21, VS31

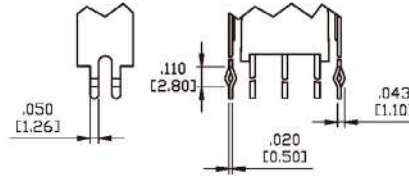

VS41, VS51





* PC Mounting for M61, VS21, VS31, VS41, VS51 refer to M6, VS2, VS3, VS4, VS5 respectively.

2SS/2S1/2SM

2S-Series

SUB-MINIATURE TOGGLES

The 2S family of sub-miniature toggle switches is composed of three switch series; the **2S1-Series** toggle switch, the **2SS-Series** sealed toggle switch, and the **2SM-Series** surface mount sealed sub-miniature toggle switch. All of these series offer a variety of ratings, circuits, contact materials, terminal platings, and actuator types.

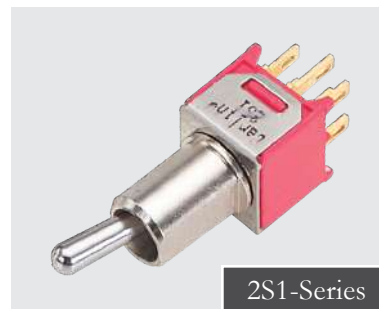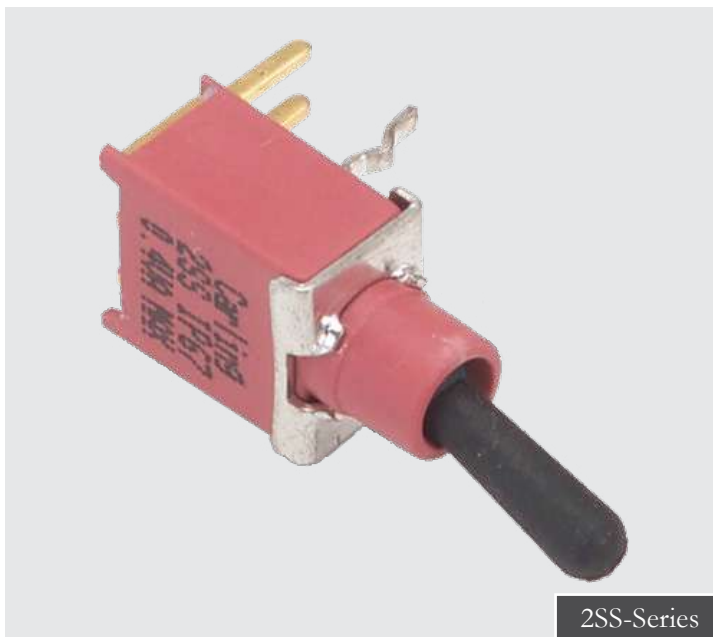

Product Highlights:

- ◆ IP67 Sealing
- ◆ 6 Actuator Options
- ◆ Surface, Thru Hole or Snap-in Mounting
- ◆ Dry-Circuit thru 3A 125VAC Ratings
- ◆ UL, CSA Approvals

Typical Applications:

- ◆ Telecommunications
- ◆ Instrumentation
- ◆ Networking
- ◆ Medical Equipment

Resources:

[Download 3D CAD Files](#)

[IGS >](#) [STP >](#)

2S1 - **MSP** **1** - **T1** - **B4** - **M6** **Q** **E**

1 Series 2 Poles 3 Circuit 4 Actuator Style 5 Bushing 6 Termination 7 Contacts 8 Seal

1 SERIES
2S1 Sub-Miniature Toggle Switch

2 POLES
MSP Single pole - uses terminals 1, 2 & 3
MDP Double pole - uses terminals 1, 2, 3, 4, 5 & 6

3 CIRCUIT
 () - momentary
Position:

Position	1	2	3
	2-3, 5-6	Connected Terminals	2-1, 5-4
1	ON	NONE	ON
2	ON	NONE	(ON)
3	ON	OFF	ON
4	(ON)	OFF	(ON)
5	ON	OFF	(ON)

4 ACTUATOR STYLE / LENGTH ⁹
T1 Round toggle .374" [9.50 mm] **T3** Round toggle .311" [7.90 mm]
T2 Round toggle .236" [6.00 mm] **T4** Round toggle .449" [11.40 mm]

5 BUSHING ¹
B1 Threaded Standard, keyway
B2 Non-Threaded Standard, keyway
B3 Threaded Short, keyway
B4 Non-Threaded Short, keyway
B5 High Torque, flat, .276"
B6 High Torque, keyway, .276"
B7 Long threaded
B8 Non threaded Long, keyway

6 TERMINATION
M1 Solder Lug **M71** Right Angle PC Thru Hole, vertical
M2 PCB **VS2** PC Mount, U bracket
M6 PC Mount, 90° horizontal **VS21** Snap-In, U bracket
M61 Snap-In, Right Angle
M7 PC Mount, 90° vertical
 See page 29-30 for dimensional specifications.

7 CONTACTS / TERMINALS

	Contact Material	Terminal Plating	Rating	Approvals
G	silver ²	gold over silver	3A 125VAC or 28VDC, 1.5A 250VAC	UL, CE
K ⁸	gold ^{3,6}	tin ⁵	0.4VA max 20V max (AC/DC)	N/A
P ⁸	silver ^{2,7}	tin ⁵	3A 125VAC or 28VDC, 1.5A 250VAC	UL, CE
Q	silver ²	silver ²	3A 125VAC or 28VDC, 1.5A 250VAC	UL, CE
R	gold ³	gold ⁴	0.4VA max 20V max (AC/DC)	N/A

8 EPOXY SEAL
E Epoxy Seal **0** without Epoxy Seal

Notes: Tin option available with PC type terminations only.
 1 All Switches come with standard nut, washer and locking ring shipped bulk. B5 & B7 bushing styles use small locking ring. See page 76-77
 2 Movable contact and terminal platings: silver over copper alloy
 3 Movable contact and terminal platings: gold over nickel over copper alloy
 4 Terminal platings: gold over nickel over copper alloy
 5 Terminal platings: tin over copper alloy
 6 Terminal contact platings: gold over nickel alloy
 7 Terminal contact platings: silver over nickel alloy
 8 Not available with M1 terminal
 9 Lengths shown are with B1 - B4 bushings. For B5 & B6 subtract .108", for B7 & B8 subtract .043"

2SM - **MSP** **1** - **T1** - **M6** **G** **E**

1 Series 2 Poles 3 Circuit 4 Actuator Style 5 Termination 6 Contacts 7 Seal 8 Packaging

1 SERIES
2SM Sealed Surface Mount Sub-Miniature Toggle Switch

2 POLES
MSP Single pole - uses terminals 1, 2 & 3

3 CIRCUIT
 () - momentary
Position:

Position	1	2	3
	2-3	Connected Terminals	2-1
1	ON	NONE	ON
2	ON	NONE	(ON)
3	ON	OFF	ON
4	(ON)	OFF	(ON)
5	ON	OFF	(ON)

4 ACTUATOR STYLE / LENGTH ¹
T1 Round toggle .425" [10.80 mm]
T2 Round toggle .240" [6.10 mm]
P1 ESD resistant plastic toggle .425" [10.80 mm]
P2 ESD resistant plastic toggle .268" [6.80 mm]
P3 ESD resistant plastic toggle .244" [6.20 mm]
P4 ESD resistant plastic toggle .291" [7.40 mm]

5 TERMINATION
K6 Surface Mount, .433" [11.00 mm]
L6 Surface Mount, .354" [9.00 mm]
M6 Surface Mount, 90° flat, .286" [7.26 mm]
M7 Surface Mount, 90° vertical
S6 Surface Mount, 90°, .353" [8.96 mm]
 See page 31 for dimensional specifications.

6 CONTACTS / TERMINALS


	Contact Material	Terminal Plating	Rating	Approvals
G	silver ²	gold over silver	3A 125VAC or 28VDC, 1.5A 250VAC	IP67
K	gold ³	tin ⁴	0.4VA max 20V max (AC/DC)	IP67
P	silver ²	tin ⁴	3A 125VAC or 28VDC, 1.5A 250VAC	IP67
Q	silver ²	silver ²	3A 125VAC or 28VDC, 1.5A 250VAC	IP67
R	gold ³	gold ³	0.4VA max 20V max (AC/DC)	IP67

7 EPOXY SEAL
E Epoxy Seal **0** without Epoxy Seal


8 PACKAGING
T/R tape reel - 500 pieces per reel
 Switches are bulk packed, unless T/R is specified at the end of the part number.

Notes:
 Tin option available with PC type terminations only.
 1 Bushing is unthreaded. .177" [4.50 mm] height
 2 Movable contact & terminal platings: silver over copper alloy
 3 Movable contact & terminal platings: gold over nickel over copper alloy
 4 Terminal platings: tin over nickel over copper alloy

2SS-Series Dimensional Specifications: in. [mm]

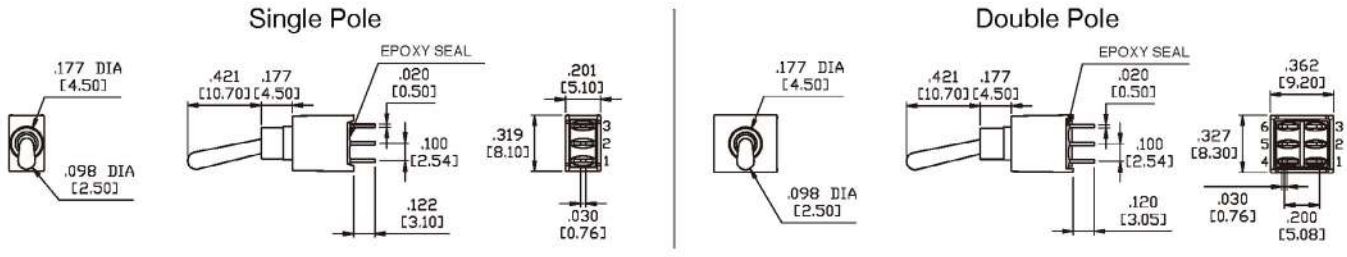


Actuator Options

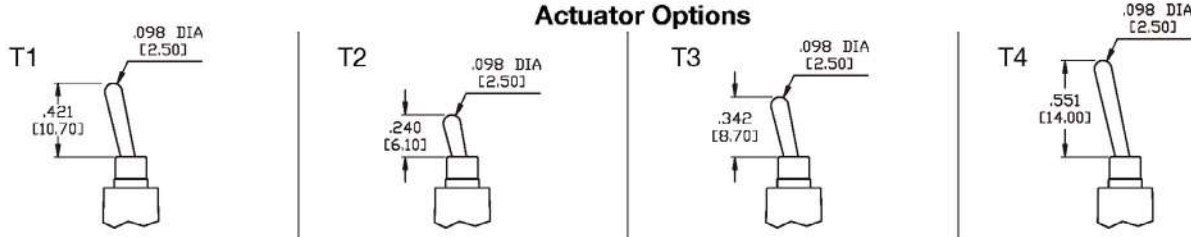


* B4 bushing shown. Subtract 2.55mm from toggle length for B1 bushing.


P1 Plastic Toggle




P2 Plastic Toggle



P3 Plastic Toggle



P4 Plastic Toggle




Bushing Options




* Subtract 2.55mm from toggle length for B1 bushing.

Termination Options


M1 STD. Solder Lug




DP






M2 PC Thru-Hole




P.C. MOUNTING



M6 Single Pole

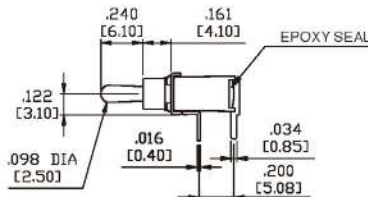




P.C. MOUNTING




2SS-Series Dimensional Specifications: in. [mm]

Termination Options




M6 Double Pole

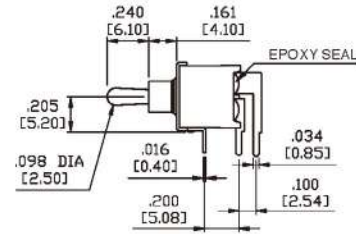


P.C.MOUNTING






M7 Single Pole




P.C.MOUNTING





M7 Double Pole

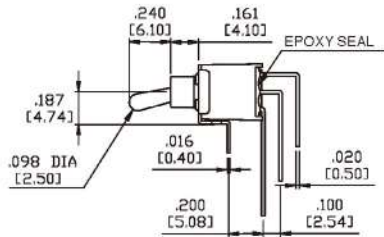


P.C.MOUNTING





VS2 Single Pole




P.C.MOUNTING



VS2 Double Pole





P.C.MOUNTING




Snap-In Termination Options


M61



M71




VS21

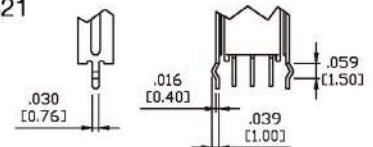


* PC Mounting for M61,M71,VS21 refer to M6,M7,VS2 respectively.


2S1-Series Dimensional Specifications: in. [mm]

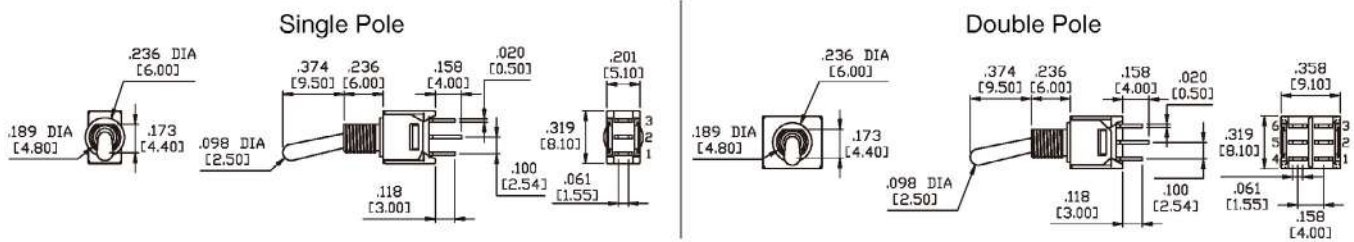


Actuator Options

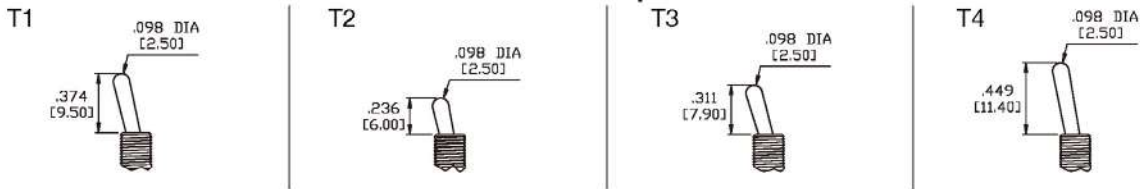


Bushing Options

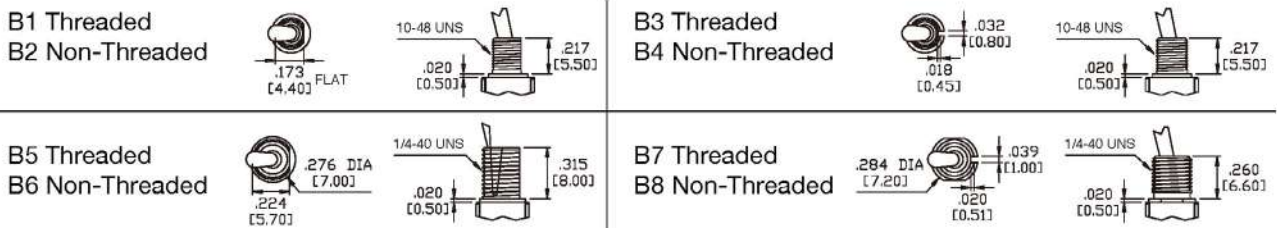


Panel Mounting

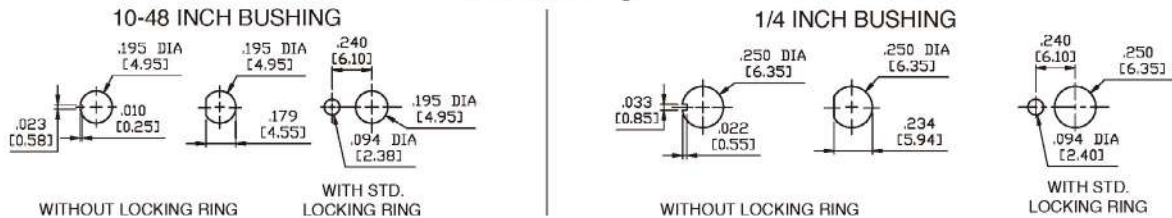


Termination Options

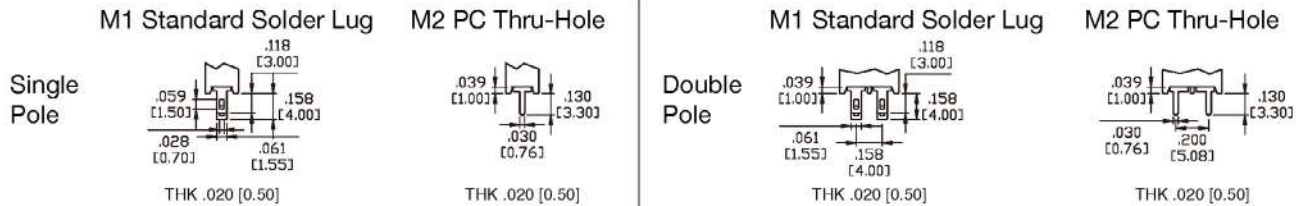

M6 Single Pole

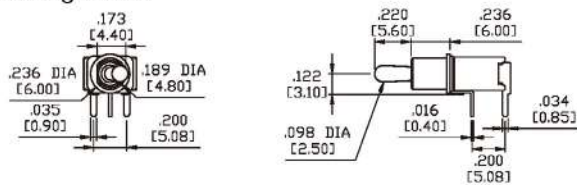




P.C. MOUNTING

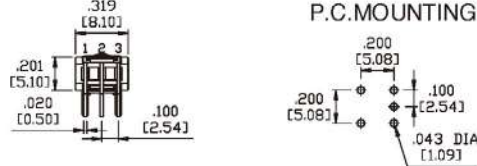


2S1-Series Dimensional Specifications: in. [mm]

Termination Options




M6 Double Pole




P.C.MOUNTING






M7 Single Pole




P.C.MOUNTING






M7 Double Pole




P.C.MOUNTING






VS2-VS3 Single Pole




P.C.MOUNTING



VS2-VS3 Double Pole




P.C.MOUNTING

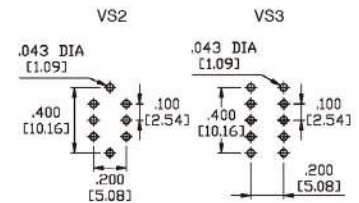


Snap-In Termination Options


M61



M71








VS21



* PC Mounting for M61, M71, VS21 refer to M6, M7, VS2 respectively.





2SM-Series Dimensional Specifications: in. [mm]

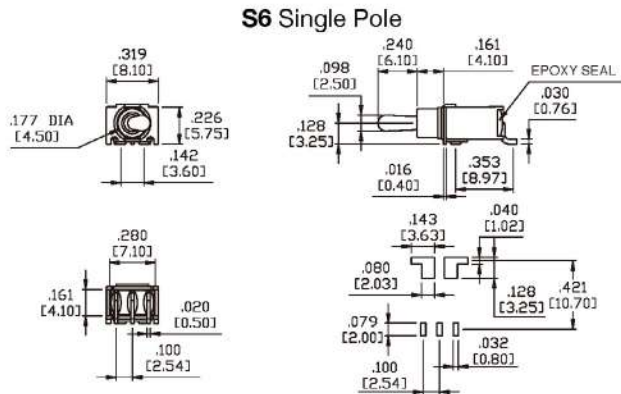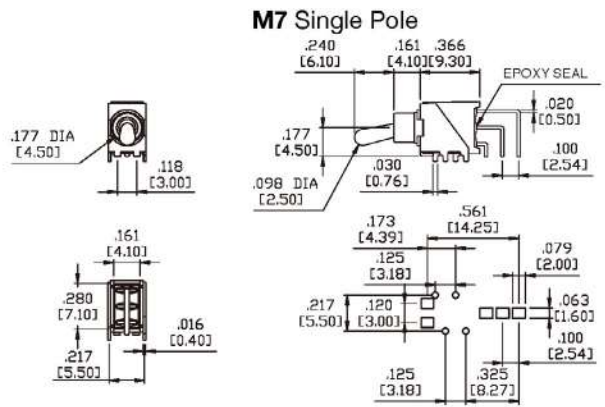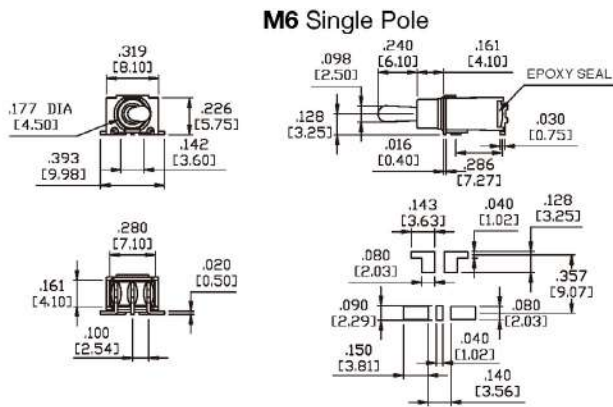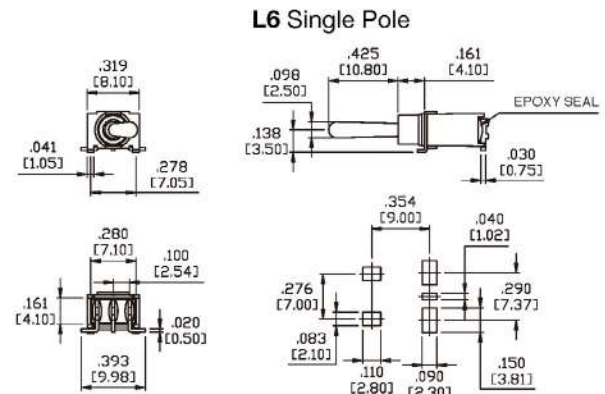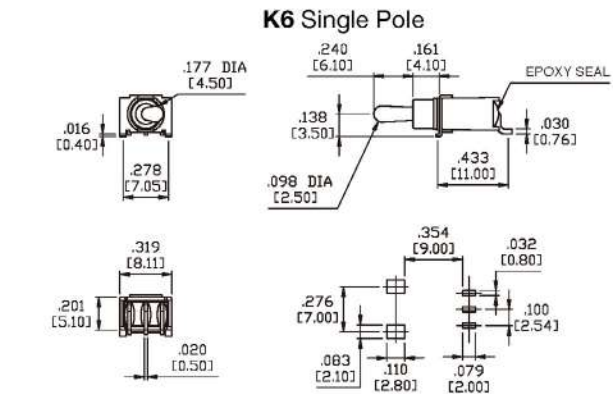

Actuator Options



* Available with L6, S6, K6, M7 terminals only.



2M1H/2MS/2M1


2M-Series

MINIATURE TOGGLES

The 2M family of miniature toggle switches is composed of three switch series; the **2M1-Series** miniature toggle switch, the **2MS-Series** sealed miniature toggle switch, and the **2M1H-Series** premium sealed miniature toggle switch. These series all feature PC mounting and offer a variety of ratings, circuits, contact materials, terminal platings, toggle styles and lengths, and optional color caps.



2M1H-Series

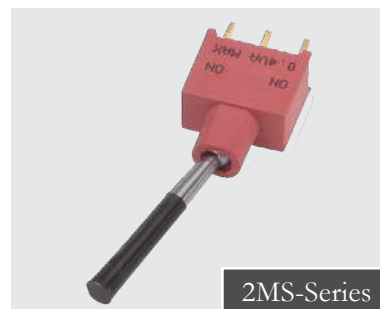

2MS-Series



2M1-Series

Product Highlights:

- ♦ IP67 Sealing
- ♦ 8 Single and Double Pole Circuits
- ♦ Long, Short and Flatted Bushing Options
- ♦ Large Variety of Termination Options
- ♦ Available Gold, Silver and Tin Platings
- ♦ UL Approved
- ♦ Sleek Black Finish

Typical Applications:

- ♦ Telecommunications
- ♦ Instrumentation
- ♦ Networking
- ♦ Medical Equipment
- ♦ Military Communications

Resources:

Download 3D CAD Files

[IGS >](#) [STP >](#)



2M1H-Series
Premium Sealed
Miniature
Toggle Switch



2MS-Series
Sealed
Miniature
Toggle Switch



2M1-Series
Miniature
Toggle Switch

Electrical


Contact Rating	refer to ordering scheme
Electrical Life	50,000 make & break cycles @ full load
Contact Resistance	10 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts
Insulation Resistance	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level

Physical

Operating Temperature	-30°C to +85°C
Index of Protection	<i>2M1H-Series:</i> IP67 <i>2MS-Series:</i> IP67
Solder Heat Resistance	MIL-STD-202, Method 210
Actuator Travel	25°

Material

Case	<i>2M1H-Series & 2M1-Series:</i> Diallyl phthalate (DAP) (UL 94V-0) <i>2MS-Series:</i> Glass filled nylon 6/6, flame retardant, heat stabilized (UL 94V-0)
Toggle	<i>2M1H-Series:</i> Brass, black finish with o-ring seal <i>2MS-Series:</i> Brass, chrome plated, internal o-ring sealed <i>2M1-Series:</i> Brass, chrome plated
Bushing	<i>2M1H-Series:</i> Brass, black finish with o-ring seal <i>2MS-Series:</i> Glass filled nylon 6/6, flame retardant, heat stabilized (UL 94V-0) <i>2M1-Series:</i> Brass, nickel plated
Housing	Stainless Steel
Bracket	<i>2MS-Series:</i> Nylon (UL 94V-0) <i>2M1-Series:</i> Stainless Steel
Actuator Pivot Retainer	<i>2MS-Series:</i> Stainless Steel
Switch Support	Brass, tin plated
Terminal Seal	Epoxy

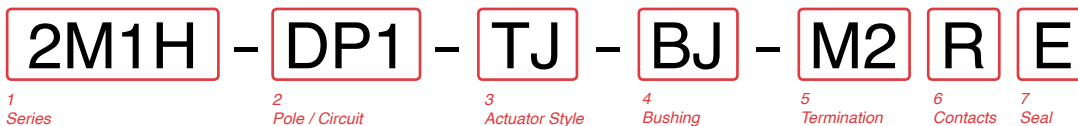

1 SERIES
2M1H Premium Sealed Miniature Toggle Switch

2 POLE / CIRCUIT
() - momentary
Position: 1 2 3

SP1	ON	NONE	ON
SP2	ON	NONE	(ON)
SP3	ON	OFF	ON
SP4	(ON)	OFF	(ON)
SP5	ON	OFF	(ON)
DP1	ON	NONE	ON
DP2	ON	NONE	(ON)
DP3	ON	OFF	ON
DP4	(ON)	OFF	(ON)
DP5	ON	OFF	(ON)
DP6 *	ON	ON	ON
DP7 *	(ON)	ON	(ON)
DP8 *	ON	ON	(ON)

*Center position connects 2-3, 5-4

3 ACTUATOR STYLE
TJ .709" [18 mm] length TK .512" [13.00 mm] length

4 BUSHING
BJ .429" [10.90 mm] threaded, length BK .386" [9.80 mm] threaded, flat

5 TERMINATION 7

M1	Solder Lug	M51	Wire Wrap, .750" [19.05mm] length
M2	PCB	M52	Wire Wrap, .964" [24.48mm] length
M3	Quick Connect	M53	Wire Wrap, .425" [10.80mm] length
		M54	Wire Wrap, 1.062" [25.97mm] length

6 CONTACTS / TERMINALS

	Contact Material	Terminal Plating	Rating	Approvals
G	silver 1	gold over silver	5A 125VAC or 28VDC, 2A 250VAC	UL, IP67
K	gold 2,5	tin 4,7	0.4VA max 20V max (AC/DC)	IP67
P	silver 1,6	tin 4,7	5A 125VAC or 28VDC, 2A 250VAC	UL, IP67
Q	silver 1	silver 1	5A 125VAC or 28VDC, 2A 250VAC	UL, IP67
R	gold 2	gold 3	0.4VA max 20V max (AC/DC)	IP67

7 EPOXY SEAL
E Epoxy Seal

Notes:
Switches supplied with (1) 2M1-HDW4 hex nut and (1) 3MNH-WCP-0872 O-Ring
1 Movable contact and terminal platings: silver over copper alloy
2 Movable contact and terminal platings: gold over nickel over copper alloy
3 Terminal platings: gold over nickel over copper alloy
4 Terminal platings: tin over copper alloy
5 Terminal contact platings: gold over nickel alloy
6 Terminal contact platings: silver over nickel alloy
7 Tin option not available with M1 & M3 terminations.

*Manufacturer reserves the right to change product specification without prior notice.

2MS - **WSP** **1** - **T1** - **B4** - **M1** **G** **E**

1 Series 2 Poles 3 Circuit 4 Actuator Style 5 Bushing 6 Termination 7 Contacts 8 Seal

1 SERIES
2MS Sealed Miniature Toggle Switch



2 POLES
WSP Single pole - uses terminals 1, 2 & 3
WDP Double pole - uses terminals 1, 2, 3, 4, 5 & 6
W3P Three pole - uses terminals 1, 2, 3, 4, 5, 6, 7, 8 & 9

3 CIRCUIT
 () - momentary
Position: **1** **2** **3**
 1 2-3, 5-6, 8-9 Connected Terminals 2-1, 5-4, 8-7
 2 ON NONE ON
 3 ON NONE (ON)
 4 ON OFF ON
 5 (ON) OFF (ON)
 5 ON OFF (ON)

4 ACTUATOR STYLE **T9** Long Black Plastic .492" length
T1 Round Bat **P1** Plastic Anti-Static .496" length
T2 Round Short Bat **P2** Plastic Anti-Static .299" length

5 BUSHING
B1 Threaded, Keyway **B4** Unthreaded, Short, Keyway, Flat

6 TERMINATION
M1⁴ Solder Lug **VS21** Vertical, Snap-In, .460" [11.70mm]
M2 PCB **VS3** Vertical, .630" [16mm]
M3 Quick Connect **VS31** Vertical, Snap-In, .630" [16mm]
M51 Wire Wrap, .750" [19.05mm] **U2** Vertical, .551" [14mm] - only 3PDT
M52 Wire Wrap, .964" [24.48mm] **VS4** Vertical, .461" [11.70mm]
M53 Wire Wrap, .425" [10.80mm] **VS41** Vertical, Snap-In, .461" [11.70mm]
M54 Wire Wrap, 1.062" [25.97mm] **U4** Vertical, .551" [14mm] - only 3PDT
M6 Right Angle, PC Thru-Hole **VS5** Vertical, .630" [16mm]
M61 Right Angle, Snap-In **VS51** Vertical, Snap-In, .630" [16mm]
M7 Vertical, Right Angle, PC Thru-Hole

7 CONTACTS / TERMINALS
Contact Material **Terminal Plating** **Rating** **Approvals**
G silver¹ gold over silver 5A 125VAC or 28VDC, 2A 250VAC  US, IP67
K gold² tin^{3,4} 0.4VA max 20V max (AC/DC) IP67
P silver¹ tin^{3,4} 5A 125VAC or 28VDC, 2A 250VAC  US, IP67
R gold² gold² 0.4VA max 20V max (AC/DC) IP67

8 EPOXY SEAL
E Epoxy Seal **0** without Epoxy Seal

Notes:
 B1 Bushing switches supplied with (2) 2M1-HDW2 nuts, (1) 2M1-HDW11 washer and (1) 2M1-HDW15 locking ring. See page 76-77.
 1 Movable contact & terminal platings: silver over copper alloy
 2 Movable contact & terminal platings: gold over nickel over copper alloy
 3 Terminal platings: tin over nickel over copper alloy
 4 Tin option not available with M1 terminal

2M1 - **SP** **1** - **T1** - **B1** - **M1** **Q** **E**

1 Series 2 Poles 3 Circuit 4 Actuator Style 5 Bushing 6 Termination 7 Contacts 8 Seal

1 SERIES
2M1 Miniature Toggle Switch

2 POLES
SP Single pole - uses terminals 1, 2 & 3
DP Double pole - uses terminals 1, 2, 3, 4, 5 & 6
3P Three pole - uses terminals 1, 2, 3, 4, 5, 6, 7, 8 & 9
4P Three pole - uses terminals 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 & 12







3 CIRCUIT
 () - momentary
Position: **1** **2** **3**
 1 2-3, 5-6, 8-9, 11-12 Connected Terminals 2-1, 5-4, 8-7, 11-10
 2 ON NONE ON
 3 ON NONE (ON)
 4 ON OFF ON
 5 (ON) OFF (ON)
 6* ON OFF (ON)
 7* ON ON ON
 8* (ON) ON (ON)
 8* ON ON (ON)

*Available with DP and 4P switches only. Center position connects 2-3, 5-4, 8-9, 11-10

4 ACTUATOR STYLE **T7** Large Bat (B0 bushing)
T1 Round Bat **T8** X-Large Bat (B0 bushing)
T2 Round Short Bat **T9** Black Plastic
T3 Paddle **T0** Rectangular
T4 Medium Paddle **TA** Locking Lever
T5 Long Paddle **TI** Locking Lever
T6 Flat (B1,B2,B5,BA,BB,BE) **TL** Locking Lever

5 BUSHING **B8** Metric
B1 Threaded Standard, keyway **B9** Splashproof
B2 Non-Threaded Standard, keyway **B0** 15/32" Threaded (Standard for T7 & T8 actuator styles)
B3 Threaded Short, keyway **BA** Threaded for T6
B4 Non-Threaded Short, keyway **BB** Non-Threaded for T6
B5 High Torque, 7.5mm, flat **BE** Threaded Hi Torque for T6
B6 High Torque, 8.0mm, keyway **BL** Threaded, Locking
B7 Long threaded

6 TERMINATION
M1⁴ Solder Lug **M71** Vertical, Right Angle, Snap-In
M2 PCB **VS2** Vertical, .461" [11.70mm]
M3 Quick Connect **VS21** Vertical, Snap-In, .461" [11.70mm]
M51 Wire Wrap, .750" [19.05mm] **VS3** Vertical, .630" [16mm]
M52 Wire Wrap, .964" [24.48mm] **VS31** Vertical, Snap-In, .630" [16mm]
M53 Wire Wrap, .425" [10.80mm] **VS4** Vertical, .461" [11.70mm]
M54 Wire Wrap, 1.062" [25.97mm] **VS41** Vertical, Snap-In, .461" [11.70mm]
M6 Right Angle, PC Thru-Hole **VS5** Vertical, .630" [16mm]
M61 Right Angle, Snap-In **VS51** Vertical, Snap-In, .630" [16mm]
M7 Vertical, Right Angle, PC Thru-Hole

7 CONTACTS / TERMINALS
Contact Material **Terminal Plating** **Rating** **Approvals**
G silver¹ gold over silver 5A 125VAC or 28VDC, 2A 250VAC   IP67
K gold² tin^{3,4} 0.4VA max 20V max (AC/DC) N/A
P silver¹ tin^{3,4} 5A 125VAC or 28VDC, 2A 250VAC   IP67
Q silver¹ silver¹ 5A 125VAC or 28VDC, 2A 250VAC   IP67
R gold² gold² 0.4VA max 20V max (AC/DC) N/A

8 EPOXY SEAL
E Epoxy Seal **0** without Epoxy Seal

Notes:
 B1 Bushing switches supplied with (2) 2M1-HDW2 nuts, (1) 2M1-HDW11 washer and (1) 2M1-HDW15 locking ring.
 1 Movable contact & terminal platings: silver over copper alloy
 2 Movable contact & terminal platings: gold over nickel over copper alloy
 3 Terminal platings: tin over nickel over copper alloy
 4 Tin option not available with M1 terminal

2M-Series Accessories

To order accessories assembled on a switch, specify the switch number followed by the accessory part number and the word "assembled". Ex: 2M1-SP1-T1-B1-M1QE-T12 ASSEMBLED. To order accessories in bulk, specify the Series, followed by the accessory. Ex: 2M1-T12. See page 76 for dimensional specifications.

Optional Toggle Cap

2M1 - **T1** **2**

1 Series 2 Toggle Cap Size 3 Color

1 SERIES
2M1 Fits 2M1H, 2MS or 2M1

3 CAP COLOR

1 White	5 Yellow
2 Black	6 Green
3 Red	7 Blue

2 TOGGLE CAP SIZE

T1 10.6 mm	T2 7.6 mm
-------------------	------------------

Optional Dress and Knurled Nuts

2M1 - **HDW3**

1 Series 2 Nut

1 SERIES
2M1 Fits 2M1H, 2MS or 2M1

2 NUT
HDW3 Dress nut for 1/4" bushing
HDW5 Knurled nut for 15/32" bushing (2M1-Series only)

Optional Rubber Seals

2M1 - **E1A**

1 Series 2 Rubber Boot Seal

1 SERIES
2M1 Fits 2M1H, 2MS or 2M1

2 RUBBER BOOT SEAL

E1A	1/4 - 40" UNS bushing (Not available for B0 bushing option)
K1	Metric M6 bushing (B8 bushing only)
YE1D	15/32 - 32" UNS bushing (TJ, TK and B0 bushings only)
YE1E	15/32 - 32" UNS bushing 1/2 boot (T7, T8, TJ, TK and B0 bushings only)


3MNH - **WCP-0872**

1 Series 2 Rubber O-Ring


1 SERIES
3MNH Fits 3MNH or 2M1H

2 RUBBER O-RING
WCP-0872 For 15/32 bushing option

2M1H-Series Dimensional Specifications: in. [mm]

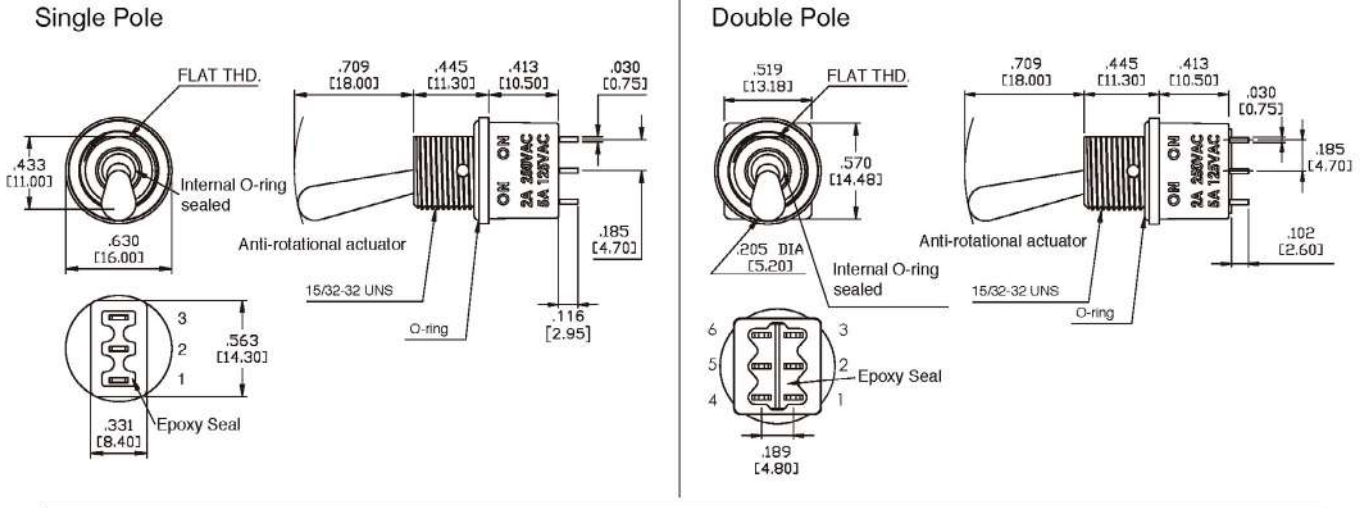


Actuator Options



OPTION CODE	DIM. "A"
TJ	.709 [18.00]
TK	.512 [13.00]


Bushing Options & Mounting

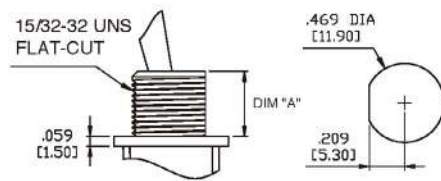


OPTION CODE	DIM. "A"
BJ	.429 [10.90]
BK	.388 [9.80]

Termination Options


M1 Standard Solder Lug




M2 PC Thru-Hole



M3 Quick Connect




M5 Wire Wrap




OPTION CODE	DIM. "A"
M5-1	.750 [19.05]
M5-2	.964 [24.48]
M5-3	.425 [10.80]
M5-4	1.062 [26.97]

2MS-Series Dimensional Specifications: in. [mm]


Single Pole

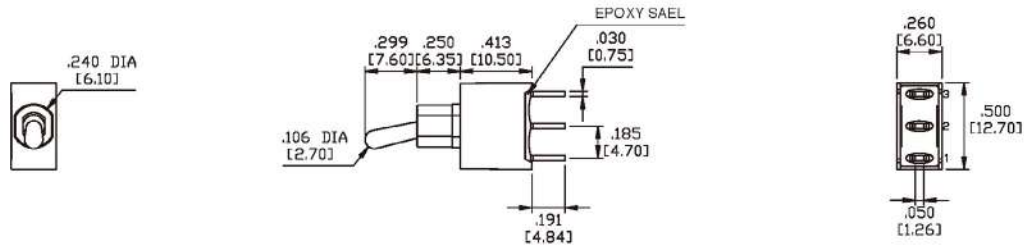

Double Pole

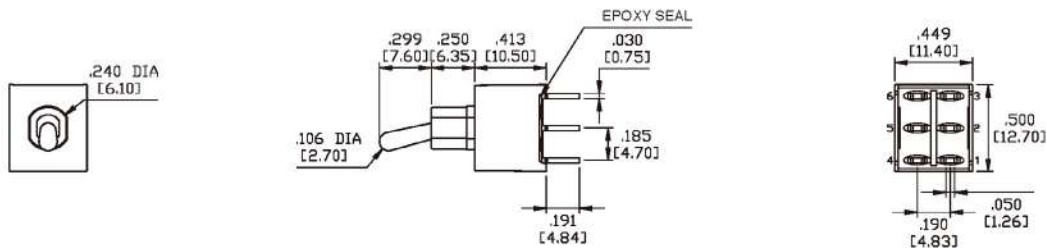


Three Pole

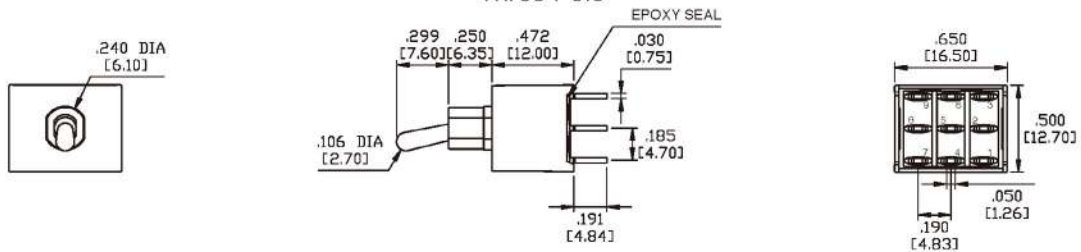


Actuator Options


T1



T2




T9 with Plastic Cap





NO.	COLOR
1	White
2	Black(std.)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

P1 Plastic Toggle



P2 Plastic Toggle




* Shown with B4 bushing. Subtract .075" (1.90 mm) from actuator height for B1 bushing.


2MS-Series Dimensional Specifications: in. [mm]

Bushing Options

B1




B4




Termination Options


M1 Standard Solder Lug




M2 PC Thru-Hole



M3 Quick Connect






M5 Wire Wrap




OPTION CODE	DIM.'A'
M5-1	.750 [19.05]
M5-2	.964 [24.48]
M5-3	.425 [10.80]
M5-4	1.062 [26.97]




M6 Single Pole

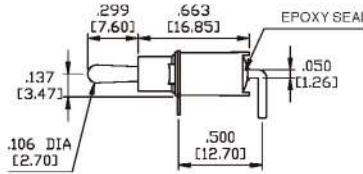


P.C. MOUNTING






M6 Double Pole

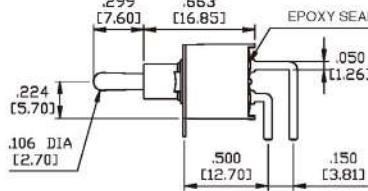


P.C. MOUNTING






M6 Three Pole

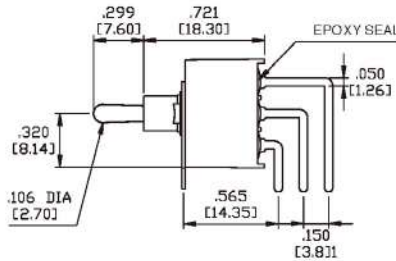


P.C. MOUNTING



M7 Single Pole

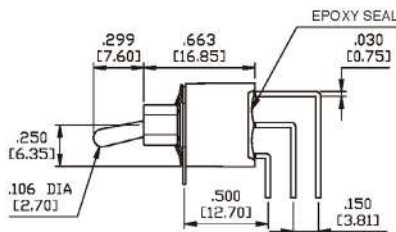




P.C. MOUNTING




2MS-Series Dimensional Specifications: in. [mm]

Termination Options




M7 Double Pole

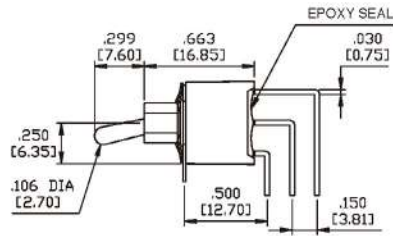


P.C. MOUNTING





M7 Three Pole

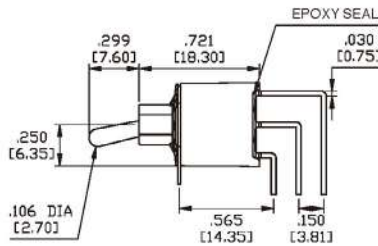

P.C. MOUNTING




VS2-VS3 Single Pole





OPTION CODE	DIM. 'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C. MOUNTING




VS2-VS3 Double Pole





OPTION CODE	DIM. 'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C. MOUNTING




U2-VS3 Three Pole



OPTION CODE	DIM. 'A'
U2	.551 [14.00]
VS3	.630 [16.00]



P.C. MOUNTING



2MS-Series Dimensional Specifications: in. [mm]


Termination Options

VS4-VS5 Single Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




VS4-VS5 Double Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




U4-VS5 Three Pole




OPTION CODE	DIM.'A'
U4	.551 [14.00]
VS5	.630 [16.00]

P.C.MOUNTING




Snap-In Termination Options


M61

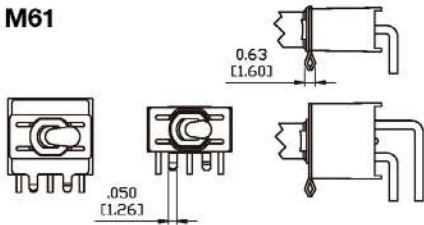


VS21, VS31



M71

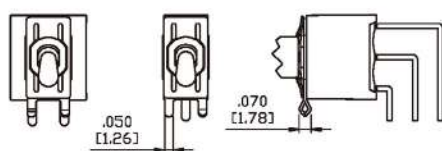


VS41, VS51

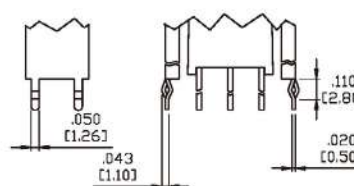


* PC Mounting for M61, M71, VS21, VS31, VS41, VS51 refer to M6, M7, VS2, VS3, VS4, VS5 respectively.


2M1-Series Dimensional Specifications: in. [mm]

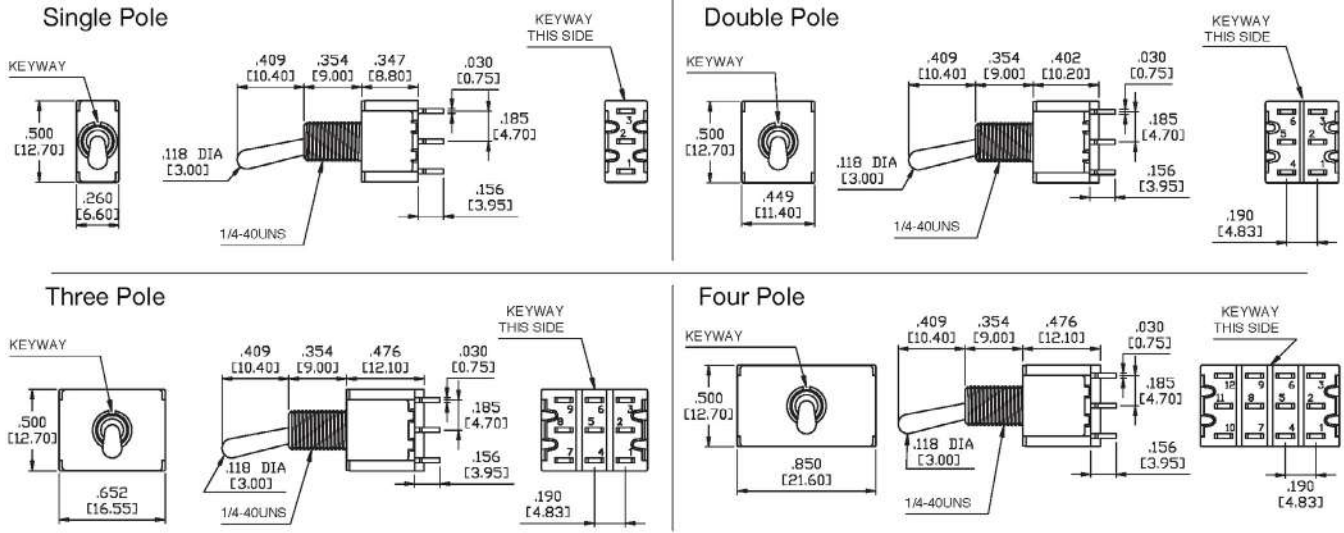


Actuator Options for Panel Rear Mount

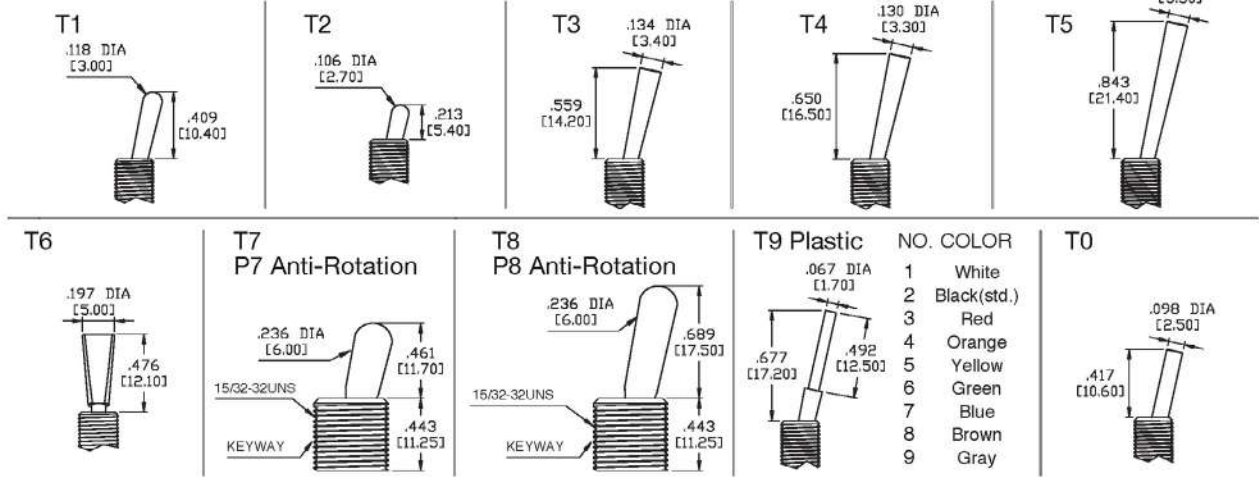

* T6 actuator is available with B1, B2, B5, B6, BA, BB & BE bushing. Actuator length shown for T1 - T5, T9 and T0 is with B1 bushing. T7, P7, T8 & P8 does not require a bushing code.

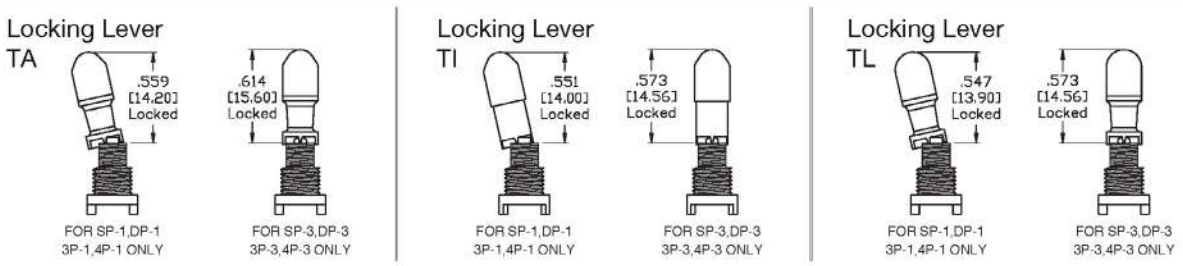


Bushing Options

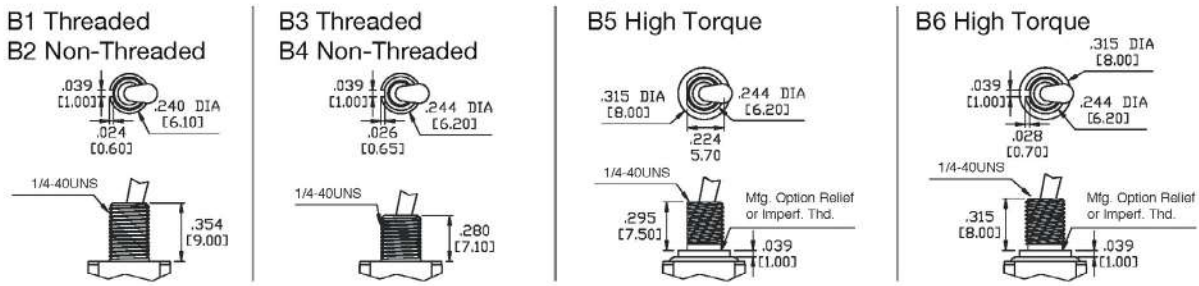


2M1-Series Dimensional Specifications: in. [mm]

Bushing Options


B7 Long




B8 Metric




B9 Splash-Proof




BL Locking Lever




BA Threaded for T6



BB Non-Threaded for T6




BB High Torque for T6




Panel Mounting

1/4 INCH BUSHING

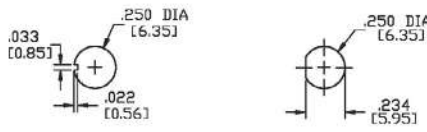


15/32 INCH BUSHING

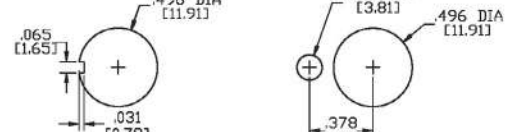


Termination Options


M1 Standard Solder Lug




M2 PC Thru-Hole



M3 Quick Connect






M5 Wire Wrap




OPTION CODE	DIM.'A'
M5-1	.750 [19.05]
M5-2	.964 [24.48]
M5-3	.425 [10.80]
M5-4	1.062 [26.97]




M6 Single Pole




P.C.MOUNTING



M6 Double Pole






P.C.MOUNTING




2M1-Series Dimensional Specifications: in. [mm]

Termination Options




M6 Three Pole .244 DIA [6.20]

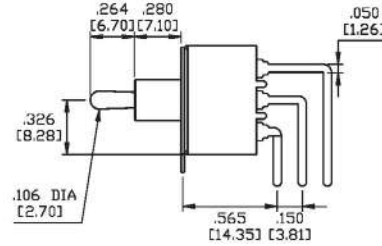


P.C.MOUNTING






M7 Single Pole .244 DIA [6.20]

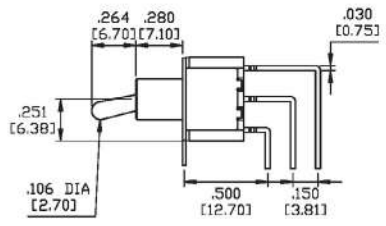


P.C.MOUNTING






M7 Double Pole .244 DIA [6.20]

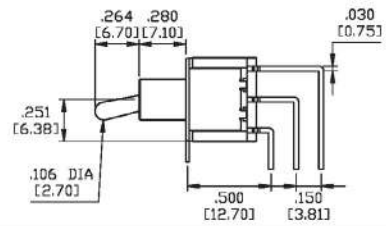


P.C.MOUNTING






M7 Three Pole .244 DIA [6.20]

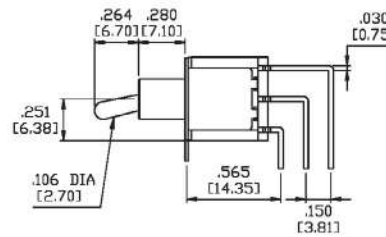


P.C.MOUNTING





M7 Four Pole

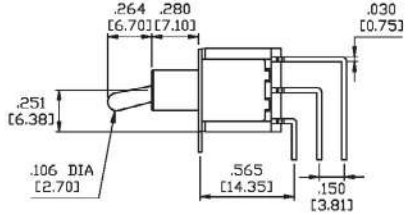

P.C.MOUNTING




VS2-VS3 Single Pole



OPTION CODE	DIM. 'A'
VS2	.461 [11.70]
VS3	.630 [16.00]



P.C.MOUNTING



2M1-Series Dimensional Specifications: in. [mm]


Termination Options

VS2-VS3 Double Pole





OPTION CODE	DIM.'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C. MOUNTING




VS4-VS5 Single Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C. MOUNTING




VS4-VS5 Double Pole




OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C. MOUNTING




Snap-In Termination Options


M61 (available with SP & DP)




VS21, VS31

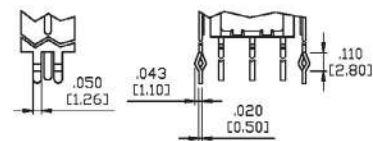

M71 (available with SP & DP)

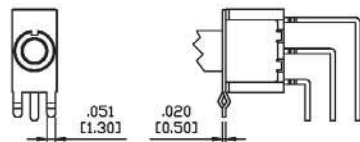

VS41, VS51

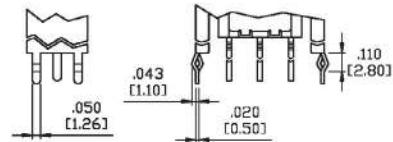


* PC Mounting for M61, M71, VS21, VS31, VS41, VS51 refer to M6, M7, VS2, VS3, VS4, VS5 respectively.

3SS/3S1/3SM

3S-Series

SUB-MINIATURE PUSHBUTTONS

The 3S family of sub-miniature pushbutton switches is composed of three switch series; the **3S1-Series** sub-miniature pushbutton switch, the **3SS-Series** sealed sub-miniature pushbutton switch, and the **3SM-Series** surface mount sealed sub-miniature pushbutton switch. All switches are available with a variety of rating, termination and actuator choices, and will withstand temperatures from -30°C to +85°C.

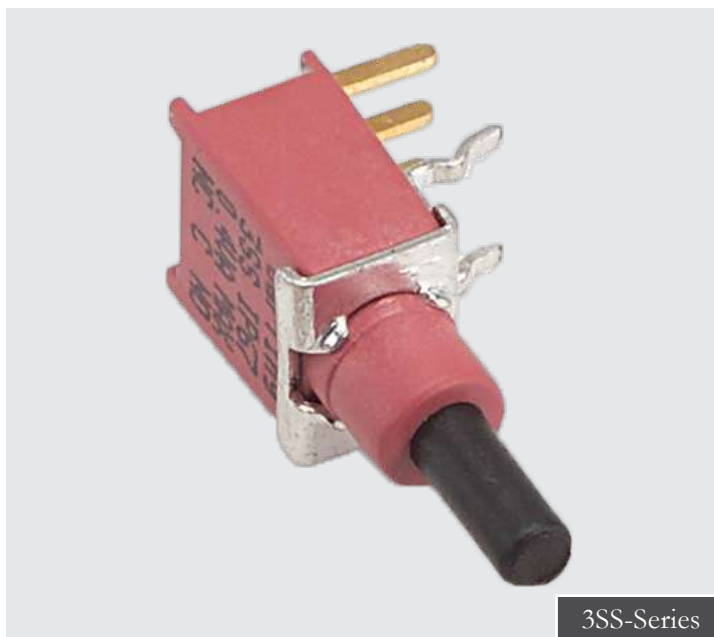

Product Highlights:

- ♦ IP67 Sealing
- ♦ AC or Low Voltage DC Rated
- ♦ Snap-in, PC or Surface Mounting
- ♦ Bulk Packed or Tape Reel

Typical Applications:


- ♦ Telecommunications
- ♦ Performance Audio
- ♦ Networking
- ♦ Computers
- ♦ Instrumentation
- ♦ Low Power On/Off Designs

Resources:

Download 3D CAD Files




[IGS >](#) [STP >](#)

3SS-Series Dimensional Specifications: in. [mm]

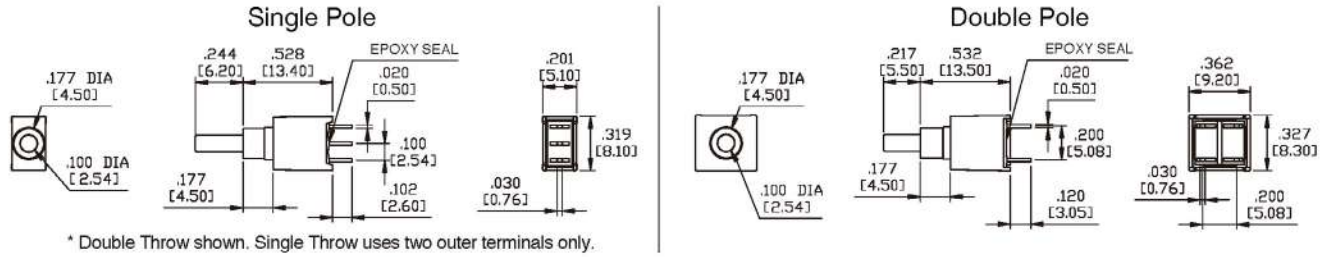


Termination Options

M6 Single Pole






P.C.MOUNTING




* Double Throw shown. Single Throw uses two outer terminals only.




M6 Double Pole




P.C.MOUNTING



M7 Single Pole


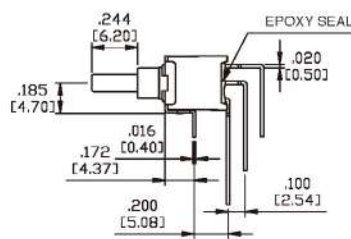



P.C.MOUNTING




* Double Throw shown. Single Throw uses two outer terminals only.

M7 Double Pole





P.C.MOUNTING




3SS-Series Dimensional Specifications: in. [mm]

Termination Options

VS2 Single Pole





P.C. MOUNTING




* Double Throw shown. Single Throw uses outer terminals only.

VS2 Double Pole




P.C. MOUNTING




Snap-In Termination Options


M61



M71




VS21

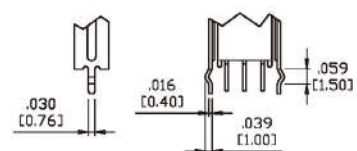

* PC Mounting for M61, M71, VS21 refer to M6, M7, VS2 respectively.



3S1-Series Dimensional Specifications: in. [mm]

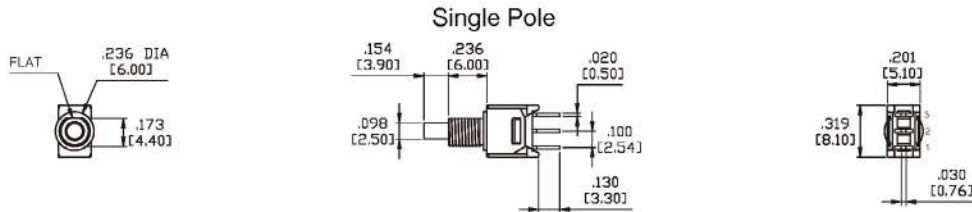


* Double Throw shown. Single Throw uses two outer terminals only.

Actuator Options for Snap-In Front Mount

OP1


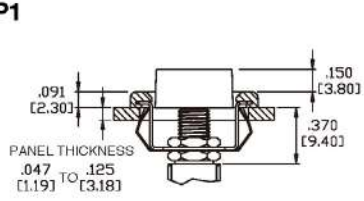


PANEL MOUNTING




* Increase this dimension to .620/.625 [15.75/15.88] for .091/.125[2.31/3.18] thk. panels.

OP1 Without Frame






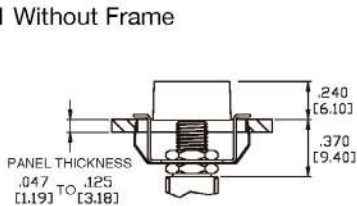


PANEL MOUNTING




* Increase this dimension to .620/.625 [15.75/15.88] for .091/.125[2.31/3.18] thk. panels.

Bushing Options

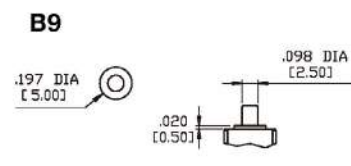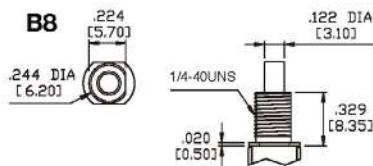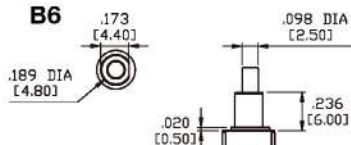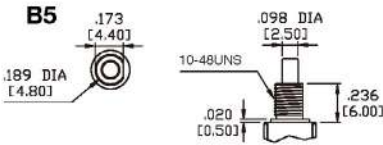


Termination Options

M1






M2




3S1-Series Dimensional Specifications: in. [mm]

Termination Options

M6 Single Pole






P.C. MOUNTING




* Double Throw shown.
Single Throw uses two outer terminals only.

M7 Single Pole

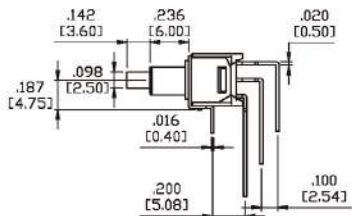



P.C. MOUNTING




* Double Throw shown.
Single Throw uses two outer terminals only.

VS2 Single Pole




P.C. MOUNTING




* Double Throw shown. Single Throw uses outer terminals only.

Snap-In Termination Options


M61



M71




VS21




* PC Mounting for M61, M71, VS21 refer to M6, M7, VS2 respectively.

3SM-Series Dimensional Specifications: in. [mm]


K6 Single Pole

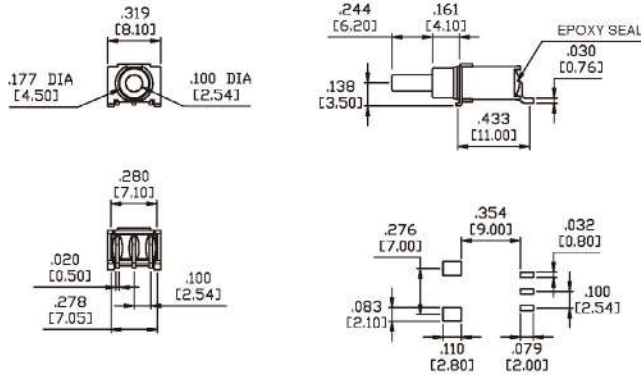


M6 Single Pole

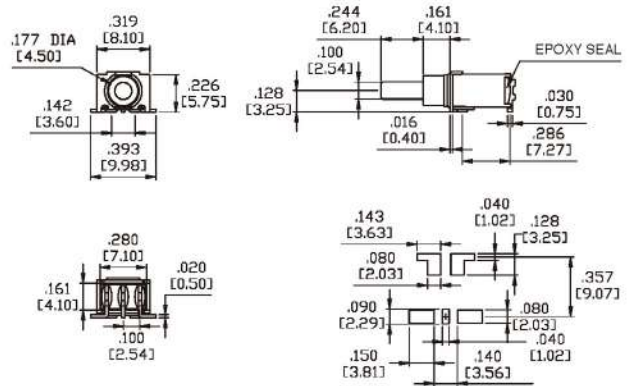

M7 Single Pole

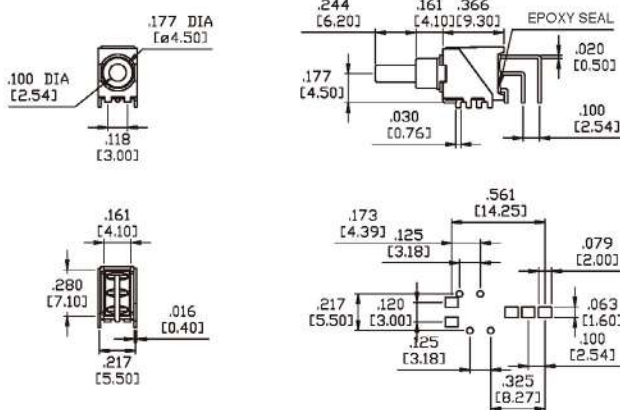


S6 Single Pole

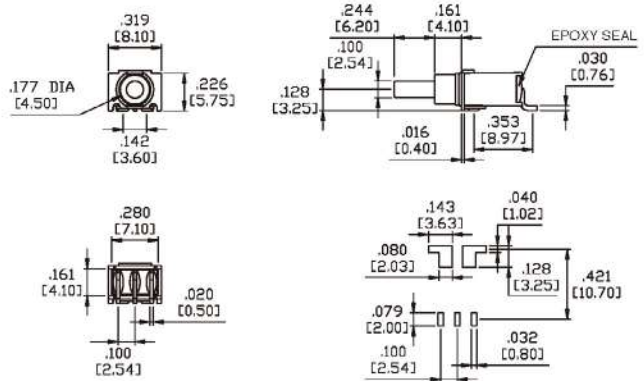

* Double Throw shown. Single Throw uses two outer terminals only.


Plunger Caps

C1



* MATERIAL: ABS.

C2



* MATERIAL: ABS.

CAP COLORS

1	White	6	Green
2	Black	7	Blue
3	Red	8	Brown
4	Orange	9	Gray
5	Yellow		

3MS/3MN/3MA


3M-Series

MINIATURE PUSHBUTTONS

The 3M family of miniature pushbutton switches is composed of four switch series; the **3MNH-Series** premium sealed snap-action pushbutton, the **3MN-Series** snap-action pushbutton, the **3MS-Series** sealed snap-action pushbutton, and the **3MA-Series** alternate-action pushbutton. These PC mount pushbutton switches offer a variety of ratings, circuits, contact materials, terminal platings, pushbutton styles, and optional color caps.



3MNH-Series



3MS-Series



3MN-Series



3MA-Series

Product Highlights:

- ♦ IP67 Sealing
- ♦ Snap Action Contact Mechanism
- ♦ Variety of Plunger and Bushing Lengths
- ♦ Up to 14 Termination Choices
- ♦ UL and cUL Approvals
- ♦ Sleek Black Finish

Typical Applications:

- ♦ Telecommunications
- ♦ Performance Audio
- ♦ Networking
- ♦ Computers
- ♦ Instrumentation
- ♦ Low Power On/Off Designs

Resources:

Download 3D CAD Files

[IGS >](#) [STP >](#)



3MNH-Series
Premium Sealed
Miniature Pushbutton Switch



3MS-Series
Sealed Snap-Action
Miniature Pushbutton Switch



3MN-Series
Snap-Action
Miniature Pushbutton Switch



3MA-Series
Alternate Action
Miniature Pushbutton Switch

Electrical

Contact Rating	refer to ordering scheme
Electrical Life	50,000 make & break cycles @ full load
Contact Resistance	<i>3MS-Series:</i> 50 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts. <i>3MN, 3MA & 3NMH-Series:</i> 10 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts.
Insulation Resistance	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level

Physical

Operating Temperature	-30°C to +85°C
Index of Protection	<i>3MS-Series:</i> IP68 <i>3MNH-Series:</i> IP67
Cap Installation Support	<i>3MS-Series:</i> 10 lbs. max.
Solder Heat Resistance	MIL-STD-202, Method 210

Material

Case	<i>3MS-Series:</i> Glass filled nylon 6/6, flame retardant, heat stabilized (UL94V-0) <i>3MN, 3MA & 3NMH-Series:</i> Dially phthalate (DAP) (UL 94V-0)
Plunger	<i>3MS & 3MA-Series:</i> Glass filled nylon or glass filled polyester (UL94V-0) <i>3MN-Series:</i> Thermoplastic polyester, black <i>3NMH-Series:</i> Brass, black finish with o-ring seal
Bushing	<i>3MN-Series:</i> Brass, nickel plated <i>3MA-Series:</i> Zinc, nickel plated <i>3NMH-Series:</i> Brass, black finish with o-ring seal
Housing	<i>3MN & 3MA-Series:</i> Stainless Steel
Switch Support Retainer	<i>3MS-Series:</i> Stainless Steel
Terminal Seal	Epoxy

*Manufacturer reserves the right to change product specification without prior notice.

3MNH - DP 1 - PJ - BJ - M2 - Q E

1 Series 2 Pole 3 Circuit 4 Plunger 5 Bushing 6 Termination 7 Contacts 8 Seal

1 SERIES
3MNH Premium Sealed Miniature Pushbutton Switch

2 POLES
SP Single pole - uses terminals 1, 2 & 3
DP Double pole - uses terminals 1, 2, 3, 4, 5 & 6

3 CIRCUIT
 () - momentary
Switching Position:

	1	2
1	ON	ON
7	ON	(ON)

Note: Plunger at rest in Position 1. Plunger depressed in Position 2.

4 PLUNGER 1
PJ .325 height [8.25 mm]
PA .157 height [4.00 mm]
PB .354 height [9.00 mm]

5 BUSHING 2
BJ 3 Threaded 15/32, flat, .553 height [14.05 mm]
BL 4 Threaded 15/32, flat, .295 height [7.49 mm]

6 TERMINATION
M1 Solder Lug
M2 PC thru-hole
M51 Wire wrap, .711" [18.05 mm]
M52 Wire wrap, .924" [23.48 mm]
M53 Wire wrap, .386" [9.80 mm]

7 CONTACTS / TERMINALS

	Contact Material	Terminal Plating	Rating	Approvals
G	silver ⁵	gold over silver	(SP1, DP1) 6A@125VAC or 28VDC 3A@250VAC (SP7, DP7) 1A@120VAC or 38VDC	c us, IP67
Q	silver ⁵	silver ⁵	(SP1, DP1) 6A@125VAC or 28VDC 3A@250VAC (SP7, DP7) 1A@120VAC or 38VDC	c us, IP67
R	gold ⁶	gold ⁷	0.4VA max @ 20V max (AC/DC)	N/A

8 EPOXY SEAL
E Epoxy Seal

- Notes:
- 1 PJ Plunger for maintained circuits only. PA and PB Plunger for momentary circuits only
 - 2 Hardware includes (1) 2M1-HDW4 nut and (1) 3MNH-WCP-0872 o-ring
 - 3 BJ Bushing only available with PJ Plunger
 - 4 BL Bushing only available with PA or PB Plunger
 - 5 Movable contact & terminal platings: silver over copper alloy
 - 6 Movable Contact platings: gold over nickel over copper alloy
 - 7 Terminal platings: gold over nickel over copper alloy

3MS WSP E P1 B1 M6 Q E

1 Series 2 Pole 3 Circuit 4 Actuator Style 5 Bushing 6 Termination 7 Contacts 8 Seal

1 SERIES
3MS Sealed Snap-Action Miniature Pushbutton Switch

2 POLES
WSP Single pole - uses terminals 1, 2 & 3
WDP Double pole - uses terminals 1, 2, 3, 4, 5 & 6

3 CIRCUIT
 () - momentary
Switching Position:

	1	2
7	2-3, 5-6 ON	2-1, 5-4 (ON)

Note: Plunger at rest in Position 1. Plunger depressed in Position 2.

4 ACTUATOR STYLE
P1 Standard Plunger
P2 Long Plunger
P3 Short Plunger

5 BUSHING
B1 1 Threaded, with keyway, .350 height [8.89 mm]
B4 Unthreaded, flatted, .250 height [6.35 mm]

6 TERMINATION
M1 Solder Lug
M2 PCB
M6 PC Mount, 90° horizontal
M61 Snap-In, 90° horizontal
M7 PC Mount, 90° vertical
M71 Snap-In, 90° vertical
VS2 PC Mount, U bracket, .620" mounting x .461" height
VS21 Snap-In, U bracket, .620" mounting x .461" height
VS3 PC Mount, U bracket, .620" mounting x .630" height
VS31 Snap-In, vertical, .630" height
VS4 PC Mount, U bracket, .750" mounting x .461" height
VS41 Snap-In, vertical, .461" height
VS5 PC Mount, U bracket, .750" mounting x .630" height
VS51 Snap-In, vertical, .630" height


7 CONTACTS / TERMINALS

	Contact Material	Terminal Plating	Rating	Approvals
G	silver ³	gold over silver	1A 120VAC or 38VDC	c us, IP68
Q	silver ³	silver ³	1A 120VAC or 38VDC	c us, IP68
R	gold ²	gold ²	0.4VA max 20V max (AC/DC)	IP68


8 EPOXY SEAL
E Epoxy Seal **0** without Epoxy Seal

- Notes:
- 1 Hardware includes (2) 2M1-HDW2 nuts, (1) 2M1-HDW11 washer, and (1) 2M1-HDW15 locking ring
 - 2 Movable contact and terminal platings: gold over nickel over copper alloy
 - 3 Movable contact and terminal platings: silver over copper alloy

3MN-Series with Square Actuator

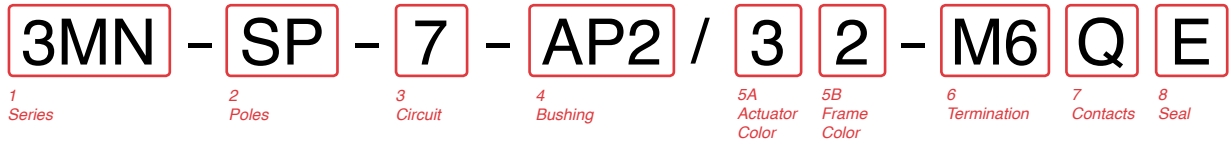

3MN-Series with Plunger Actuator

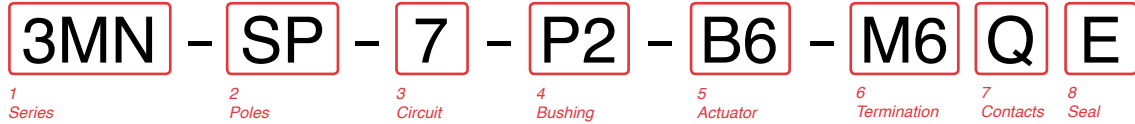

1 SERIES
3MN Snap-Action Miniature Pushbutton Switch

2 POLES
SP Single pole - uses terminals 1, 2 & 3
DP Double pole - uses terminals 1, 2, 3, 4, 5 & 6

3 CIRCUIT
 () - momentary
Switching Position:

	1	2
	2-3, 5-6	2-1, 5-4
7	ON	(ON)

Note: Plunger at rest in Position 1. Plunger depressed in Position 2.

4 ACTUATOR
Square Actuator (use with Color Options in Selection 5A & 5B)
AP1 Square with no frame
AP2 Square raised above frame
AP3 Square flush with frame
Plunger Actuator (use with Bushing Options in Selection 5)
P0 Flush Plunger
P1 Standard Plunger
P2 Short Plunger

5A ACTUATOR COLOR & 5B FRAME COLOR ^{3,4}

1 White	4 Orange	7 Blue
2 Black	5 Yellow	8 Brown
3 Red	6 Green	9 Gray

OR

5 BUSHING
B6 ¹ Unthreaded (for terminations VS6-VS9 only)
B10 ¹ Threaded keyway
B11 ² Threaded with flat
B20 Unthreaded keyway
B21 Unthreaded with flat

6 TERMINATION
M1 Solder Lug
M2 PCB
M51 Wire Wrap .750 [19.05]
M52 Wire Wrap .964 [24.40]
M53 Wire Wrap .425 [10.80]
M6 PC Mount, 90° horizontal
M7 PC Mount, 90° vertical
VS2 PC Mount, U bracket, .620" mounting x .461" height
VS3 PC Mount, U bracket, .620" mounting x .630" height
VS4 PC Mount, U bracket, .750" mounting x .461" height
VS5 PC Mount, U bracket, .750" mounting x .630" height
VS6 PC Mount, U bracket, .461" height (for B6 bushing only)
VS7 PC Mount, U bracket, .630" height (for B6 bushing only)
VS8 PC Mount, U bracket, .461" height (for B6 bushing only)
VS9 PC Mount, U bracket, .630" height (for B6 bushing only)





7 CONTACTS / TERMINALS

	Contact Material	Terminal Plating	Rating	Approvals
G	silver ⁵	gold over silver	1A 125VAC or 28VDC	
Q	silver ⁵	silver ⁵	1A 125VAC or 28VDC	
R	gold ⁶	gold ⁶	0.4VA max 20V max (AC/DC)	N/A


8 EPOXY SEAL
E Epoxy Seal **0** without Epoxy Seal

- Notes:
- Hardware includes (2) 2M1-HDW2 nuts, (1) 2M1-HDW11 washer, and (1) 2M1-HDW15 locking ring
 - Hardware includes (2) 2M1-HDW2 nuts, (1) 2M1-HDW11 washer, and (1) 2M1-HDW16 locking ring
 - Tin option available with PC type terminations only.
 - Selection 5B is blank if actuator style is AP1 (no frame)
 - Black, white and red are standard. Other colors available, consult factory for details.
 - Movable contact & terminal platings: silver over copper alloy
 - Movable contact & terminal platings: gold over nickel over copper alloy


3MNH-Series Dimensional Specifications: in. [mm]

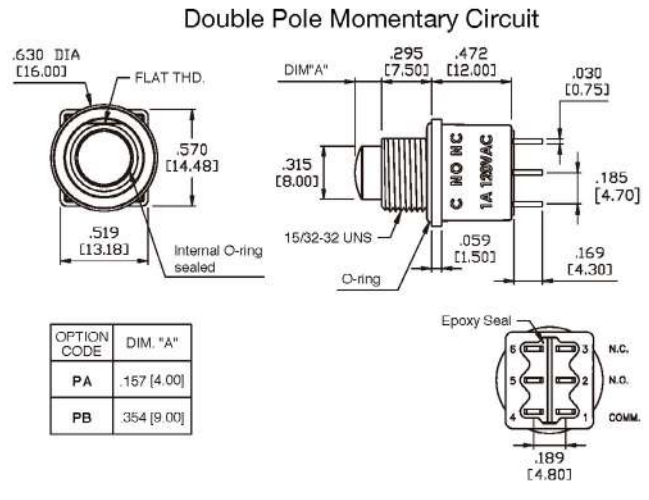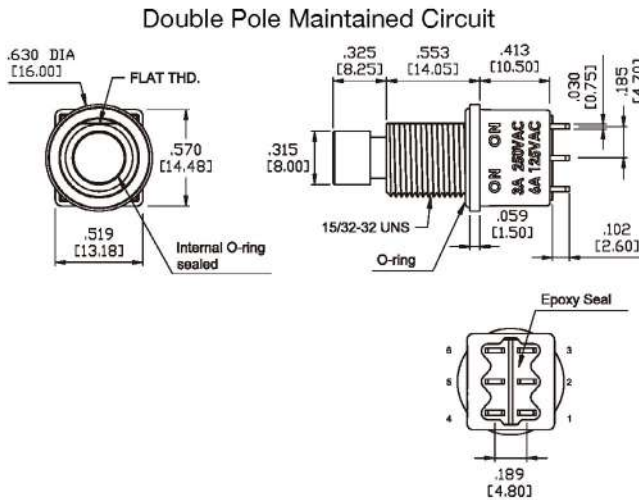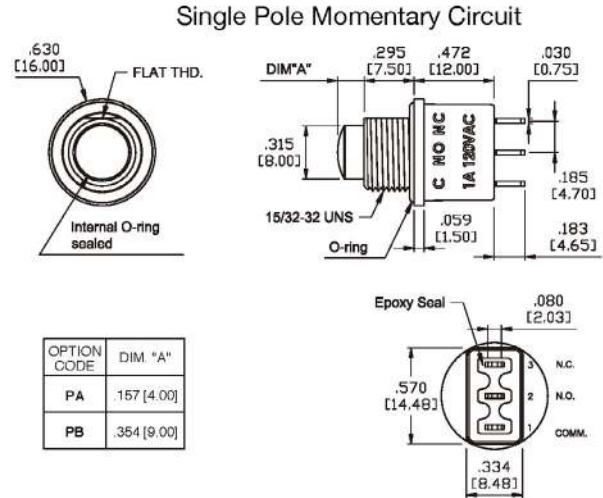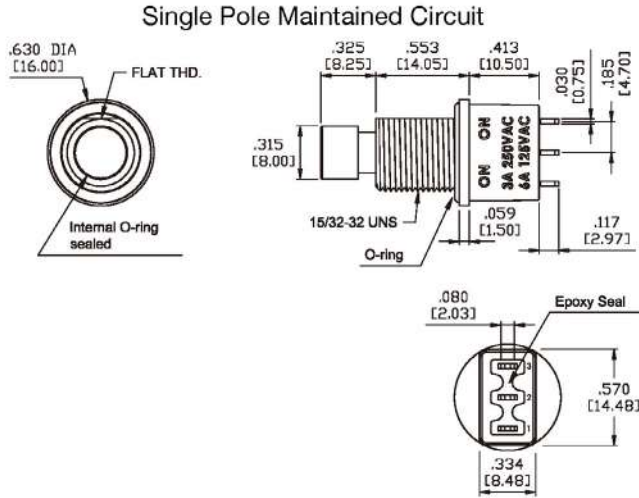

Panel Mounting

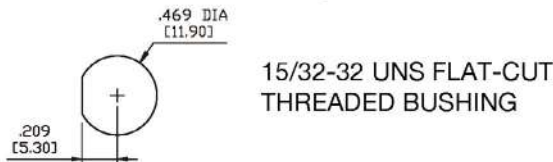


M1 Standard Solder Lug

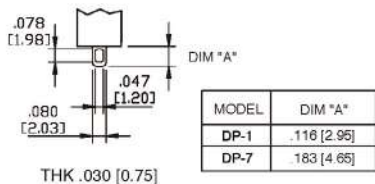


Termination Options




M2 PC Thru-Hole



M5 Wire Wrap

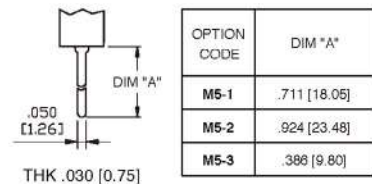


3MS-Series Dimensional Specifications: in. [mm]

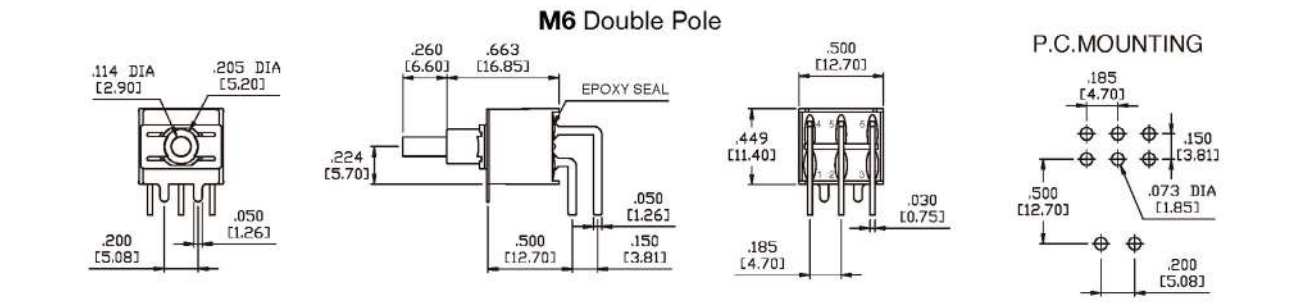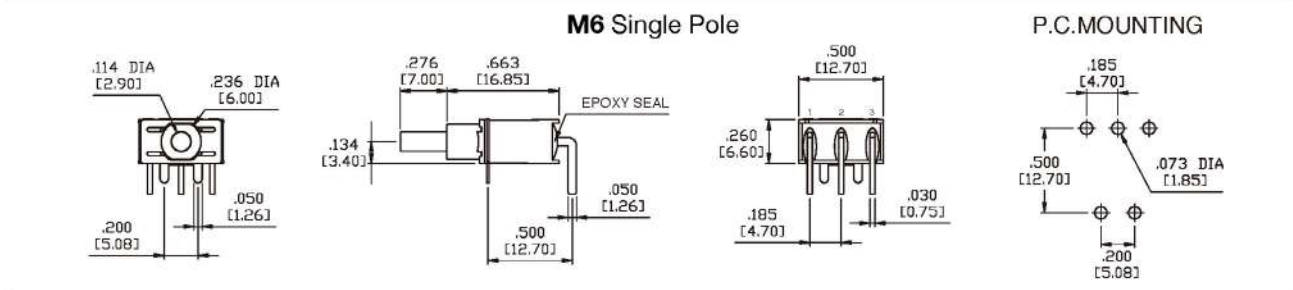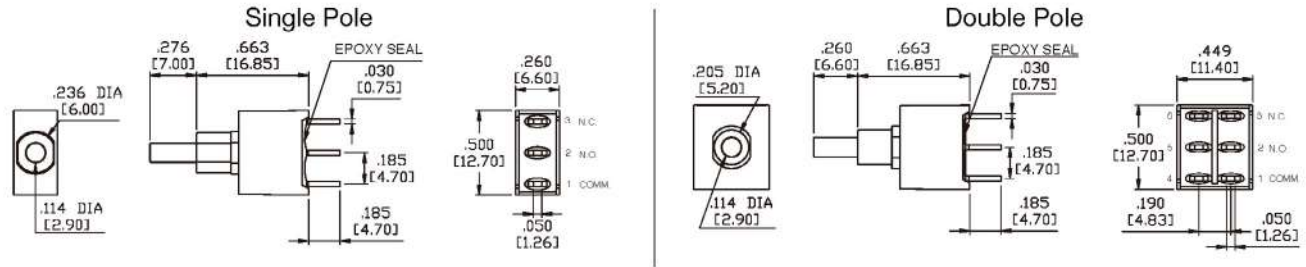


Plunger Options

For B1 Bushing



OPTION CODE	DIM. "A"
P1	.181 [4.60]
P2	.228 [5.80]
P3	.087 [2.20]


For B4 Bushing




OPTION CODE	DIM. "A"
P1	.276 [7.00]
P2	.323 [8.20]
P3	.181 [4.60]

Bushing Options

B1




B4




3MS-Series Dimensional Specifications: in. [mm]

Termination Options




M1




M2






M7 Single Pole

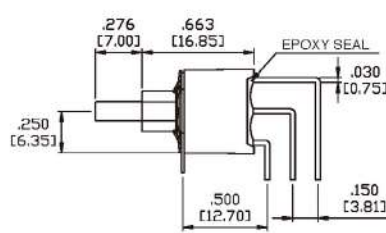


P.C. MOUNTING





M7 Double Pole

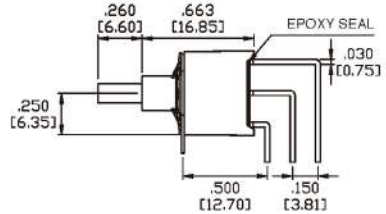

P.C. MOUNTING




VS2-VS3 Single Pole





OPTION CODE	DIM. 'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C. MOUNTING




VS2-VS3 Double Pole



OPTION CODE	DIM. 'A'
VS2	.461 [11.70]
VS3	.630 [16.00]



P.C. MOUNTING



3MS-Series Dimensional Specifications: in. [mm]


Termination Options

VS4-VS5 Single Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




VS4-VS5 Double Pole




OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




Snap-In Termination Options


M61

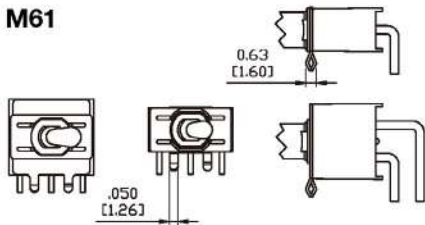


VS21, VS31



M71

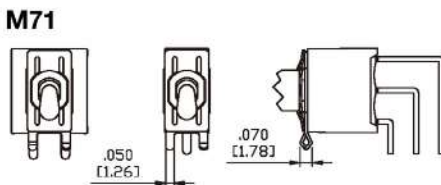


VS41, VS51

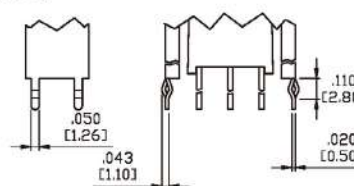


* PC Mounting for M61, M71, VS21, VS31, VS41, VS51 refer to M6, M7, VS2, VS3, VS4, VS5 respectively.

3MN-Series Dimensional Specifications: in. [mm]

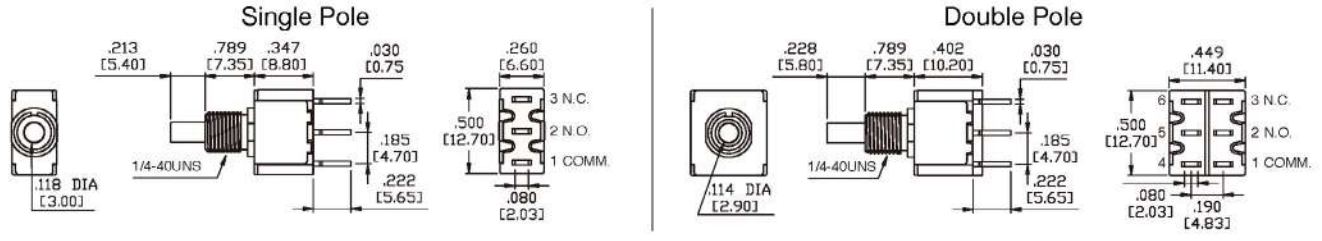


Plunger Options


For B1, B2, B3, B4 Bushing




For B6 Bushing




AP1



Actuator Options for Snap-In Front Mount


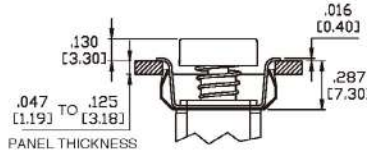


PANEL MOUNTING




* Increase this dimension to .620/.625 [15.75/15.88] for .091/.125 [2.31/3.18] thk. panels.

AP2 with Frame

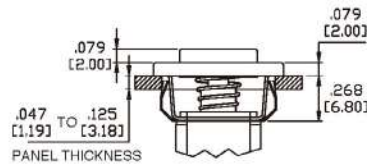



PANEL MOUNTING




* Increase this dimension to .620/.625 [15.75/15.88] for .091/.125 [2.31/3.18] thk. panels.

AP3 Flush CAP

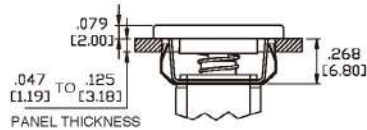


PANEL MOUNTING




* Increase this dimension to .620/.625 [15.75/15.88] for .091/.125 [2.31/3.18] thk. panels.

Bushing Options


B1 Threaded Standard
B2 Non-Threaded



B3 Threaded Standard
B4 Non-Threaded




B6 Non-Threaded
(FOR TERMINATION OPTIONS VS6-VS9 ONLY)




3MN-Series Dimensional Specifications: in. [mm]

Termination Options


M1 Standard Solder Lug



M2 PC Thru-Hole






M5 Wire Wrap




OPTION CODE	DIM. "A"
M5-1	.750 [19.05]
M5-2	.964 [24.48]
M5-3	.425 [10.80]




M6 Single Pole




P.C. MOUNTING






M6 Double Pole

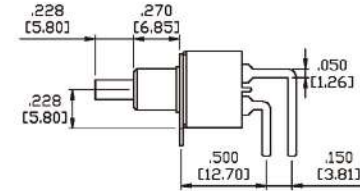


P.C. MOUNTING






M7 Single Pole

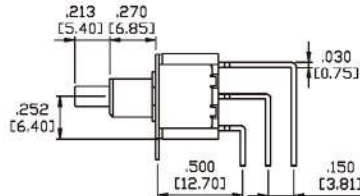


P.C. MOUNTING





M7 Double Pole

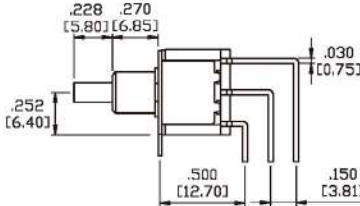

P.C. MOUNTING




VS2-VS3 Single Pole



OPTION CODE	DIM. 'A'
VS2	.461 [11.70]
VS3	.630 [16.00]



P.C. MOUNTING



3MN-Series Dimensional Specifications: in. [mm]


Termination Options

VS2-VS3 Double Pole





OPTION CODE	DIM.'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C.MOUNTING




VS4-VS5 Single Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




VS4-VS5 Double Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




VS6-VS7 Single Pole

(FOR B6 BUSHING ONLY)



OPTION CODE	DIM.'A'
VS6	.461 [11.70]
VS7	.630 [16.00]



P.C.MOUNTING



3MN-Series Dimensional Specifications: in. [mm]


Termination Options

VS6-VS7 Double Pole (FOR B6 BUSHING ONLY)





OPTION CODE	DIM.'A'
VS6	.461 [11.70]
VS7	.630 [16.00]

P.C. MOUNTING




VS8-VS9 Single Pole (FOR B6 BUSHING ONLY)





OPTION CODE	DIM.'A'
VS8	.461 [11.70]
VS9	.630 [16.00]

P.C. MOUNTING




VS8-VS9 Double Pole (FOR B6 BUSHING ONLY)




OPTION CODE	DIM.'A'
VS8	.461 [11.70]
VS9	.630 [16.00]

P.C. MOUNTING




Snap-In Termination Options

VS21, VS31




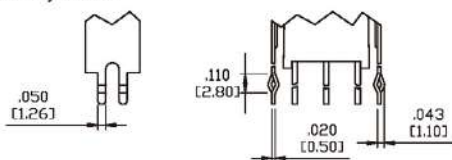


VS41, VS51

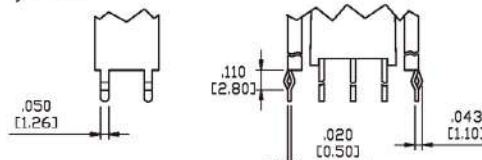


* PC Mounting for VS21, VS31, VS41, VS51 refer to VS2, VS3, VS4, VS5 respectively.

3MA-Series Dimensional Specifications: in. [mm]

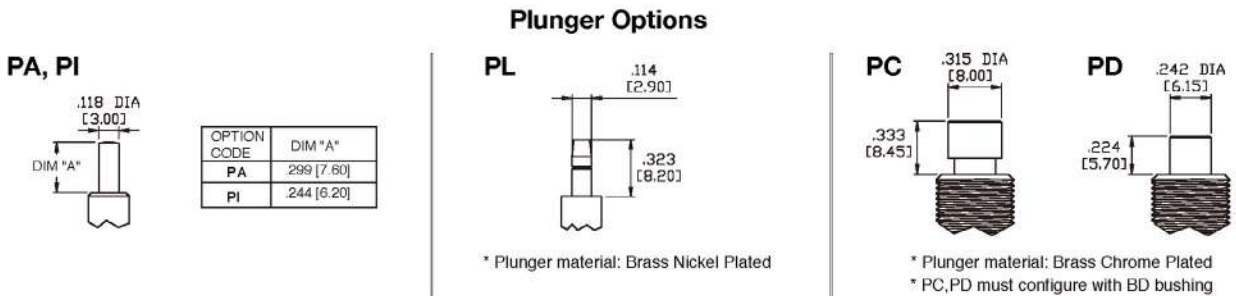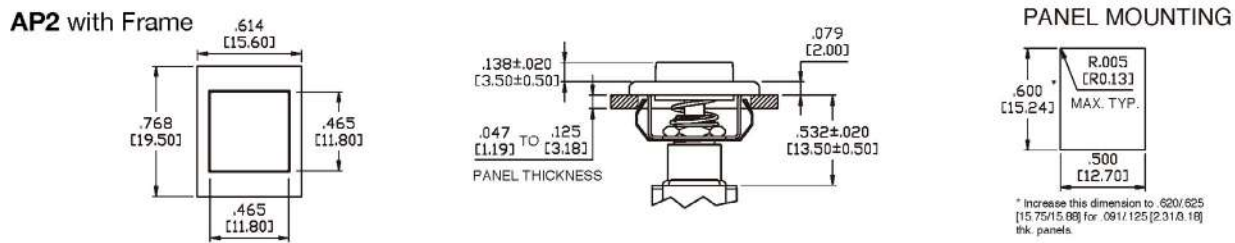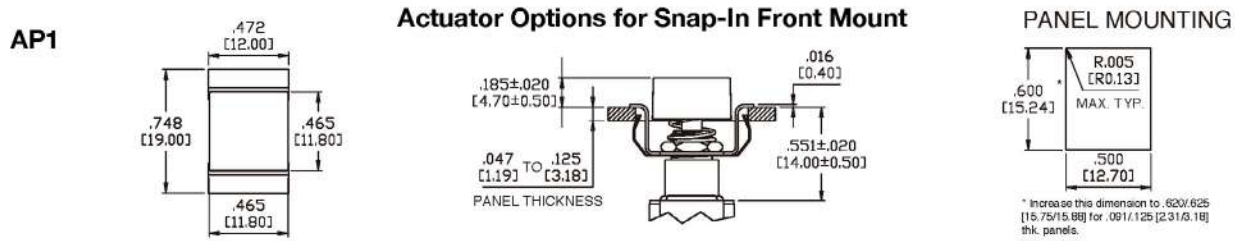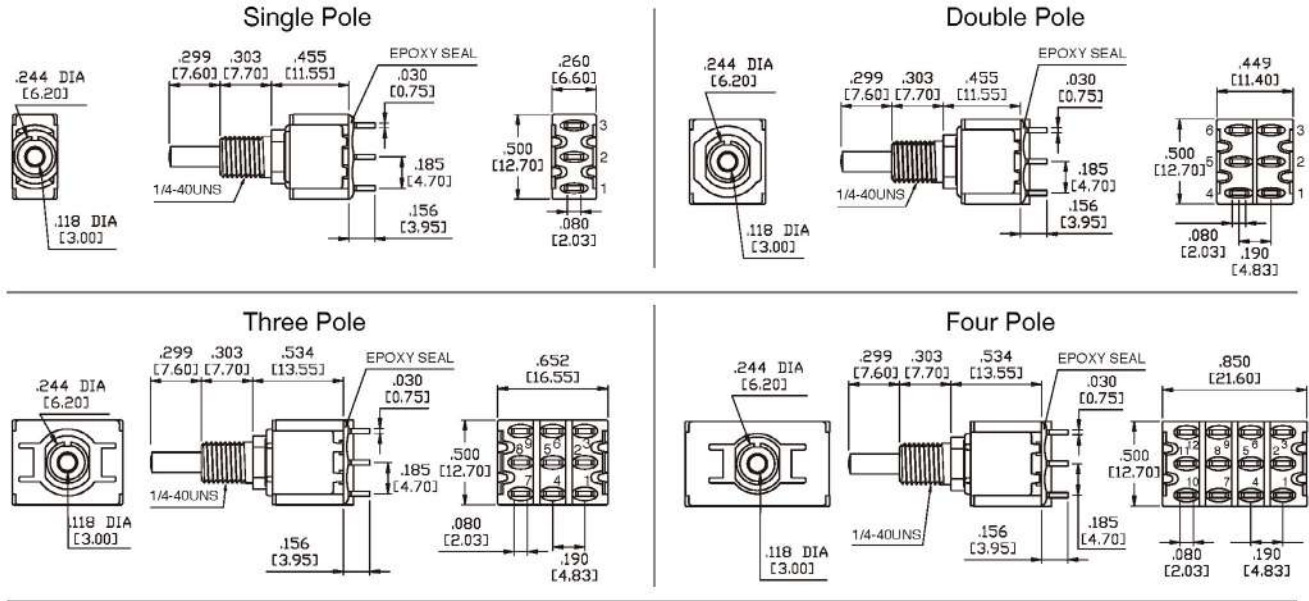


3MA-Series Dimensional Specifications: in. [mm]

B10 Threaded Standard
B20 Non-Threaded




Bushing Options

B21 Non-Threaded




BD Threaded Standard




Termination Options


M1 Standard Solder Lug



M2 PC Thru-Hole






M5 Wire Wrap




OPTION CODE	DIM. 'A'
M5-1	.750 [19.05]
M5-2	.964 [24.48]
M5-3	.425 [10.80]
M5-4	1.062 [26.97]




M6 Single Pole

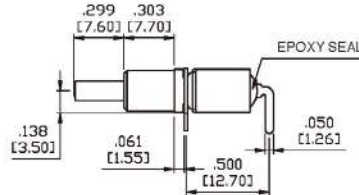


P.C. MOUNTING






M6 Double Pole

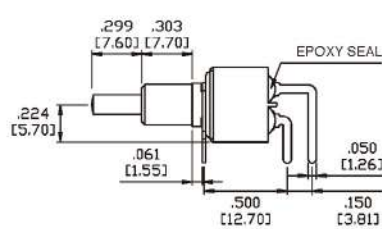


P.C. MOUNTING



M7 Single Pole

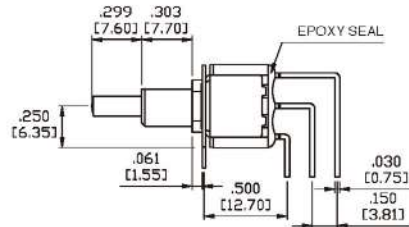




P.C. MOUNTING




3MA-Series Dimensional Specifications: in. [mm]

Termination Options




M7 Double Pole

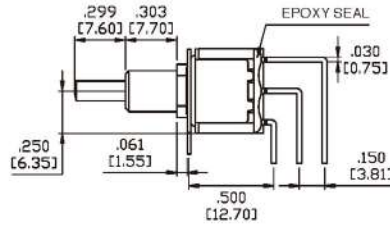


P.C.MOUNTING






M7 Three Pole

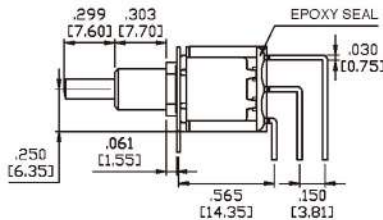


P.C.MOUNTING





M7 Four Pole

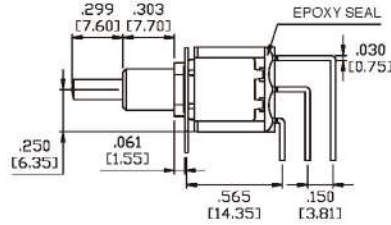

P.C.MOUNTING




VS2-VS3 Single Pole





OPTION CODE	DIM.'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C.MOUNTING




VS2-VS3 Double Pole



OPTION CODE	DIM.'A'
VS2	.461 [11.70]
VS3	.630 [16.00]



P.C.MOUNTING



3MA-Series Dimensional Specifications: in. [mm]


Termination Options

VS4-VS5 Single Pole





OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING




VS4-VS5 Double Pole



OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]


P.C.MOUNTING




Panel Mounting

1/4 INCH BUSHING


B10



B20




B21




15/32 INCH BUSHING

BD

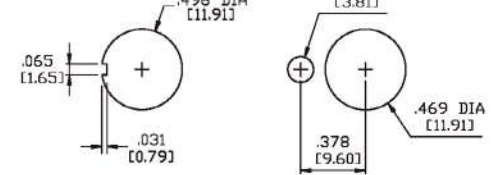


Plunger Caps



C1




C2



C3




C5




For PL plunger only

C6



For PD plunger only

C7



For PL plunger only


CAP AND FRAME COLORS			
1	White	6	Green
2	Black	7	Blue
3	Red	8	Brown
4	Orange	9	Gray
5	Yellow		

MATERIAL: ABS for C1~C5, C7
MATERIAL: Chrome plated brass for C6

4S-Series

SUBMINIATURE SLIDE SWITCHES

The 4S-Series sub-miniature slide switches feature maintained and momentary 2 or 3 position circuits, and offer a variety of ratings, contact materials, terminal platings, and mounting styles. These switches are able to withstand temperatures from -30°C to +85°C.

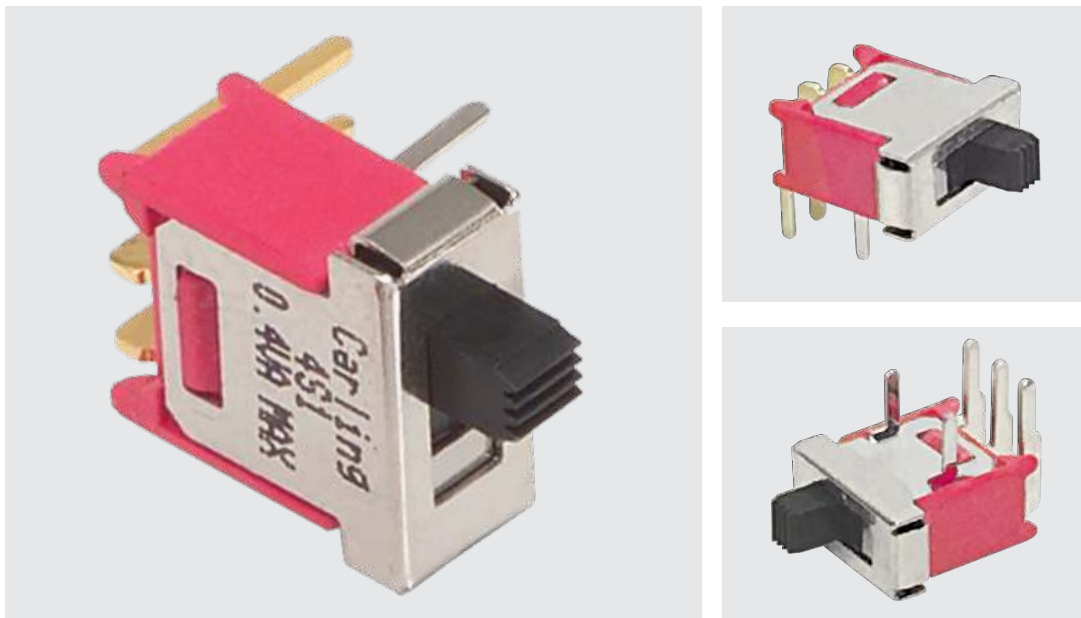

Product Highlights:

- ♦ Two or Three Position Circuitry
- ♦ Maintained or Momentary Action
- ♦ 125/250VAC or up to 28VDC
- ♦ Available in Silver, Gold or Tin Plating
- ♦ Supplied in Bulk or Tape Reel
- ♦ UL and CSA Approvals Available

Typical Applications:

- ♦ Consumer Electronics
- ♦ Instrumentation
- ♦ Computer Servers / Peripherals
- ♦ Test / Measurement

Resources:

[Download 3D CAD Files](#)

[IGS >](#) [STP >](#)

Electrical


Contact Rating	refer to ordering scheme
Electrical Life	30,000 make & break cycles @ full load
Contact Resistance	10 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts
Insulation Resistance	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level

Physical

Operating Temperature	-30°C to +85°C
Solder Heat Resistance	MIL-STD-202, Method 210

Material

Case	Dially phthalate (DAP) (UL 94V-0)
Slide Handle	Nylon
Housing	Stainless Steel
Terminal Seal	Epoxy

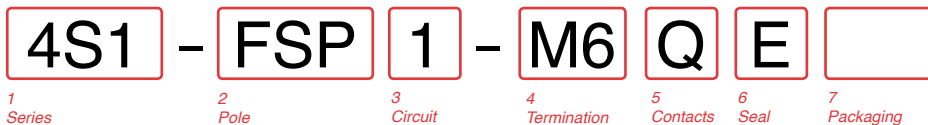

1 SERIES
4S1 Sub-Miniature Slide Switch

2 POLES
FSP Single Pole

3 CIRCUIT
 () - momentary
Position:

1	2-1 ON	2 Connected Terminals NONE	3	2-3 ON (ON)
2	ON	NONE		(ON)
3	ON	OFF		ON

4 TERMINATION

M2	PCB
M6	PC Mount, horizontal, right angle
M7	PC Mount, vertical, right angle
M71	Snap-In, vertical, right angle

5 CONTACTS / TERMINALS
Contact Material Terminal Plating Rating

G	silver ¹	gold over silver	3A 125VAC or 28VDC; 1.5A 250VAC
K	gold ^{2,5}	tin ^{4,7}	0.4VA max 20V max (AC/DC)
P	silver ^{1,6}	tin ^{4,7}	3A 125VAC or 28VDC; 1.5A 250VAC
Q	silver ¹	silver ¹	3A 125VAC or 28VDC; 1.5A 250VAC
R	gold ²	gold ³	0.4VA max 20V max (AC/DC)

6 EPOXY SEAL




E	Epoxy Seal	0	without Epoxy Seal
----------	------------	----------	--------------------

7 PACKAGING
T/R tape reel - 500 pieces per reel
 Switches are bulk packed, unless T/R is specified at the end of the part number.

Notes:
 1 Movable contact / terminal platings: silver over copper alloy
 2 Movable contact platings: gold over nickel over copper alloy
 3 Terminal platings: gold over nickel over copper alloy
 4 Terminal platings: tin over copper alloy, available with PC type terminations only
 5 Terminal contact platings: gold over nickel alloy
 6 Terminal contact platings: silver over nickel alloy
 7 Tin option available with PC type terminations only

4S1-Series Dimensional Specifications: in. [mm]




M2 Single Pole




P.C.MOUNTING



M6 Single Pole






P.C.MOUNTING




M7 Single Pole

M71 Snap-In Termination Single Pole



P.C.MOUNTING




*Manufacturer reserves the right to change product specification without prior notice.

4M-SERIES

4M-Series

MINIATURE SLIDE SWITCHES

The 4M-Series miniature slide switches offer a variety of ratings, circuits, contact materials, and terminal platings. With 14 termination choices and 8 actuator styles, this versatile switch adapts to a variety of applications, and is able to withstand temperatures from -30°C to +85°C.

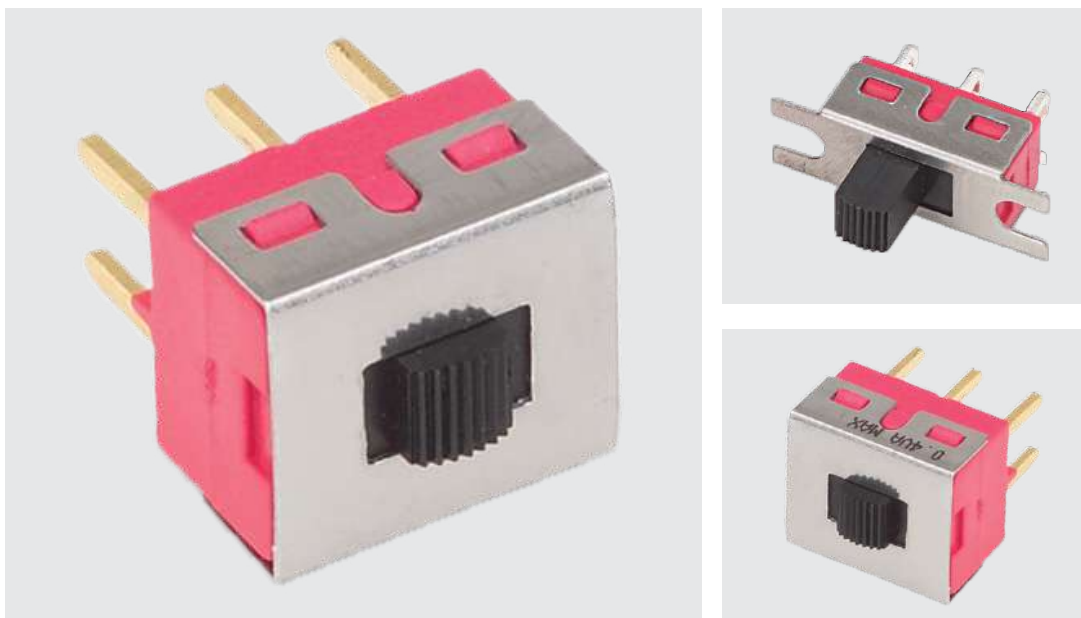

Product Highlights:

- ♦ Two or Three Position Circuitry
- ♦ 125/250VAC or up to 28VDC
- ♦ Available in Silver, Gold or Tin Plating
- ♦ Supplied in Bulk or Tape Reel
- ♦ UL and CSA Approvals Available

Typical Applications:

- ♦ Consumer Electronics
- ♦ Instrumentation
- ♦ Computer Servers / Peripherals
- ♦ Test / Measurement

Resources:

[Download 3D CAD Files](#)

[IGS >](#) [STP >](#)

Electrical


Contact Rating	refer to ordering scheme
Electrical Life	30,000 make & break cycles @ full load
Contact Resistance	10 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts
Insulation Resistance	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level

Physical

Operating Temperature	-30°C to +85°C
Solder Heat Resistance	MIL-STD-202, Method 210

Material

Case	Dially phthalate (DAP) (UL 94V-0)
Slide Handle	Nylon
Housing	Stainless Steel
Terminal Seal	Epoxy

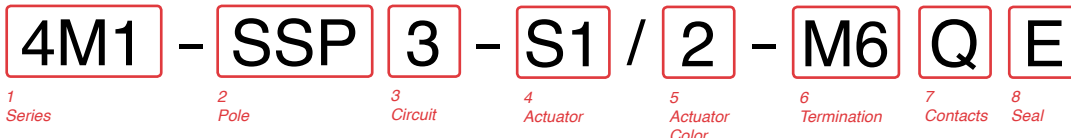

1 SERIES
4M1 Miniature Slide Switch

2 POLES
SSP Single Pole **SDP** Double Pole

3 CIRCUIT
 () - momentary
Switching Position:

1	2-1, 5-4	2	Connected Terminals	3	2-3, 5,6
1	ON	NONE		ON	
3	ON	OFF		ON	

4 ACTUATOR

S1 .201" height	S5 .053" height (for DPDT only)
S2 .301" height	S6 .488" height
S3 .370" height	S7 .311" height
S4 .140" height	T1 .209" height (for DPDT only)

5 ACTUATOR COLORS

1 White	6 Green
2 Black	7 Blue
3 Red	8 Brown
4 Orange	9 Gray
5 Yellow	

6 TERMINATION

M1 Solder Lug	M61 Snap-In, 90°
M2 PCB	M7 PC Mount, 90° vertical
M3 Quick Connect	M71 Snap-In, 90°
M51 Wire Wrap .750	VS2 PC Mount, U bracket, .350 height
M52 Wire Wrap .964	VS3 PC Mount, U bracket, .575 height
M53 Wire Wrap .425	N1 Solder Lug without mounting tabs
M54 Wire Wrap 1.062	
M6 PC Mount, 90° horizontal	

7 CONTACTS / TERMINALS



	Contact Material	Terminal Plating	Rating	Approvals
G	silver ¹	gold over silver	5A 125VAC or 28VDC 2A 250VAC	FA, CE
K	gold ²	tin ^{3,5}	0.4VA max 20V max (AC/DC)	N/A
P	silver ¹	tin ^{3,5}	5A 125VAC or 28VDC 2A 250VAC	FA, CE
Q	silver ¹	silver ¹	5A 125VAC or 28VDC 2A 250VAC	FA, CE
R	gold ²	gold ²	0.4VA max 20V max (AC/DC)	N/A

8 EPOXY SEAL

E Epoxy Seal	0 without Epoxy Seal
---------------------	-----------------------------


Notes:
 1 Movable contact & terminal platings: silver over copper alloy
 2 Movable contact & terminal platings: gold over nickel over copper alloy
 3 Terminals platings: tin over nickel over copper alloy, available with PC terminations only
 4 Non-Black, white and red colors require a minimum order of 2500 pieces
 5 Tin option available with PC type terminations only

4M1-Series Dimensional Specifications: in. [mm]

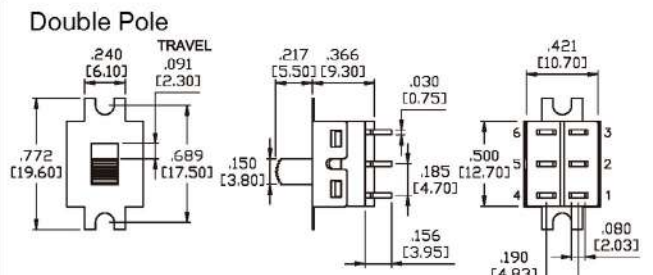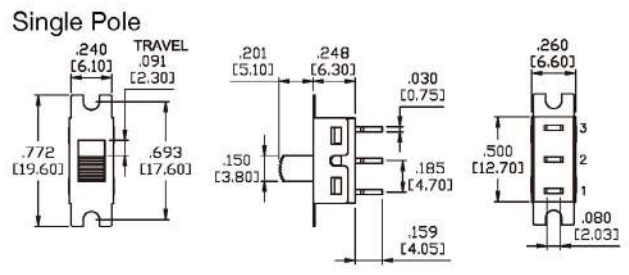

Actuator Options


* All actuator length shown is SPDT model with M1 and M2 terminals.

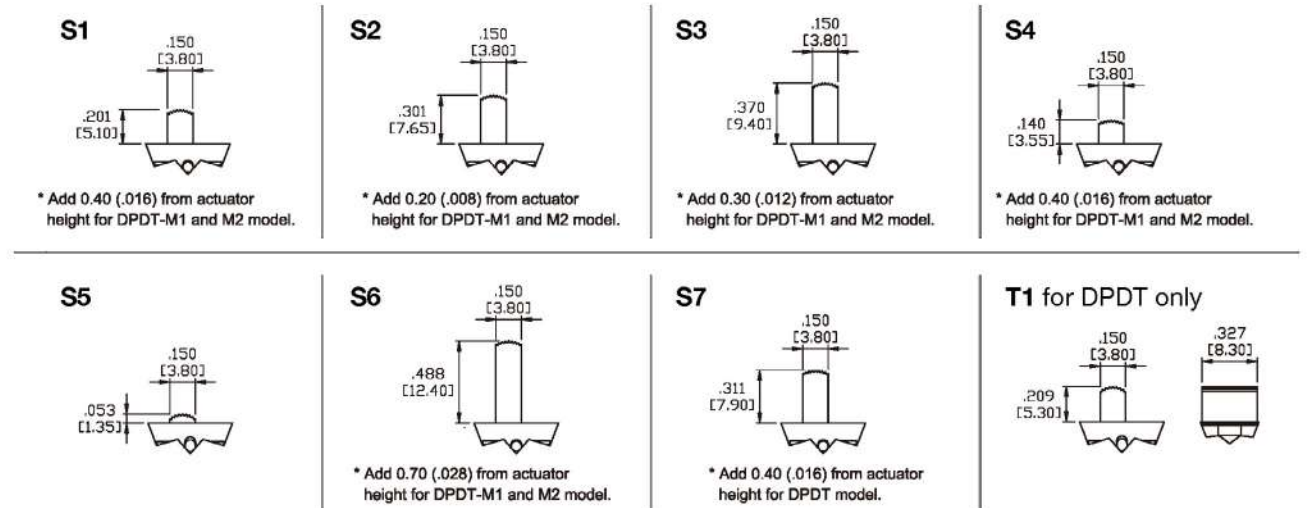

4M1-Series Dimensional Specifications: in. [mm]


Termination Options

M1 Standard Solder Lug




* Standard with Mounting Tabs.


M2 PC Thru-Hole



M3 Quick Connect







M5 Wire Wrap







OPTION CODE	DIM. 'A'
M5-1	.750 [19.05]
M5-2	.964 [24.48]
M5-3	.425 [10.80]
M5-4	1.062 [26.97]

Termination Options without Mounting Tabs




N1 Single Pole




N1 Double Pole






M6 Single Pole




P.C. MOUNTING






M6 Double Pole




P.C. MOUNTING



M7 Single Pole





P.C. MOUNTING




4M1-Series Dimensional Specifications: in. [mm]

Termination Options



M7 Double Pole

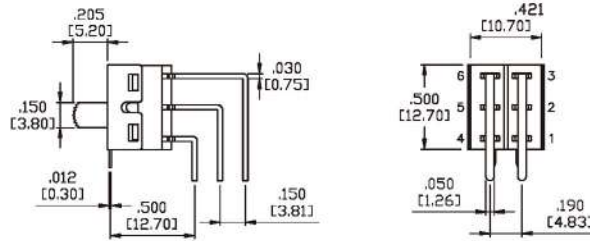


P.C.MOUNTING





VS2 Single Pole




P.C.MOUNTING





VS2 Double Pole




P.C.MOUNTING





VS3 Single Pole




P.C.MOUNTING




VS3 Double Pole




P.C.MOUNTING




Dimensions: in. [mm]

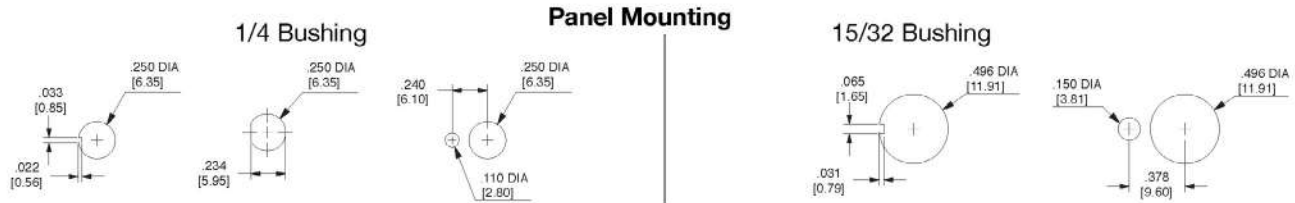


NUTS

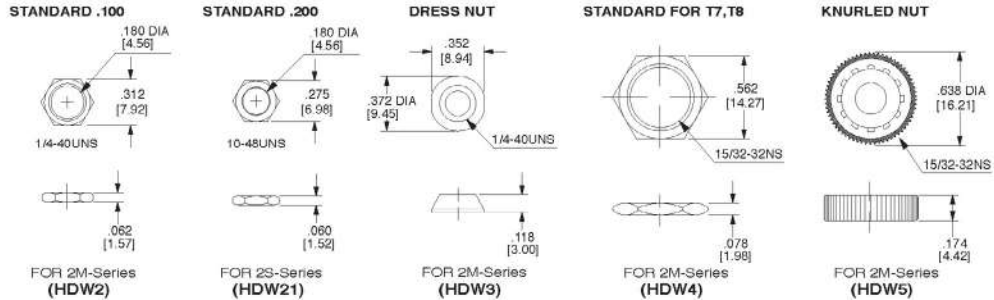

Locking Rings

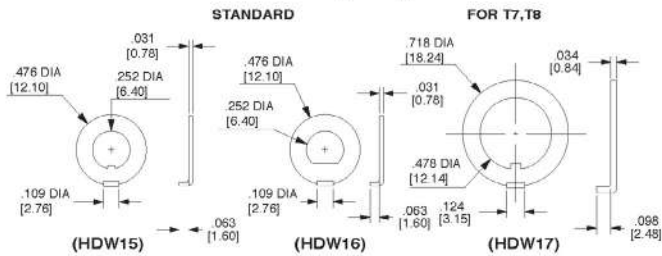

Locking Washers

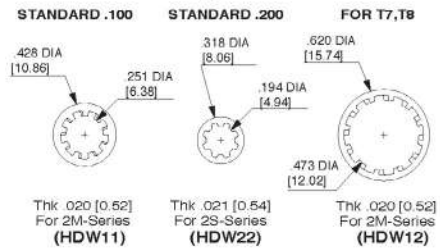

Toggle Caps


T1 Actuator Cap



T2 Actuator Cap




T9 Actuator Gloss Plastic




Plunger Caps


C1




C2




C3




C4




C5



C6



C7




CAP AND FRAME COLORS			
1	White	6	Green
2	Black	7	Blue
3	Red	8	Brown
4	Orange	9	Gray
5	Yellow		

MATERIAL: ABS for C1-C5, C7
MATERIAL: Chrome plated brass for C6

Dimensions: in. [mm]

Rubber Boots


2M1-E1A Rubber Boot



E1A with Internal O-Ring Seal
K1=METRIC M6 THREADED (For B8 bushing only)


* FOR 2M1-SERIES, T1 ACTUATOR ONLY (not available with B0 bushing)

2M1-YE1A06 Rubber Boot

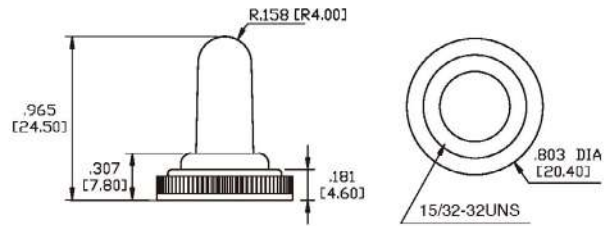


* FOR 2M1-SERIES, T8 ACTUATOR and B0 BUSHING ONLY

2M1-YE1E06 Rubber Boot

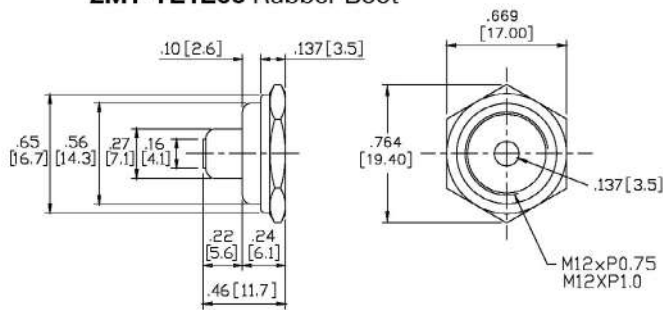

* FOR 2M1-SERIES, T7 & T8 ACTUATORS and B0 BUSHING ONLY

2M1-YE1D06 Rubber Boot

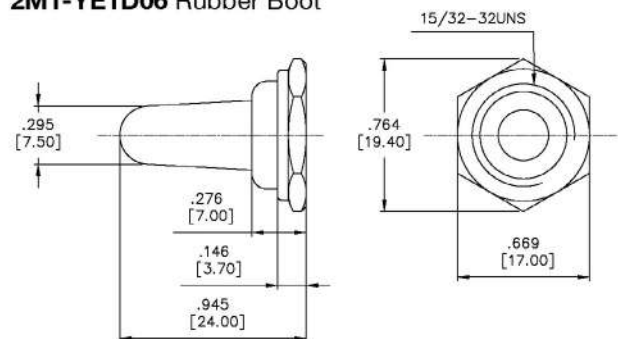

* FOR 2M1-SERIES, T8 ACTUATOR and B0 BUSHING ONLY

Accessory Photos:

E1A



YE1A06



T9



T1



T2



Hardware Table				
Series	Bushing	Nut	Washer	Locking Ring
1S1	Rocker	none	none	none
1SS	Rocker	none	none	none
1SM	Rocker	none	none	none
1M1	Rocker	none	none	none
1MS	Rocker	none	none	none
2S1	B1	2M1-HDW21 *2 pieces	2M1-HDW22 *1 piece	none
	B2, B4, B6, B8	none	none	none
	B3	2M1-HDW21 *2 pieces	2M1-HDW22 *1 piece	none
	B5	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	none
	B7	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	none
2SM	N/A	none	none	none
2SS	B4	none	none	none
2M2/2MS	B4	none	none	none
	B1	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW15 *1 piece
2M1	B2, B4	none	none	none
	B1, B3	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW15 *1 piece
	B5	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW16 *1 piece
	B6	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW15 *1 piece
	B7	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW16 *1 piece
	B8	2M1-HDW6 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW14 *1 piece
	B9	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW16 *1 piece
	B0	2M1-HDW4 *2 pieces	2M1-HDW17 *1 piece	2M1-HDW12 *1 piece
2M1H	BJ, BK	2M1-HDW4 *1 piece	3MNH-WCP WCP-0872 (O-Ring) *1 piece	none
3MNH	BJ, BL	2M1-HDW4 *1 piece	3MNH-WCP WCP-0872 (O-Ring) *1 piece	none
3S1	B6, B7, B0, B9	none	none	none
	B5	2M1-HDW21 *2 pieces	2M1-HDW22 *1 piece	2M1-HDW16 *1 piece
	B8	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	none
3SS	N/A	none	none	none
3SM	N/A	none	none	none
3MN	B6, B20, B21	none	none	none
	B10	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW15 *1 piece
	B11	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW16 *1 piece
3MS	B1	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW15 *1 piece
	B4	none	none	none
3MA	B20, B21	none	none	none
	BD	2M1-HDW4 *2 pieces	2M1-HDW12 *1 piece	2M1-HDW17 *1 piece
	B10	2M1-HDW2 *2 pieces	2M1-HDW11 *1 piece	2M1-HDW15 *1 piece
4S1	Slide	none	none	none
4M1	Slide	none	none	none
4PM	Slide	none	none	none

Below is a list of useful product catalogs.

Please scan the QR codes below or visit carlingtech.com/onthego for complete details.

WEBSITE

Product Selector, Resources, Configurit, Find Rep, Product Materials and Videos.



carlingtech.com



/onthego

SWITCHES AND CONTROLS

Rocker, toggle, pushbutton, rotary, battery disconnects and controls.



catalog

MINI & SUB-MINI SWITCHES

Sealed and non-sealed rocker, toggle, pushbutton and slide options.



catalog

HYDRAULIC-MAGNETIC CIRCUIT PROTECTION

1-6 poles from .02 to 700A with CSA, VDE, TUV, UL489, UL489A, UL1500 approvals.



catalog

THERMAL CIRCUIT PROTECTION

1 pole from 3 to 60A with UL, cUL, CE, UL1500/ISO 8846 approvals.



catalog

GFCI/ELCI CIRCUIT PROTECTION

1-3 poles from 0.10 to 50A with CSA, UL489, UL1077, UL1053, UL1500 approvals.



catalog

Below is a list of useful market specific catalogs and brochures.
Please scan the QR codes below or visit carlingtech.com/onthego for complete details.

ON-OFF HIGHWAY

Switches, Controls and Custom Solutions



catalog



brochure

MARINE

Circuit Protection and Switches




catalog



brochure

RENEWABLE ENERGY

Circuit Breakers and Disconnect products



catalog



brochure

MILITARY

COTS Switches and Circuits Breakers



catalog



brochure

TELECOM/DATACOM

Hydraulic-Magnetic Circuit Breakers



catalog



brochure

INDUSTRIAL AUTOMATION

Switches and Circuit Breakers



brochure

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications

Worldwide Headquarters

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062-1177
Phone: 860.793.9281 **Fax:** 860.793.9231
Email: sales@carlingtech.com www.carlingtech.com

Northern Region Sales Office: nrsm@carlingtech.com
Southeast Region Sales Office: sersm@carlingtech.com
Midwest Region Sales Office: mrsm@carlingtech.com
West Region Sales Office: wrsm@carlingtech.com
Latin America Sales Office: larsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific Ltd.,
Suite 1607, 16/F Tower 2, The Gateway, Harbour City,
25 Canton Road, Tsimshatsui, Kowloon, Hong Kong
Phone: Int + 852-2737-2277 **Fax:** Int + 852-2736-9332
Email: sales@carlingtech.com.hk

Shenzhen, China: shenzhen@carlingtech.com
Shanghai, China: shanghai@carlingtech.com
Pune, India: india@carlingtech.com
Kaohsiung, Taiwan: taiwan@carlingtech.com
Yokohama, Japan: japan@carlingtech.com

Europe | Middle East | Africa Headquarters

Carling Technologies LTD
4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK
Phone: Int + 44 1392.364422 **Fax:** Int + 44 1392.364477
Email: ltd.sales@carlingtech.com

Germany: gmbh@carlingtech.com
France: sas@carlingtech.com

